ENPAC

DRIVE-OVER SPILL CONTAINMENT.

FOAM WALL BERM

THE FRACKING INDUSTRY FAVORITE

With easy setup, long-lasting durability, and versatile performance, the Stinger Spillpal Foam Wall Berm provides dependable spill containment.



16 Standard Sizes and Custom Options (see p.2)



QUICK ASSEMBLY



DRIVE-OVER FOAM LOGS



FULLY CONTAIN EQUIPMENT & TRUCKS


KEY FEATURES

- True drive in and drive out capability
- Easy to assemble for immediate response
- Folds for compact storage and transport
- Fuel & chemically resistant containment area
- Standard material: EnDuraLine 40. Other materials available: PVC, Elvaloy Copolymer, Ultra Low-Temp, custom materials

- Stinger Spillpal Foam Wall Berm
- 48-GP: Ground Pad for Spill Containment Berms
- 48-TM: TracMat for Spill Containment Berms

ACCESSORIES

TracMat (1) and Ground Pad (2) are available to protect and prolong the life of the spill berm.

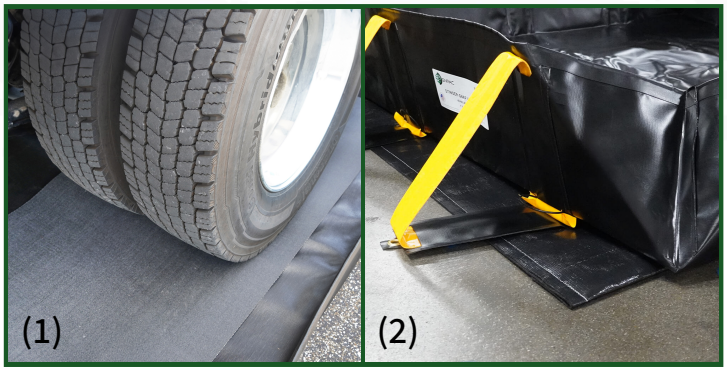

PROTECTING PEOPLE, PROPERTY, AND OUR PLANET.

GLOBAL LEADER in spill containment solutions

TRUSTED QUALITY Engineered for safety and performance

FAST & RELIABLE Shipping solutions to meet your needs

EXPERT SUPPORT Dedicated team ready to help

1-800-9ENPAC9 | info@ENPAC.com | www.ENPAC.com

SIZES AND USES

Small sizes commonly contain light plants, generators, light equipment, 55-gallon drums, and IBCs

Medium sizes include containment for medium-size equipment, small vehicles, IBCs, and machinery

Large sizes commonly contain large tankers, military vehicles, large equipment, and bulk storage of drums/IBCs



CUSTOM SIZES AVAILABLE

Part Number	Containment Dimensions L x W x H	Spill Capacity
BD-44-FW	4 ft x 4 ft x 4 in (1.2m x 1.2 m x 10.1 cm)	39 gal (147 L)
BD-66-FW	6 ft x 6 ft x 4 in (1.8 m x 1.8 m x 10.1 cm)	89 gal (336 L)
BD-68-FW	6 ft x 8 ft x 4 in (1.8 m x 2.4 m x 10.1 cm)	119 gal (450 L)
BD-810-FW	8 ft x 10 ft x 4 in (2.4 m x 3 m x 10.1 cm)	199 gal (753 L)
BD-1010-FW	10 ft x 10 ft x 4 in (3 m x 3 m x 10.1 cm)	249 gal (942 L)
BD-1020-FW	10 ft x 20 ft x 4 in (3 m x 6 m x 10.1 cm)	498 gal (1,885 L)
BD-1030-FW	10 ft x 30 ft x 4 in (3 m x 9.1 m x 10.1 cm)	748 gal (2,831 L)
BD-1040-FW	10 ft x 40 ft x 4 in (3 m x 12.1 m x 10.1 cm)	997 gal (3,774 L)
BD-1050-FW	10 ft x 50 ft x 4 in (3 m x 15.2 m x 10.1 cm)	1,246 gal (4,716 L)
BD-1212-FW	12 ft x 12 ft x 4 in (3.6 m x 3.6 m x 10.1 cm)	359 gal (1,358 L)
BD-1220-FW	12 ft x 20 ft x 4 in (3.6 m x 6 m x 10.1 cm)	598 gal (2,263 L)
BD-1230-FW	12 ft x 30 ft x 4 in (3.6 m x 9.1 m x 10.1 cm)	891 gal (3,372 L)
BD-1240-FW	12 ft x 40 ft x 4 in (3.6 m x 12.1 m x 10.1 cm)	1,196 gal (4,527 L)
BD-1250-FW	12 ft x 50 ft x 4 in (3.6 m x 15.2 m x 10.1 cm)	1,496 gal (5,662 L)
BD-2525-FW	25 ft x 25 ft x 4 in (7.6 m x 7.6 m x 10.1 cm)	1,558 gal (5,897 L)
BD-2550-FW	25 ft x 50 ft x 4 in (7.6 m x 15.2 m x 10.1 cm)	3,111 gal (11,776 L)

*The berm capacity is based on dimensions, low flow rate, a level surface, and no displaced volume.
Regulations: EPA 40 CFR 264.175, SPCC, NPDES

