1-800-936-7229
www.enpac.com

Product Instructions

Spill Cart

SKU: 5200

Important Information

- **Two people** are recommended to assemble the handle and caster wheels.

Tools required


- Hammer
- 1/2" Socket Wrench
- 1/2" Combination Wrench

Parts Included

- (1) Cart Sump
- (1) Grate

Parts inside the sump for shipping:

- (1) Handle
- (2) Stationary Wheels
- (2) Swivel Casters
- (6) Wheel Washers
- (8) 5 1/2" Bolts
- (8) 5 1/2" Flange Nuts
- (2) Cotter Pins

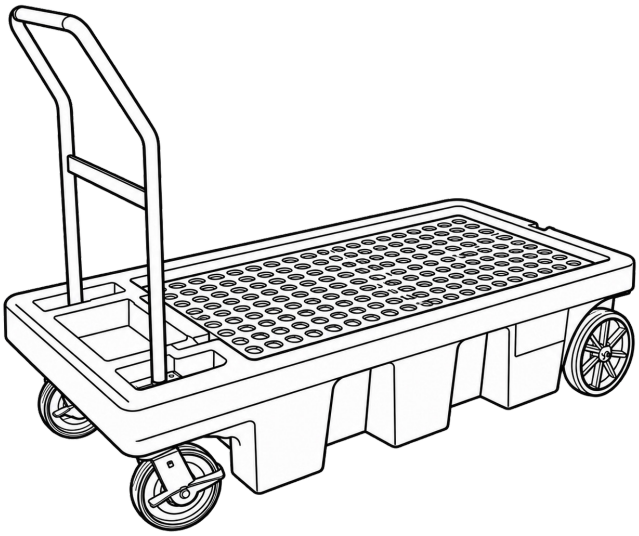


Assembly Instructions

Note: Some spill carts may have the stationary rear wheels on for shipping purposes. For these units, skip to step 4.

1. Place two washers on the axle, then slide a stationary rear wheel (the hub should be facing towards the cart), then slide another washer, and finally, install the cotter pin into the end of the axle. (See Fig. 1)
2. Bend the end of the cotter pin.
3. Repeat on the other side.

Fig. 1

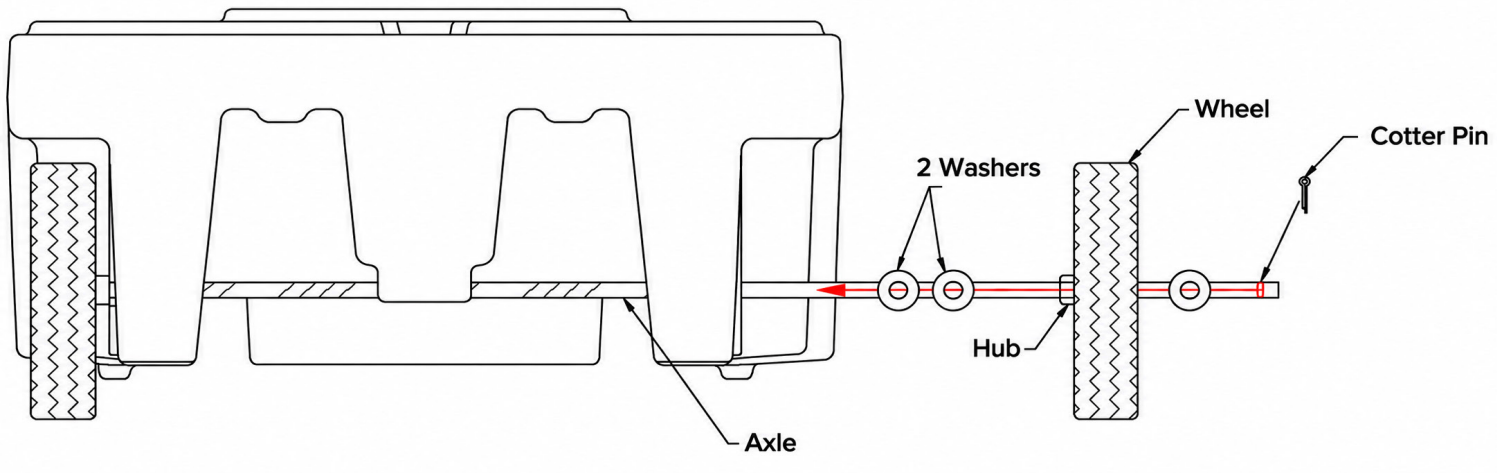

4. Position the ends of the handle in molded holes on the top of the cart. Slide the handle evenly through the holes until the flanges are flat against the cart.
5. For swivel caster installation, elevate the cart to a convenient working height to insert a bolt through the handle flange.
6. While one person holds the bolt secure, another person may fasten a caster to the bolt using a flange nut. Loosely thread the nut onto the bolt. Do NOT tighten the nut.
7. Repeat step six with the remaining three bolts. (See Fig. 2 and 3)

Fig. 2


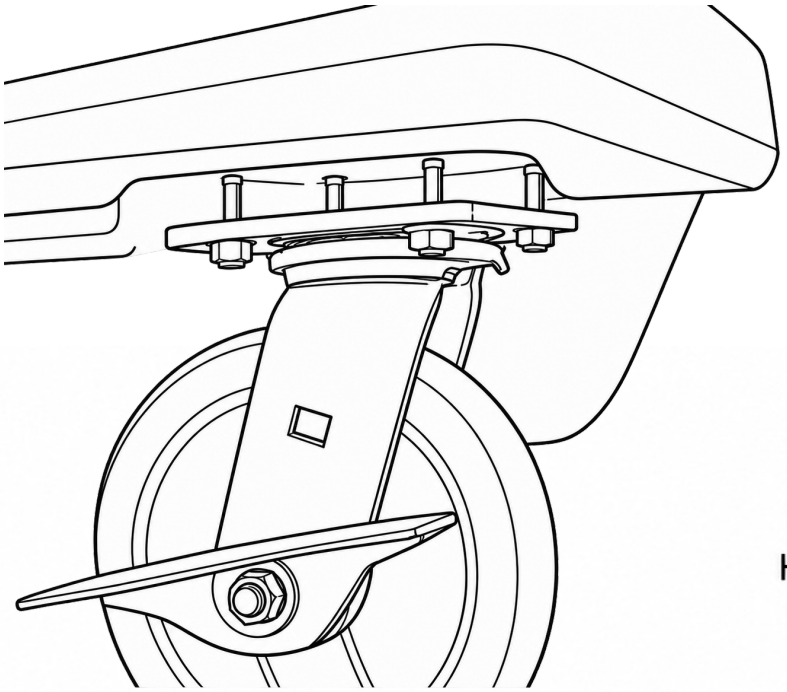


Fig. 3

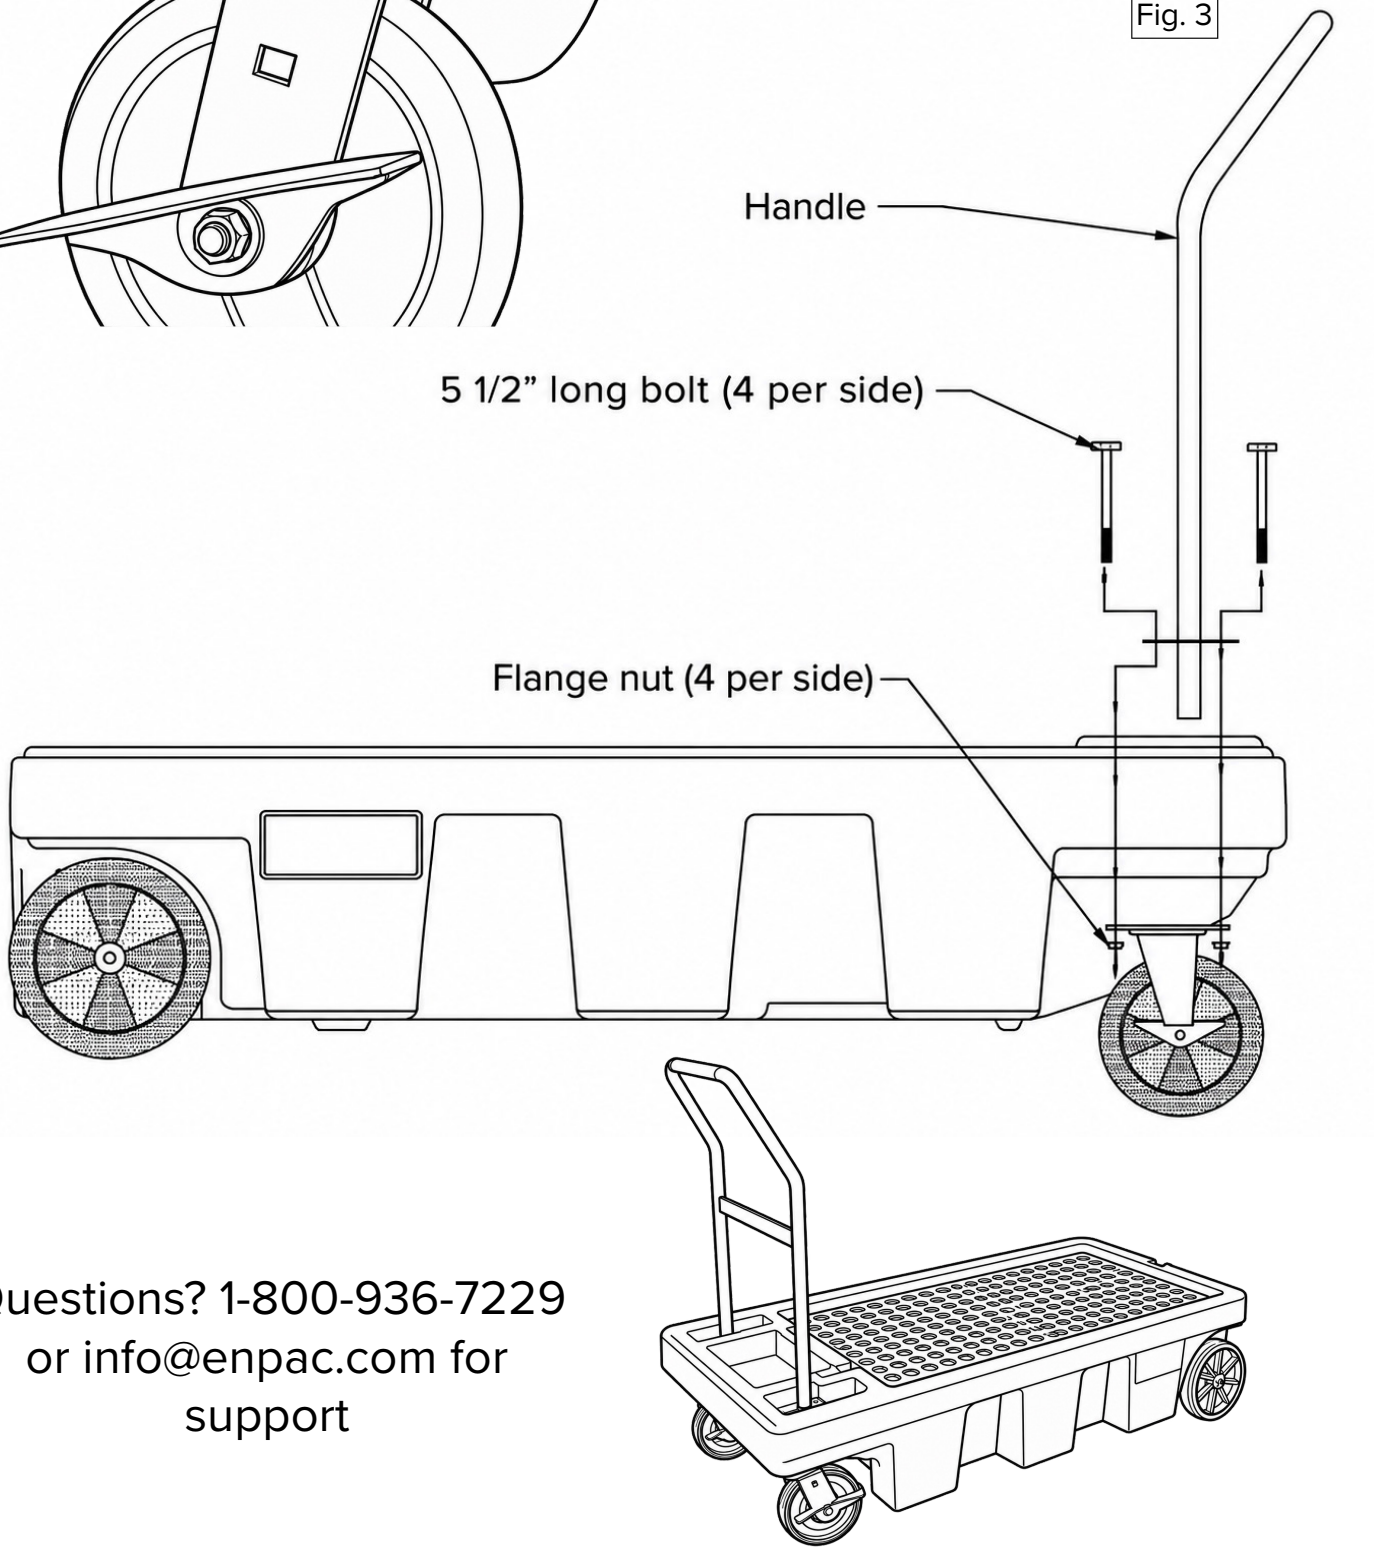

Questions? 1-800-936-7229 or info@enpac.com for support