



- SPILL CONTAINMENT
- SALVAGE + OVERPACK DRUMS
- SPILL PALLETS
- SORBENTS
- SPILL RESPONSE
- PORTABLE CONTAINMENT
- SPILL KITS
- STORMWATER

# 2025

PRODUCT CATALOG

# TABLE OF CONTENTS

▶ SALVAGE + OVERPACK DRUMS .....	05
▶ SPILL PALLETS .....	13
▶ DISPENSING & STORAGE.....	33
▶ CYLINDER STORAGE .....	49
▶ SPILL BERMS .....	55
▶ PORTABLE CONTAINMENT.....	75
▶ STORMWATER.....	83
▶ SPILL KITS .....	93
▶ SORBENTS .....	113
▶ CHEMICAL COMPATIBILITY AND REGULATIONS .....	121





## ► INTRODUCTION

ENPAC® was founded in 1988 with a focus on protecting the environment from hazardous chemicals by providing customers with high-quality and affordable containment solutions. It all began with one product, the 95-gallon salvage drum, which was designed to protect the environment when transporting hazardous materials. Since then, with dedication to innovation and growth, ENPAC® has introduced over 800 market leading products. We strive to create durable products engineered to transport hazardous materials safely, comply with government regulations, and be your everyday containment solution.

ENPAC® has never strayed from the core principle of superior products and continues to perform extensive quality control practices that ensure optimum performance across the globe. With our American made products and 35 years of experience, ENPAC® is the global leader in spill prevention, containment, and control products.

**ENPAC® is a brand that you can trust!**

1988

ENPAC is founded with the 95-Gallon Salvage Drum.

2005

ENPAC® Flexibles division was created using industrial fabrics to manufacture portable containment.

2013

ENPAC® introduces the Black Diamond Eco Solutions® product line offering practical alternatives while not sacrificing quality.

2021

ENPAC® acquires Plug N' Dike, the manufacturer of a non-toxic paste used to instantly plug leaks in fuel tanks, steel drums, and other metal containers.



**BLACK DIAMOND**  
—ECO SOLUTIONS—

Black Diamond, an ENPAC® brand, offers spill control products that are innovative and engineered to help customers maintain environmental compliance without breaking the bank!

Black Diamond ECO Solutions® was created to offer practical alternatives for all your spill containment needs. The Black Diamond line strives to bring the exact product you want, where and when you need it, at a price you can afford.

Low price does not have to equal low quality! Tested to the same standards as their ENPAC® counterparts, this product line is engineered to meet regulations, have realistic specifications, and is built to last. The use of up to 100% recycled polyethylene, reduced load ratings, and/or alternative designs equates to big performance at a little price.

At Black Diamond, we believe that there's no need to sacrifice purpose for price. That's why ENPAC® offers products that meet secondary spill containment requirements for every budget!

Look for the  symbol throughout the catalog for the Black Diamond brand.





# SALVAGE + OVERPACK DRUMS

ENPAC® is proud to be the leader in American-made, top quality plastic secondary containment drums. ENPAC®'s lineup of salvage drums, overpacks, and SpillPacks are engineered to be the toughest and most reliable drums in the industry.






# ▶ WHAT IS A SALVAGE DRUM?

A salvage drum is much more than your average drum or overpack. Designed specifically to prevent spills of hazardous materials during transport, a salvage drum must undergo rigorous testing to meet UN Ratings administered by the DOT. ENPAC® salvage drums are tested internally by a team of specialized engineers to simulate real-life scenarios which ensures complete compliance and protection.

Qualified to self-certify by the Pipeline and Hazardous Materials Safety Administration (PHMSA), ENPAC® tests salvage drums to meet the following DOT standards:

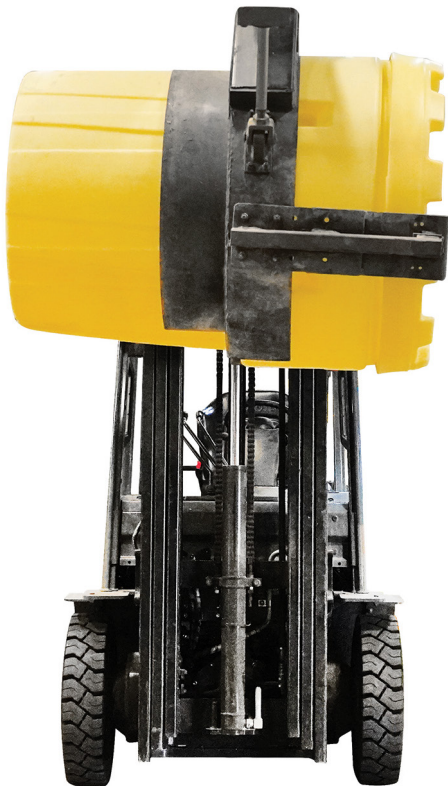

## **LEAKPROOFNESS TEST (DOT 49 CFR 178.604)**

Drums filled with compressed air must pass a specified pressure test for a minimum of five minutes with no leaks.

## **STACK TEST (DOT 49 CFR 178.606)**

The unit is required to be stacked three meters high with the rated load for 24 hours.

## **DROP TEST (DOT 49 CFR 178.603)**

Drums are required to be dropped from a height determined by the packing group without sustaining cracking or damage.

## **VIBRATION TEST (DOT 49 CFR 178.608)**


The packaging must withstand vibrations of a specified frequency for 60 minutes without ruptures or leaks. This test is required only for new designs or substantial modifications.

Once certified, each drum must be labeled with the term SALVAGE or SALVAGE DRUM and with the proper UN markings.

## **KEY FEATURES:**

- Engineered to be the toughest, most reliable drums in the industry
- Made from durable, UV-resistant polyethylene
- Screw-top lid for quick and easy access
- Corrosion-resistant
- Weatherproof
- Ideal for transportation of hazardous material and as a spill kit container

## UN RATINGS EXPLAINED

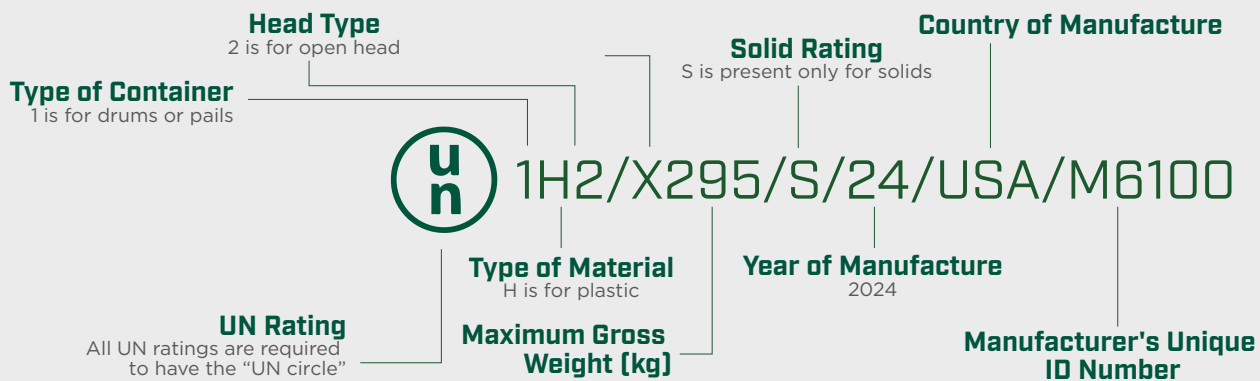

# ▶ 95-GALLON SALVAGE DRUM

The Future of Salvage Drums is Here!

The newest iteration of ENPAC®'s original product represents the future of salvage drums. Taking industry standards to a whole new level, ENPAC® introduces the newest 95-gallon overpack and salvage drum. Engineered with safety in mind, the innovative 1095-YE stacks, locks, and transports more securely and efficiently than any other drum on the market.





## 20-GALLON SALVAGE DRUM



### 1220-YE

Top Diameter	22.25 in. (56.5 cm.)
Bottom Diameter	18 in. (45.7 cm.)
Height	19 in. (22.9 cm.)
Weight	10.5 lbs. (47.8 kg.)
Spill Capacity	20 gal. (75.7 L.)
Load Capacity	166 lbs. (75.3 L.)

Regulations: UN 1H2/X295/S, DOT 49 CFR 173.3(c), EPA, SPCC and NPDES



## 30-GALLON SALVAGE DRUM



### 1230-YE

Top Diameter	22.25 in. (56.5 cm.)
Bottom Diameter	18 in. (45.7 cm.)
Height	30 in. (76.2 cm.)
Weight	13.5 lbs. (6.1 kg.)
Spill Capacity	30 gal. (113.6 L.)
Load Capacity	220 lbs. (99.8 kg.)

Regulations: UN 1H2/X295/S, DOT 49 CFR 173.3(c), EPA, SPCC and NPDES



## 65-GALLON SALVAGE DRUM



### 1065-YE

Top Diameter	27.75 in. (70.5 cm.)
Bottom Diameter	23 in. (58.4 cm.)
Height	37.5 in. (95.3 cm.)
Weight	43 lbs. (19.6 kg.)
Spill Capacity	65 gal. (246.1 L.)
Load Capacity	440 lbs. (199.6 kg.)

Regulations: UN 1H2/X295/S, DOT 49 CFR 173.3(c), EPA, SPCC and NPDES



## 95-GALLON SALVAGE DRUM



### 1095-YE

Top Diameter	31.5 in. (80 cm.)
Bottom Diameter	25.88 in. (65.8 cm.)
Height	40 in. (102.2 cm.)
Weight	47 lbs. (21.3 kg.)
Spill Capacity	95 gal. (359.6 L.)
Load Capacity	650 lbs. (295 kg.)

Patents US Patent No. 9,592,927  
CA Patent No. 2,699,046

Regulations: UN 1H2/X295/S, DOT 49 CFR 173.3(c), EPA, SPCC and NPDES



## 95-GALLON ENVIROSALV SALVAGE DRUM



### 1295-YE

Top Diameter	32 in. (81.3 cm.)
Bottom Diameter	26 in. (66 cm.)
Height	44 in. (111.8 cm.)
Weight	56 lbs. (25.4 kg.)
Spill Capacity	95 gal. (359.6 L.)
Load Capacity	650 lbs. (295.8 kg.)

Regulations: UN 1H2/X295/S, DOT 49 CFR 173.3(c), EPA, SPCC and NPDES



## 103-GALLON SALVAGE DRUM



### 1040-YE

Top Diameter	31.5 in. (80 cm.)
Bottom Diameter	25.75 in. (65.5 cm.)
Height	45 in. (114.3 cm.)
Weight	49 lbs. (22.3 kg.)
Spill Capacity	103 gal. (389.9 L.)
Load Capacity	650 lbs. (295.8 kg.)

Patents US Patent No. 9,592,927  
CA Patent No. 2,699,046

Regulations: UN 1H2/X295/S, DOT 49 CFR 173.3(c), EPA, SPCC and NPDES



= Tarp available, = Lock Kit available

## 50-GALLON WHEELED SALVAGE DRUM



1259-YE	
Top Diameter	24 in. (61 cm.)
Bottom Diameter	18.5 in. (47 cm.)
Dimensions	24 in. L x 30 in. W (61 cm. L x 76 cm. W)*
Height	45.3 in. (115.1 cm.)
Weight	46.5 lbs. (21.1 kg.)
Spill Capacity	50 gal. (189.3 L.)
Load Capacity	275 lbs. (124.8 kg.)

Regulations: UN 1H2/X295/S, DOT 49 CFR 173.3(c), EPA, SPCC and NPDES

\*includes handle



## 95-GALLON WHEELED SALVAGE DRUM



1299-YE	
Top Diameter	31.3 in. (79.5 cm.)
Bottom Diameter	25.75 in. (65.5 cm.)
Dimensions	32 in. L x 36 in. W (81.3 cm. L x 91.5 cm. W)*
Height	47.5 in. (120.7 cm.)
Weight	56 lbs. (25.4 kg.)
Spill Capacity	95 gal. (359.6 L.)
Load Capacity	250 lbs. (113.4 kg.)

Patents US Patent No. 9,592,927  
CA Patent No. 2,699,046

Regulations: UN 1H2/X295/S, DOT 49 CFR 173.3(c), EPA, SPCC and NPDES

\*includes handle



## 55-GALLON LAB PACK



1255-YE	
Top Diameter	25 in. (64 cm.)
Bottom Diameter	19.5 in. (49.5 cm.)
Height	37.5 in. (95.3 cm.)
Weight	18 lbs. (8.2 kg.)
Spill Capacity	55 gal. (208.2 L.)
Load Capacity	175 lbs. (80 kg.)

Regulations: 1H2/X80/S, 1H2/Y100/S, DOT 49 CFR 173.12

## 180-GALLON POLY-OVERPACK®



1180-YE	
Top Diameter	40.25 in. (102 cm.)
Bottom Diameter	30 in. (76 cm.)
Height	57 in. (145 cm.)
Weight	102 lbs. (46.3 kg.)
Spill Capacity	180 gal. (681.4 L.)
Load Capacity	2,500 lbs. (1,134 kg.)

Regulations: EPA 40 CFR 761.65, SPCC and NPDES

## 600-GALLON POLY-OVERPACK®



1051-YE	
Top Diameter	71 in. (180.3 cm.)
Bottom Diameter	49.25 in. (125.1 cm.)
Height	69 in. (175.3 cm.)
Weight	225 lbs. (102.1 kg.)
Spill Capacity	600 gal. (2,271 L.)
Load Capacity	5,000 lbs. (2,268 kg.)

Regulations: EPA 40 CFR 761.65, SPCC and NPDES

## ▶ DID YOU KNOW?

ENPAC® drums have been used for the containment of COVID-19 and Ebola, and for cleaning up the Gulf and Valdez oil spills. These are just a few examples of how ENPAC® is the number one trusted source for salvage drums.

 = Tarp available



## 65-GALLON SPILLPACK WITH SLIP-TOP LID



### 1165-YE

Top Diameter	27.75 in. (70.5 cm.)
Bottom Diameter	23 in. (58.4 cm.)
Height	37.5 in. (95.3 cm.)
Weight	22.5 lbs. (10.2 kg.)
Spill Capacity	65 gal. (246.1 L.)

Regulations: EPA, SPCC and NPDES



## 95-GALLON SPILLPACK WITH SLIP-TOP LID



### 1195-YE

Top Diameter	31.5 in. (80 cm.)
Bottom Diameter	25.75 in. (65.5 cm.)
Height	41.5 in. (105.4 cm.)
Weight	28 lbs. (12.7 kg.)
Spill Capacity	95 gal. (359.6 L.)

Regulations: EPA, SPCC and NPDES



## 50-GALLON WHEELED SPILLPACK WITH SLIP-TOP LID



### 1159-YE

Top Diameter	24 in. (61 cm.)
Bottom Diameter	18.5 in. (47 cm.)
Dimensions	24 in. L x 29 in. W (61 cm. L x 73.7 cm. W)*
Height	45.5 in. (115.6 cm.)
Weight	40 lbs. (18.1 kg.)
Spill Capacity	50 gal. (189.3 L.)

Regulations: EPA, SPCC and NPDES

\*includes handle



## 95-GALLON WHEELED SPILLPACK WITH SLIP-TOP LID



### 1199-YE

Top Diameter	31.5 in. (80 cm.)
Bottom Diameter	25.75 in. (65.5 cm.)
Dimensions	32 in. L x 36 in. W (81.3 cm. L x 91.5 cm. W)*
Height	57.5 in. (146 cm.)
Weight	50 lbs. (22.7 kg.)
Spill Capacity	95 gal. (359.6 L.)

Regulations: EPA, SPCC and NPDES

\*includes handle



= Tarp available



## DRUM LIFTER FOR 55-GALLON DRUMS



3100-BU	
Weight	22 lbs. (10 kg.)
Load Capacity	1,000 lbs. (143.6 kg.)
Compatibility	55-gallon drums

## POLY TOPPER 55-GALLON DRUM COVER



3065-BK	
Diameter	25.5 in. (64.8 cm.)
Height	3.75 in. (9.6 cm.)
Weight	1.5 lbs. (0.7 kg.)
Compatibility	55-gallon drums

## SALVAGE DRUM DOLLY




8050	
Diameter	27.5 in. (69.9 cm.)
Height	5.5 in. (14 cm.)
Weight	19 lbs. (8.6 kg.)
Load Capacity	900 lbs. (408.2 kg.)
Compatibility	20 to 95-gallon drums, including 1040-YE

## ► REMEMBER...

All salvage drums are overpacks, but not all overpacks are salvage drums! Use salvage drums for compliant storage and transport.





A photograph showing a forklift operator in a light blue shirt and dark pants driving a black forklift. The forklift is carrying a spill pallet on its forks. The spill pallet is black and holds a large white IBC tote. The background shows a wooded area with trees and a clear blue sky. The image is overlaid with a green diagonal graphic on the left side.

Durable, chemically-resistant and environmentally-responsible, spill pallets are engineered to provide exceptional protection against spills and leakage in a compact footprint.

# SPILL PALLETS



# ► SPILL PALLETS

## WHAT IS A SPILL PALLET AND WHY DO YOU NEED IT?

A spill pallet is a secondary containment system designed to store various containers, while catching potential leaks and spills that may contaminate the immediate area. They play an essential role in preventing spills, safeguarding the environment, and protecting workers from hazardous chemicals.

ENPAC® offers many different styles of spill pallets based on the application, type of container, and regulatory requirement. Versions are available to meet all EPA regulations for hazardous materials, as well as low-profile options that meet OSHA regulations for drips and leaks.

## LOAD TESTING

ENPAC®'s spill pallets are used around the world in a myriad of environments. From the frozen oil

patches of Alaska to the scorching deserts of the Middle East, plastic products are expected to perform. Large containers like 55-gallon drums and IBC totes can be heavy, therefore, load capacity is a crucial feature of a spill pallet's quality.

To ensure performance in extreme temperatures, ENPAC® has implemented load testing in an insulated "hot box". The hot box mimics real world usage by subjecting loaded products to high heat for an extended time period. This ensures ENPAC® products can withstand heavy loads in the most extreme temperatures of the world.

All of ENPAC®'s Spill Pallets are tested and certified through the "hot box" at ENPAC®'s headquarters in Cleveland, OH. Next time you see an ENPAC® spill containment unit sitting in the sun, you can rest easy knowing that the plastic can take the heat!





## HOW MUCH CONTAINMENT DO YOU NEED?

The regulation: EPA 40 CFR 254.175 Containment:  
Ref (b) (3) The containment system must have sufficient capacity to contain 10% of the volume of container or the volume of the largest container, whichever is greater.

Example: How much containment do you need to store **four 55-gallon drums?**

### 10% of the Volume of All Containers:

$4 \text{ (Drums)} \times 55 \text{ (Gallons Per Drum)} = 220 \text{ gallons}$   
 $220 \text{ gallons} \times 0.1 \text{ (10\%)} = 22 \text{ gallons}$

OR

### 100% of the Largest Container:

Volume of One 55-gallon Drum = 55 gallons

**FINAL ANSWER:** Since 55 gallons is greater than 22 gallons,  
**55 gallons of secondary containment** are required in order to be compliant.

## REGULATIONS

### EPA 40 CFR 264.175 (b)(3) Containment

The containment system must have sufficient capacity to contain 10% of the volume of containers or the volume of the largest container, whichever is greater.

### EPA 40 CFR 112 Spill Prevention, Control and Containment (SPCC)


Summary: The SPCC regulation aims to prevent oil discharges into navigable waters and related areas, rather than cleanup after a spill has occurred. The regulation generally affects ALL facilities with at least 1,320 gallons above ground storage capacity, or 42,000+ gallons underground storage capacity. Affected facilities are required to prepare and file an action plan (the SPCC Plan), which includes spill prevention measures and controls, such as spill pallets. More information is available at [www.epa.gov/oilspill](http://www.epa.gov/oilspill).



# ▶ 4 DRUM SLIM-LINE SPILL PALLET

## New Design!

The Slim-Line Poly Spill Pallet has been the most popular 4 drum spill containment pallet since its introduction, effectively containing spills from 55-gallon drums for several decades. It is durable, practical and weather-resistant - having been tested to withstand the world's harshest environments. Whether it's used in industrial settings or storage facilities, this spill pallet ensures safety and environmental protection.

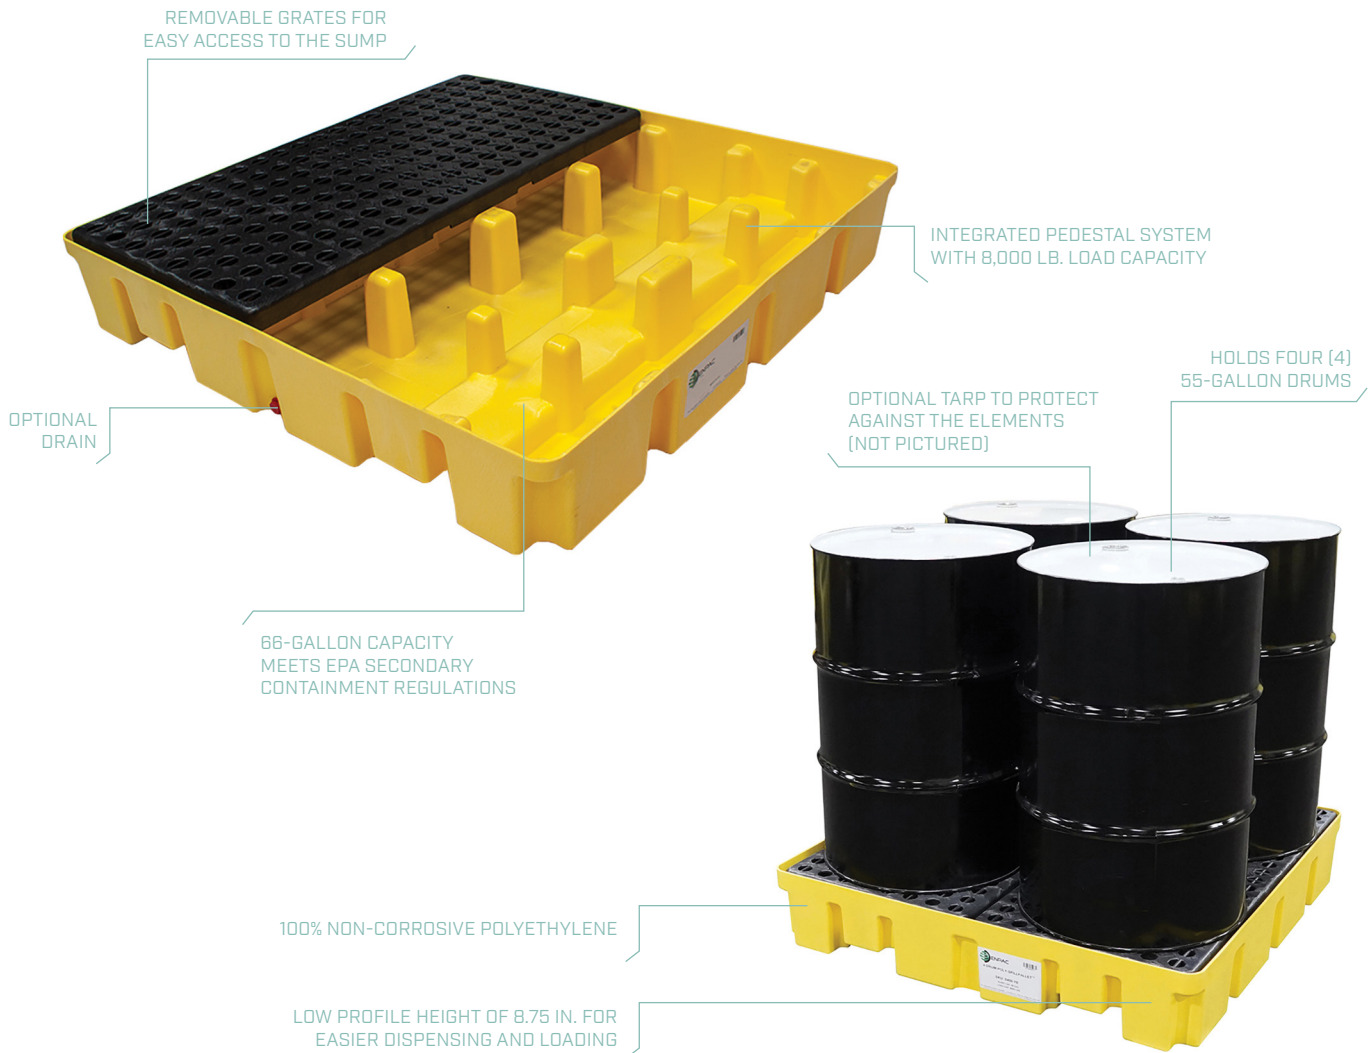



## 4 DRUM SLIM-LINE SPILL PALLET



### 5400-BD + 5400-YE

Dimensions 49 in. x 49 in. x 8.75 in.  
(124.5 cm. x 124.5 cm. x 22.3 cm.)

Weight 5400-YE: 80 lbs. (36 kg.)  
5400-BD: 72 lbs. (33 kg.)

Spill Capacity 66 gal. (249.8 L.)

Load Capacity 5400-YE: 8,000 lbs. (3,628.8 kg.)  
5400-BD: 4,000 lbs. (1,814.4 kg.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



Disclaimer: The load capacity is based on a Uniformly Distributed Load (UDL).

= Replaceable grate available = Tarp available = Drain available = Black Diamond



## 2 DRUM NESTABLE SPILL PALLET



### 5222-YE + 5222-BD

Dimensions	51 in. x 25.75 in. x 21.5 in. (129.5 cm. x 65.5 cm. x 54.6 cm.)
Weight	5222-YE: 54 lbs. (25 kg.) 5222-BD: 48 lbs. (21.8 kg.)
Spill Capacity	66 gal. (249.8 L.)
Load Capacity	5222-YE: 2,000 lbs. (907.2 kg.) 5222-BD: 1,000 lbs. (453.6 kg.)
Patents	US Patent No. 10,065,765; Canada Patent No. 2,894,711



Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## 2 DRUM SPILL PALLET

### 5253-YE

Dimensions	53.5 in. x 29 in. x 17 in. (135.9 cm. x 73.7 cm. x 43.2 cm.)
Weight	58 lbs. (27 kg.)
Spill Capacity	58 gal. (219.6 L.)
Load Capacity	2,000 lbs. (907.2 kg.)
Optional Ramp with Extender	5039-BK, 5038-BK

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## 4 DRUM IN-LINE SPILL PALLET

### 5102-YE

Dimensions	98.25 in. x 25.25 in. x 11.5 in. (249.6 cm. x 64.2 cm. x 29.2 cm.)
Weight	79 lbs. (36 kg.)
Spill Capacity	66 gal. (249.8 L.)
Load Capacity	3,000 lbs. (1,360.8 kg.)
Optional Ramp	5039-BK

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## 4 DRUM XL SPILL PALLET

### 5001-YE

Dimensions	50 in. x 50 in. x 17 in. (127 cm. x 127 cm. x 43.2 cm.)
Weight	85 lbs. (39 kg.)
Spill Capacity	81 gal. (306 L.)
Load Capacity	6,000 lbs. (2,721.6 kg.)
Optional Ramp with Extender	5039-BK, 5038-BK

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## ▶ DID YOU KNOW?

ENPAC's pallets meet EPA 29 CFR 1910.22 which states every workroom floor shall be maintained in a clean and as much as possible, dry condition.


Disclaimer: The load capacity is based on a Uniformly Distributed Load (UDL).

= Replaceable grate available = Tarp available = Drain available = Black Diamond

# ▶ WORKSTATIONS

## Product Design Allows for a Customizable Workspace!

ENPAC®'s workstations are modular, low-profile spill containment pallets that can be used individually or connected to customize a workspace to any situation. The low-profile plastic construction facilitates easy loading and safe storage of your containers. All models feature a removable grate that easily allows access to the sump for clean-up.

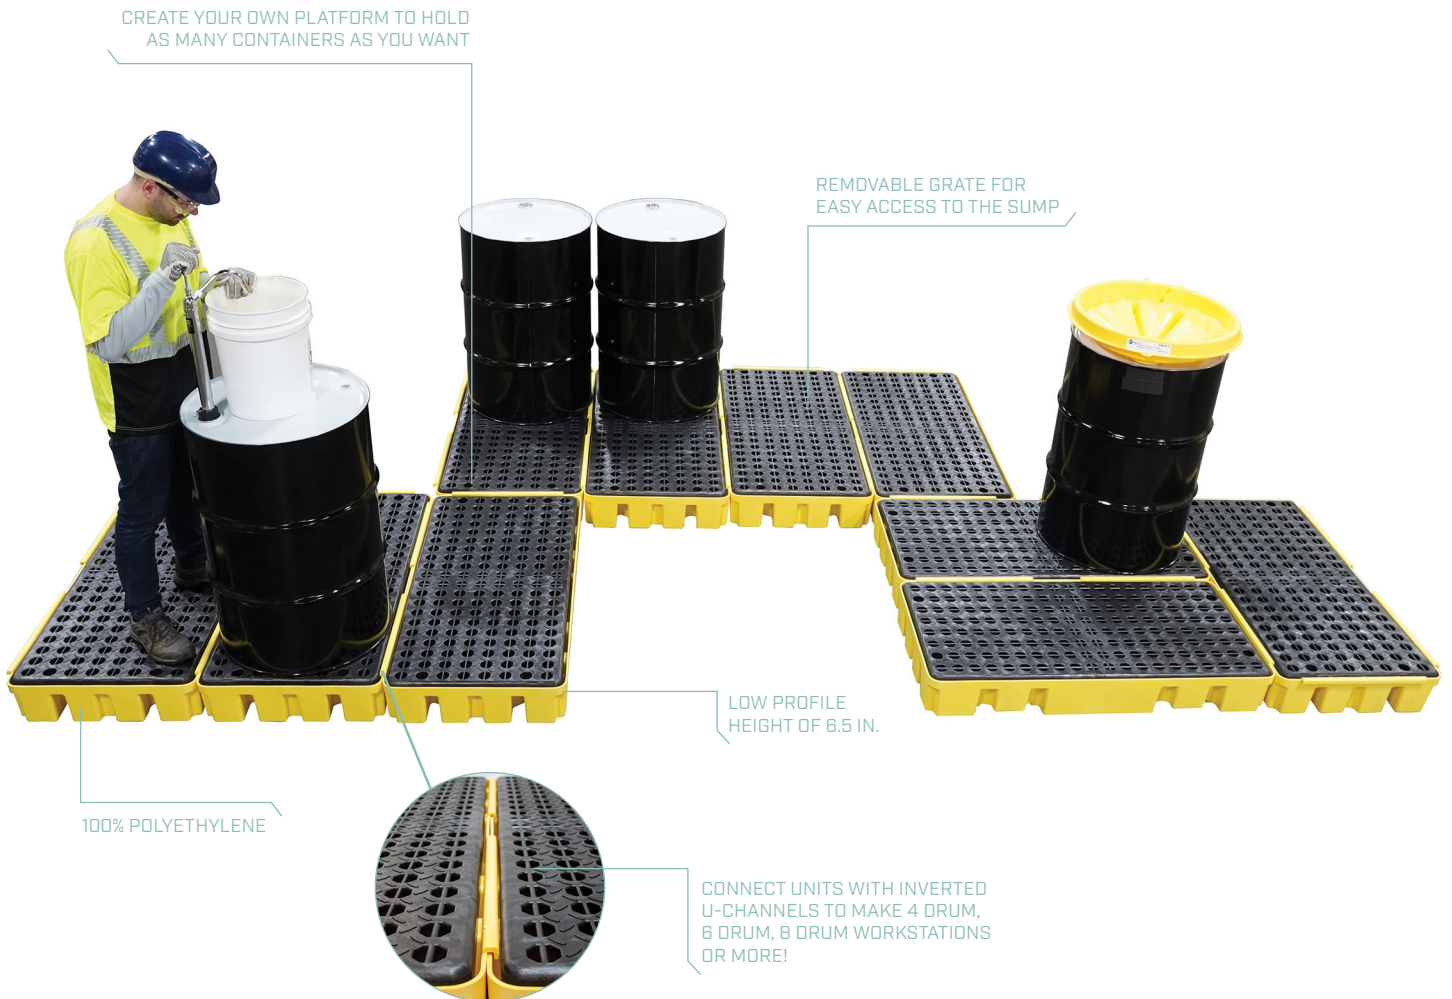

CREATE YOUR OWN PLATFORM TO HOLD AS MANY CONTAINERS AS YOU WANT

REMOVABLE GRATE FOR EASY ACCESS TO THE SUMP

LOW PROFILE HEIGHT OF 6.5 IN.

100% POLYETHYLENE

CONNECT UNITS WITH INVERTED U-CHANNELS TO MAKE 4 DRUM, 6 DRUM, 8 DRUM WORKSTATIONS OR MORE!

## 2 DRUM WORKSTATION



### 5117-YE + 5117-BD

Dimensions	49 in. x 24 in. x 6.5 in. (124.5 cm. x 61 cm. x 16.5 cm.)
Weight	38 lbs. (17.2 kg.)
Spill Capacity	25.5 gal. (96.6 L.)
Load Capacity	5117-YE: 4,000 lbs. (1,814.4 kg.) 5117-BD: 3,000 lbs. (1,360.8 kg.)

Regulations: EPA, SPCC and NPDES



## 4 DRUM WORKSTATION



### 5116-YE + 5116-BD

Dimensions	49 in. x 48 in. x 6.5 in. (124.5 cm. x 121.9 cm. x 16.5 cm.)
Weight	76 lbs. (34.5 kg.)
Spill Capacity	51 gal. (193.1 L.)
Load Capacity	5116-YE: 8,000 lbs. (3,628.8 kg.) 5116-BD: 6,000 lbs. (2,721.6 kg.)

Regulations: EPA, SPCC and NPDES



## 6 DRUM WORKSTATION



### 5115-YE + 5115-BD

Dimensions	49 in. x 72 in. x 6.5 in. (124.5 cm. x 182.9 cm. x 16.5 cm.)
Weight	114 lbs. (51.8 kg.)
Spill Capacity	76.5 gal. (289.6 L.)
Load Capacity	5115-YE: 12,000 lbs. (5,443.1 kg.) 5115-BD: 9,000 lbs. (4,082.3 kg.)

Regulations: EPA, SPCC and NPDES



## 8 DRUM WORKSTATION



### 5110-YE + 5110-BD

Dimensions	49 in. x 96 in. x 6.5 in. (124.5 cm. x 243.8 cm. x 16.5 cm.)
Weight	152 lbs. (69 kg.)
Spill Capacity	102 gal. (386.1 L.)
Load Capacity	5110-YE: 16,000 lbs. (7,257.5 kg.) 5110-BD: 12,000 lbs. (5,443.1 kg.)

Regulations: EPA, SPCC and NPDES



Disclaimer: The load capacity is based on a Uniformly Distributed Load (UDL).

= Replaceable grate available = Tarp available = Black Diamond



## 1 DRUM SPILLPAL



### 5750-YE + 5750-YE-G\*

Dimensions	2 ft. x 2 ft. x 3 in. (0.6 m. x 0.6 m. x 7.6 cm.)
Weight	5750-YE: 3 lbs. (1.4 kg.) 5750-YE-G: 12 lbs. (5.4 kg.)
Spill Capacity	5750-YE: 8 gal. (30.3 L.) 5750-YE-G: 6 gal. (22.7 L.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



\*Includes grate

## 2 DRUM SPILLPAL



### 5755-YE + 5755-YE-G\*

Dimensions	2 ft. x 4 ft. x 3 in. (0.6 m. x 1.2 m. x 7.6 cm.)
Weight	5755-YE: 6 lbs. (2.7 kg.) 5755-YE-G: 24 lbs. (10.8 kg.)
Spill Capacity	5755-YE: 15 gal. (56.8 L.) 5755-YE-G: 12 gal. (45.4 L.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



\*Includes grate

## 4 DRUM SPILLPAL



### 5760-YE + 5760-YE-G\*

Dimensions	4 ft. x 4 ft. x 3 in. (1.2 m. x 1.2 m. x 7.6 cm.)
Weight	5760-YE: 8 lbs. (3.6 kg.) 5760-YE-G: 45 lbs. (20 kg.)
Spill Capacity	5760-YE: 30 gal. (113.6 L.) 5760-YE-G: 24 gal. (90.9 L.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



\*Includes grate



Disclaimer: The load capacity is based on a Uniformly Distributed Load (UDL).

= Replaceable grate available

## 4 DRUM IN-LINE SPILLPAL



### 5765-YE + 5765-YE-G\*

Dimensions 2 ft. x 8 ft. x 3 in.  
(0.6 m. x 2.4 m. x 7.6 cm.)

Weight 5765-YE: 9 lbs. (4.1 kg.)  
5765-YE-G: 46 lbs. (21 kg.)

Spill Capacity 5765-YE: 30 gal. (113.6 L.)  
5765-YE-G: 24 gal. (90.9 L.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



\*Includes grate

## 6 DRUM SPILLPAL



### 5770-YE + 5770-YE-G\*

Dimensions 4 ft. x 6 ft. x 3 in.  
(1.2 m. x 1.8 m. x 7.6 cm.)

Weight 5770-YE: 11 lbs. (5 kg.)  
5770-YE-G: 63 lbs. (28 kg.)

Spill Capacity 5770-YE: 45 gal. (170.3 L.)  
5770-YE-G: 36 gal. (136.3 L.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



\*Includes grate

## 8 DRUM SPILLPAL



### 5775-YE + 5775-YE-G\*

Dimensions 4 ft. x 8 ft. x 3 in.  
(1.2 m. x 2.4 m. x 7.6 cm.)

Weight 5775-YE: 12 lbs. (5.4 kg.)  
5775-YE-G: 82 lbs. (37 kg.)

Spill Capacity 5775-YE: 60 gal. (227.1 L.)  
5775-YE-G: 48 gal. (181.7 L.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



\*Includes grate



= Replaceable grate available

# ▶ ROLL-TOP HARDCOVER SPILL PALLET

Ideal Solution for Indoor and Outdoor Drum Storage!

The convenience of outdoor storage meets the reliability of ENPAC® spill containment with the roll-top spill containment drum shed. These hardcovers are made with tough material that is weatherproof for the world's harshest conditions and lock for added security for peace of mind.





## 2 DRUM ROLL-TOP HARDCOVER

### 4062-YE

Dimensions	60 in. x 37.25 in. x 72.75 in. (152.4 cm. x 94.6 cm. x 184.8 cm.)
Weight	194 lbs. (88 kg.)
Spill Capacity	58 gal. (219.6 L.)
Load Capacity	2,000 lbs. (907.2 kg.)
Optional Ramp with Extender	5039-BK, 5038-BK

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## 2 DRUM ROLL-TOP HARDCOVER

### 4062-BD

Dimensions	60 in. x 37.25 in. x 72.75 in. (152.4 cm. x 94.6 cm. x 184.8 cm.)
Weight	180 lbs. (81.7 kg.)
Spill Capacity	58 gal. (219.6 L.)
Load Capacity	1,000 lbs. (453.6 kg.)
Optional Ramp with Extender	5039-BD, 5038-BD

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## 4 DRUM ROLL-TOP HARDCOVER

### 4064-YE

Dimensions	65 in. x 58 in. x 69 in. (165.1 cm. x 147.3 cm. x 175.3 cm.)
Weight	225 lbs. (102.1 kg.)
Spill Capacity	66 gal. (249.8 L.)
Load Capacity	6,000 lbs. (2,721.6 kg.)
Optional Ramp	5039-BK

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## 4 DRUM ROLL-TOP HARDCOVER

### 4064-BD

Dimensions	65 in. x 58 in. x 69 in. (165.1 cm. x 147.3 cm. x 175.3 cm.)
Weight	225 lbs. (102.1 kg.)
Spill Capacity	66 gal. (249.8 L.)
Load Capacity	6,000 lbs. (2,721.6 kg.)
Optional Ramp	5039-BD

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



Disclaimer: The load capacity is based on a Uniformly Distributed Load (UDL).

= Replaceable grate available = Drain available = Black Diamond

## HAZARD HUT® DRUM SHED

### 4000-YE

Dimensions	68 in. x 64 in. x 71 in. (172.7 cm. x 162.6 cm. x 180.3 cm.)
Weight	250 lbs. (114 kg.)
Spill Capacity	72 gal. (272.6 L.)
Load Capacity	4,000 lbs. (1,814.4 kg.)
Optional Ramp	4001-BK (pictured below)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## JOB HUT DRUM SHED

### 4010-YE

Dimensions	85.5 in. x 61.5 in. x 94 in. (217.2 cm. x 156.2 cm. x 238.8 cm.)
Weight	452 lbs. (205 kg.)
Spill Capacity	72 gal. (272.6 L.)
Load Capacity	8,000 lbs. (3,628.8 kg.)
Optional Ramp	5111-BK (pictured below)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## SPILL PALLET REPLACEMENT GRATE

### 7006-BK

Dimensions	48 in. x 23 in. x 1.75 in. (121.9 cm. x 58.4 cm. x 4.5 cm.)
Weight	17.5 lbs. (7.9 kg.)



## SPILL PALLET REPLACEMENT ½ GRATE

### 7007-BK

Dimensions	24 in. x 23 in. x 1.75 in. (61 cm. x 58.4 cm. x 4.5 cm.)
Weight	9 lbs. (4.1 kg.)



Disclaimer: The load capacity is based on a Uniformly Distributed Load (UDL).

= Replaceable grate available



## 1 DRUM UTILITY TRAY

5141-BD	
Dimensions	30.5 in. x 29.5 in. x 6 in. (77.5 cm. x 74.9 cm. x 15.2 cm.)
Weight	4 lbs. (1.8 kg.)
Spill Capacity	17 gal. (64.4 L.)
Patents	US Patent No. 9,896,244 B2

Regulations: EPA, SPCC and NPDES



## 2 DRUM UTILITY TRAY

5142-BD	
Dimensions	30.5 in. x 57 in. x 6 in. (77.5 cm. x 144.8 cm. x 15.2 cm.)
Weight	13 lbs. (5.8 kg.)
Spill Capacity	33 gal. (124.9 L.)
Patents	US Patent No. 9,896,244 B2

Regulations: EPA, SPCC and NPDES



## POLY LAB TRAY

5248-YE	
Dimensions	25.5 in. x 22 in. x 3.25 in. (64.8 cm. x 55.9 cm. x 8.3 cm.)
Weight	4 lbs. (1.8 kg.)
Spill Capacity	2.5 gal. (9.5 L.)
Load Capacity	40 lbs. (18.1 kg.)

Regulations: EPA, SPCC and NPDES



▶ ENPAC®'s utility trays can connect together! Their inverted u-channels allow for a customized workspace.



## DRUMS UP JR. CONTAINMENT TRAY

8200-YE	
Dimensions	22.75 in. x 17.25 in. x 7.5 in. (57.8 cm. x 43.8 cm. x 19.1 cm.)
Weight	2 lbs. (0.9 kg.)
Spill Capacity	7.5 gal. (28.4 L.)

Regulations: EPA, SPCC and NPDES



## DRUMS UP CONTAINMENT TRAY

8091-YE	
Dimensions	36 in. x 36 in. x 8 in. (91.4 cm. x 91.4 cm. x 20.3 cm.)
Weight	6 lbs. (2.7 kg.)
Spill Capacity	20 gal. (75.7 L.)

Regulations: EPA, SPCC and NPDES



 = Black Diamond

## 2 DRUM CROSS-CONTAIN SPILL PALLET

### 5393-BK

Dimensions	58 in. x 34.5 in. x 12 in. (147.3 cm. x 87.6 cm. x 30.5 cm.)
Weight	29 lbs. (13 kg.)
Spill Capacity	66 gal. (249.8 L.)
Load Capacity	2,000 lbs. (907.2 kg.)
Sump Only	5393-BK-SUMP

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## 4 DRUM CROSS-CONTAIN SPILL PALLET

### 5394-BK

Dimensions	56 in. x 56 in. x 10 in. (142.2 cm. x 142.2 cm. x 25.4 cm.)
Weight	47 lbs. (21 kg.)
Spill Capacity	75 gal. (283 L.)
Load Capacity	4,000 lbs. (1,814.4 kg.)
Sump Only	5394-BK-SUMP

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## IBC TOTE CROSS-CONTAIN SPILL PALLET, SUMP ONLY

### 5390-BK

Dimensions	79 in. x 78 in. x 20 in. (200.7 cm. x 198.1 cm. x 50.8 cm.)
Weight	84 lbs. (34 kg.)
Spill Capacity	385 gal. (1,457.4 L.)



▶ IN CASE YOU  
**DIDN'T KNOW...**

ENPAC®'s spill trays are made of 100% recycled polyethylene!

## 2 DRUM ECONO SPILL TRAY

### 5002-BK

Dimensions	45 in. x 35 in. x 5 in. (114.3 cm. x 88.9 cm. x 12.7 cm.)
Weight	14 lbs. (6.3 kg.)
Spill Capacity	21.5 gal. (81.4 L.)

Regulations: EPA, SPCC and NPDES



## 4 DRUM ECONO SPILL TRAY

### 5004-BK

Dimensions	51 in. x 47 in. x 5 in. (129.5 cm. x 119.4 cm. x 12.7 cm.)
Weight	19 lbs. (8.6 kg.)
Spill Capacity	36 gal. (136.3 L.)


Regulations: EPA, SPCC and NPDES



# ▶ IBC TOTE SPILL PALLET 2000i

## Industry Leading IBC Tote Pallet

With a range of standard features designed to improve workflow while still providing containment, this IBC spill containment pallet is the industry leading tote pallet. It includes enhanced features to catch spills or leaks, and allows for easy dispensing and clean up.

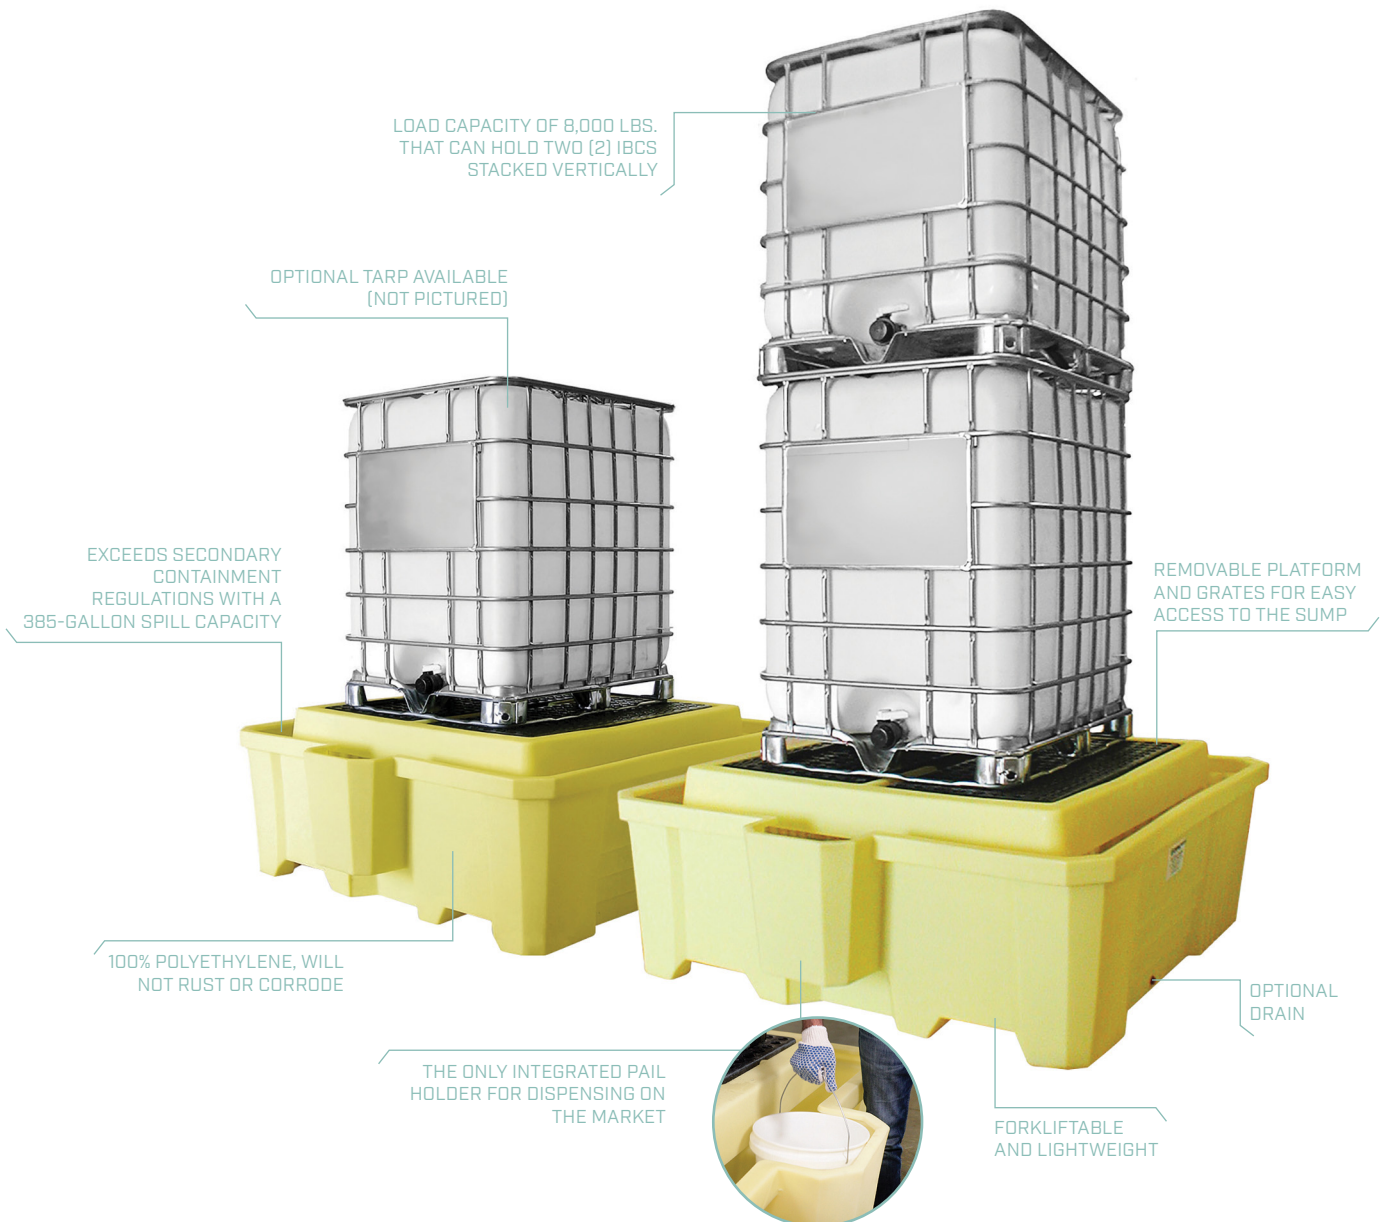

LOAD CAPACITY OF 8,000 LBS.  
THAT CAN HOLD TWO (2) IBCS  
STACKED VERTICALLY

OPTIONAL TARP AVAILABLE  
(NOT PICTURED)

EXCEEDS SECONDARY  
CONTAINMENT  
REGULATIONS WITH A  
385-GALLON SPILL CAPACITY

100% POLYETHYLENE, WILL  
NOT RUST OR CORRODE

THE ONLY INTEGRATED PAIL  
HOLDER FOR DISPENSING ON  
THE MARKET

REMOVABLE PLATFORM  
AND GRATES FOR EASY  
ACCESS TO THE SUMP

OPTIONAL  
DRAIN

FORKLIFTABLE  
AND LIGHTWEIGHT



## IBC TOTE SPILL PALLET 2000i



### 5469-YE + 5469-BD

Dimensions 81 in. x 72.5 in. x 29 in.  
[205.7 cm. x 184.2 cm. x 73.7 cm.]

Weight 5469-YE: 270 lbs. [122.5 kg.]  
5469-BD: 176 lbs. [79.8 cm.]

Spill Capacity 385 gal. [1,457.4 L.]

Load Capacity 5469-YE: 8,000 lbs. [3,628.8 kg.]  
5469-BD: 3,000 lbs. [1,360.8 kg.]

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## IBC TOTE SPACE-SAVER SPILL PALLET

### 5460-YE

Dimensions 65 in. x 65 in. x 37 in. [165.1 cm. x 165.1 cm. x 94 cm.]

Weight 278 lbs. [126 kg.]

Spill Capacity 369 gal. [1,396 L.]

Load Capacity 7,000 lbs [3,175 kg.]

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## ▶ DID YOU KNOW?

ENPAC®'s IBC Tote Spill Pallet 2000i is nestable to save space while reducing shipping and storage costs.

## DOUBLE IBC TOTE LOW-TOP SPILL PALLET

### 5482-YE


Dimensions 110 in. x 55 in. x 20 in. [279.4 cm. x 139.7 cm. x 50.8 cm.]

Weight 254 lbs. [115.2 kg.]

Spill Capacity 385 gal. [1,457.4 L.]

Load Capacity 8,000 lbs. [3,628.8 kg.]

Regulations: EPA 40 CFR 264.175, SPCC, NPDES

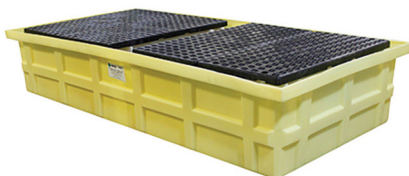

## DOUBLE IBC TOTE SPILL PALLET XL

### 5480-YE

Dimensions 113 in. x 71 in. x 32 in. [287 cm. x 180.3 cm. x 81.3 cm.]

Weight 365 lbs. [165.6 kg.]

Spill Capacity 750 gal. [2,839.1 L.]

Load Capacity 8,000 lbs. [3,628.8 kg.]

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



Disclaimer: The load capacity is based on a Uniformly Distributed Load (UDL).

= Replaceable grate available = Tarp available = Drain available = Black Diamond

## IBC BERM



\*L-bracket stays can be positioned inwards or outwards. The above image displays both positions for reference only.

### 48-452-YE-SS

Dimensions	4 ft. x 5 ft. x 2 ft. (1.2 m. x 1.5 m. x 0.6 m.)
Weight	84 lbs. (38.1 kg.)
Spill Capacity	229 gal. (1,131.8 L)

### 48-552-YE-SS

Dimensions	5 ft. x 5 ft. x 2 ft. (1.5 m. x 1.5 m. x 0.6 m.)
Weight	102 lbs. (46.3 kg.)
Spill Capacity	374 gal. (1,415.7 L)

### 48-462-YE-SS

Dimensions	4 ft. x 6 ft. x 2 ft. (1.2 m. x 1.8 m. x 0.6 m.)
Weight	89 lbs. (49.4 kg.)
Spill Capacity	359 gal. (1,359 L.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES

## STEEL IBC TOTE SPILL PALLET

### 9469-BD

Dimensions	72 in. x 53 in. x 28 in. (182.9 cm. x 134.6 cm. x 71.1 cm.)
Weight	620 lbs. (281.3 kg.)
Spill Capacity	385 gal. (1,457.4 L.)
Load Capacity	5,000 lbs. (2,268 kg.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## STEEL DOUBLE IBC TOTE SPILL PALLET

### 9480-BD

Dimensions	120 in. x 53 in. x 26 in. (304.8 cm. x 134.6 cm x 66 cm.)
Weight	1,020 lbs. (462.7 kg.)
Spill Capacity	385 gal. (1,457.4 L.)
Load Capacity	10,000 lbs. (4,535.9 kg.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES




 = Black Diamond

Disclaimer: The load capacity is based on a Uniformly Distributed Load (UDL).

# ▶ IBC ROLL TOP HARDCOVER SPILL PALLET

The convenience of outdoor storage meets the reliability of ENPAC® spill containment with the IBC Roll Top Hardcover. Lockable rolling doors provide access to IBCs from either side of the unit while offering additional security. Designed with a fully compliant IBC spill pallet base enclosed by a rugged, weather resistant shell for full protection. The IBC Hardcover features the most efficient packaging in the industry, reducing landed costs.

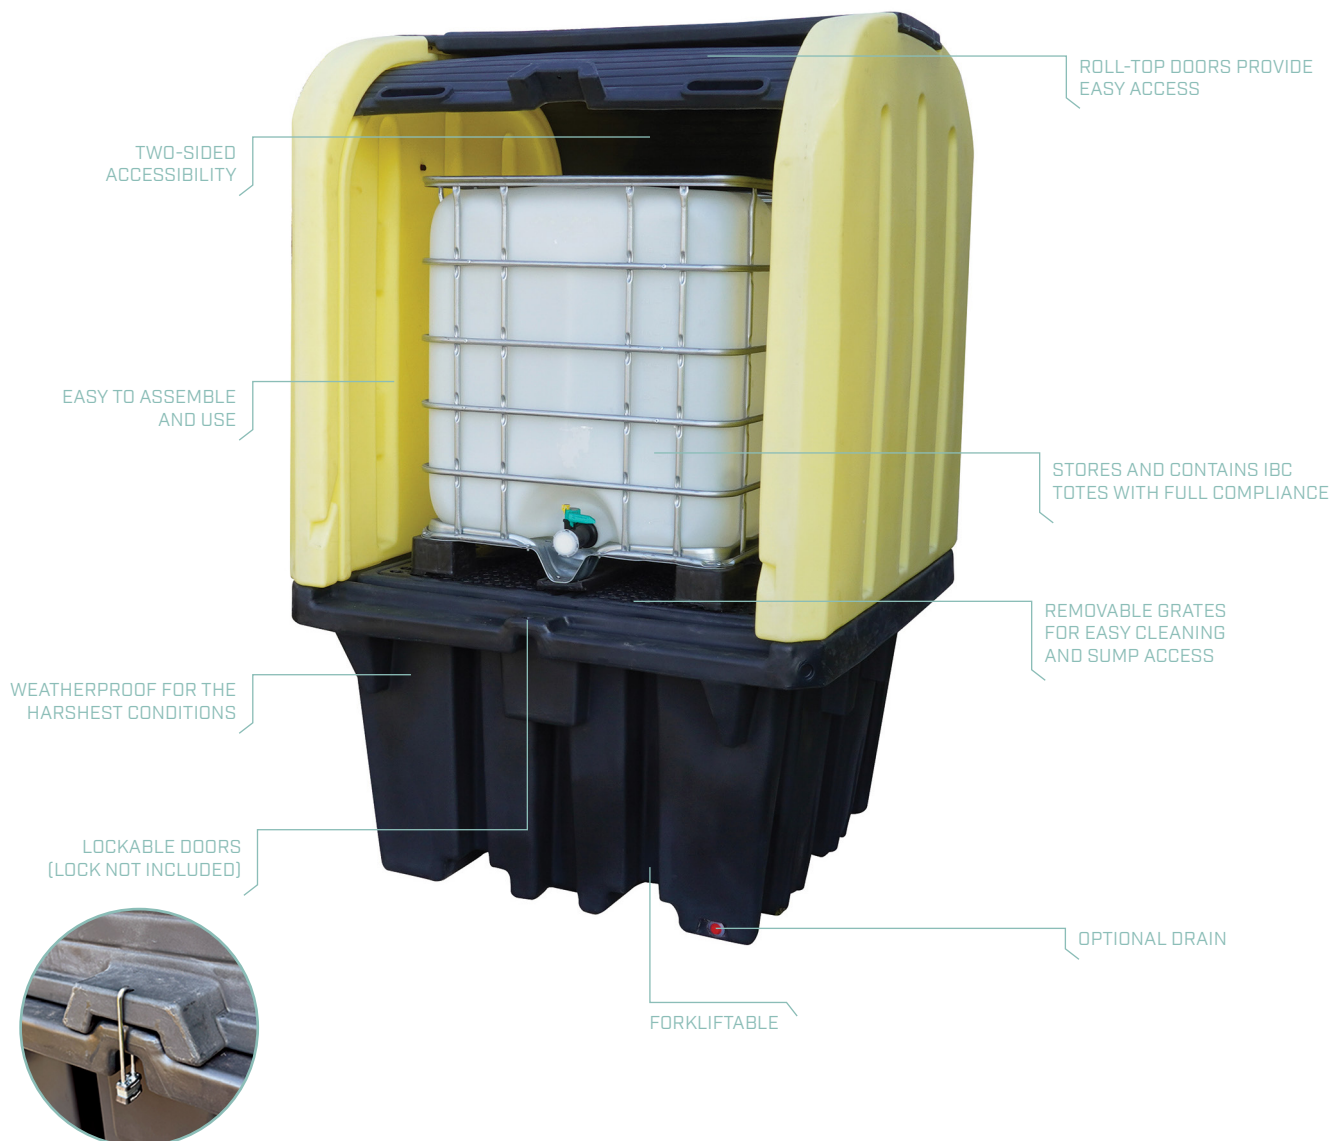



## IBC ROLL TOP HARDCOVER SPILL PALLET




### 4070-YE

Dimensions	65 in. x 65 in. x 101 in. (165 cm. x 165 cm. x 256 cm.)
Weight	325 lbs. (148 kg.)
Spill Capacity	369 gal. (1,396 L.)
Load Capacity	5,000 lbs. (2,268 kg.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



 = Drain available







# ► STORAGE & DISPENSING

ENPAC® offers a wide range of products to ensure compliance while dispensing:

- **Mobile Containment:** Consider the Poly-Dolly® (5300-YE) mobilizing drums to easily dispense in various areas of your facilities. (Page 36)
- **Racking and Stacking Systems:** Conveniently store, stack, and dispense multiple 30-gallon or 55-gallon drums at a time with the racking and stacking systems. (Pages 37-39)
- **Safety Packs:** Store and dispense drums outside with these safety packs. (Page 40)
- **Tank Containment Sumps:** Avoid hazardous and costly spills without impeding access to fuel tanks with the Poly Tank Containment units. (Page 41)
- **Totes:** Totes are ideal for storage of absorbents and spill kits. (Pages 42-43)
- **Poly Collectors:** Poly Spill Collector Systems are all-in-one mobile waste collection units that provide complete containment for a 55-gallon drum. (Page 44)
- **Funnels:** Quickly create a collecting or disposal station with these lightweight yet durable drum and pail funnels. (Page 45)
- **Additional Options** (Page 46):
  - Poly Edge Truck Mount - when quick storage and access to essentials is needed on the road.
  - Q-VAC™ vacuum - easily cleans up any liquid spills.
  - Flexible Rack Sump Inserts - secondary containment under pallet racks.
- **Steel Buildings:** Need to store hazardous chemicals? ENPAC® offers compliant steel buildings for IBC Totes, drums, and more, to safely store those chemicals! (Page 47)






# ▶ POLY-DOLLY®

The original Poly-Dolly® set the industry standard for a mobile dispensing station.

This drum dolly has highly engineered features designed to transport 55-gallon drums with ease and become a self-dispensing station. Its ergonomic design has an enclosed sump that still allows for transportation of the leaky drum.

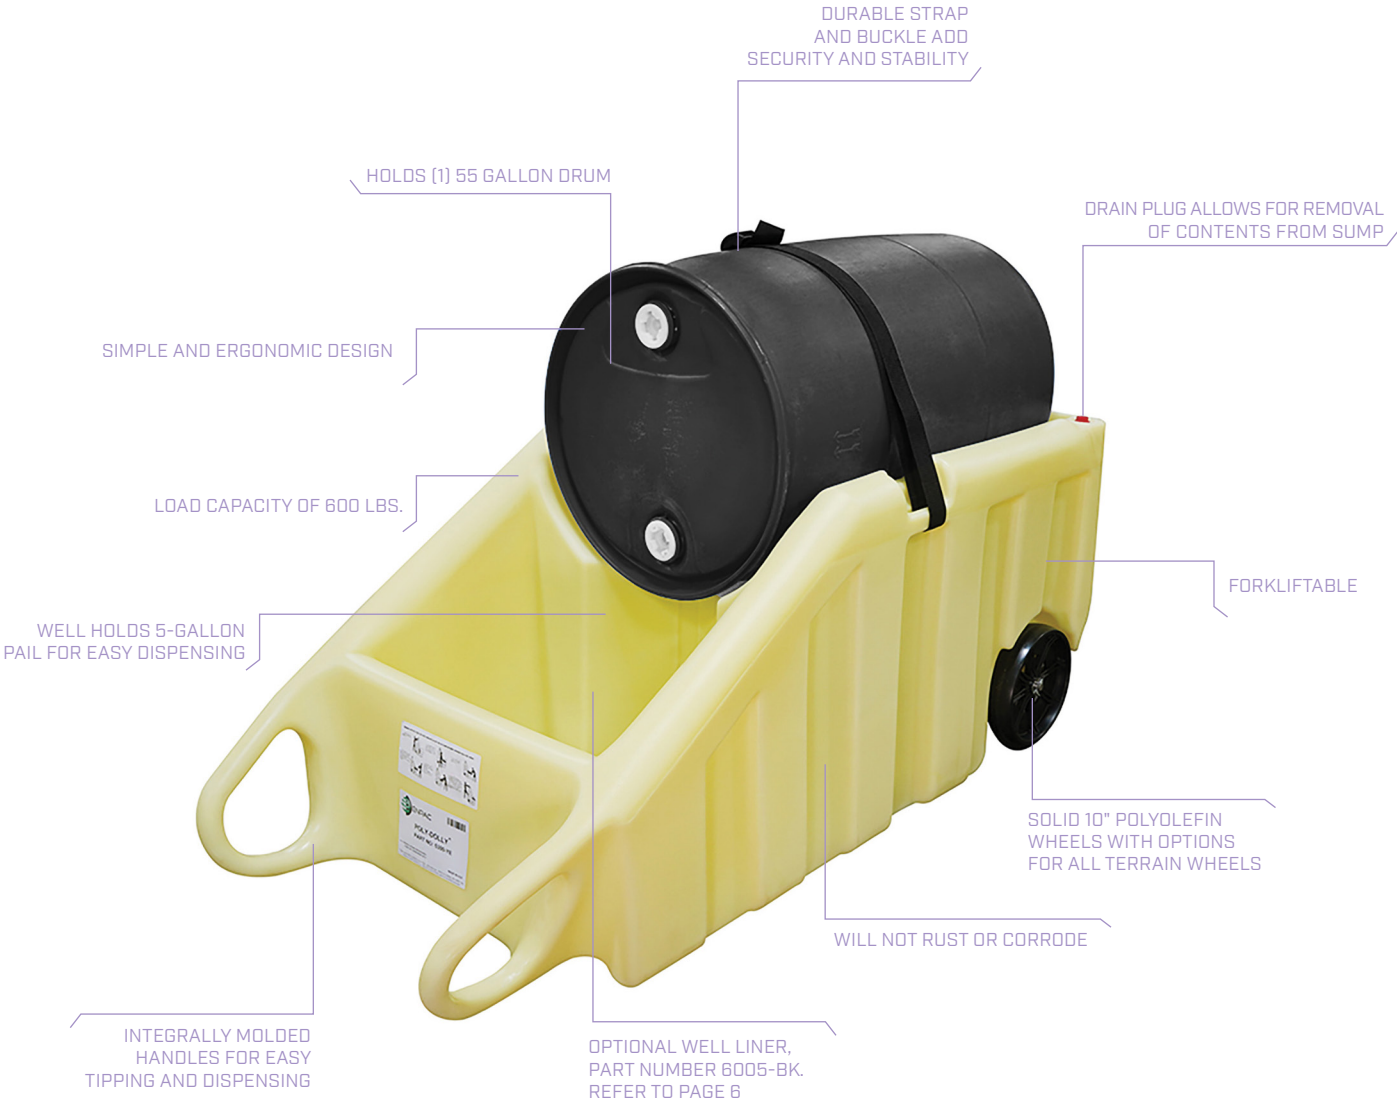



## 2 DRUM SPILL CART

### 5200-YE

Dimensions	65 in. x 29 in. x 44 in. (165.1 cm. x 73.7 cm. x 111.8 cm.)
Weight	115 lbs. (52.2 kg.)
Spill Capacity	57 gal. (215.8 L.)
Load Capacity	500 lbs. (226.8 kg.)
All-Terrain	5200-YE-A

Regulations: EEPA 40 CFR 264.175, SPCC, NPDES



## POLY-DOLLY®

### 5300-YE

Dimensions	68 in. x 31.5 in. x 27 in. (172.7 cm. x 80 cm. x 68.6 cm.)
Weight	92 lbs. (41.7 kg.)
Spill Capacity	70 gal. (265 L.)
Load Capacity	600 lbs. (272.2 kg.)
All-Terrain	5300-YE-A

### UNIVERSAL WELL LINER

Product Number	6005-BK
Dimensions	175 in. x 14.5 in. x 2.5 in. (44.5 cm. x 36.8 cm. x 6.4 cm.)
Weight	1.25 lbs. (0.6 kg.)
Spill Capacity	0.4 gal. (1.5 L.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## SPILL SCOOTER

### 5205-YE

Dimensions	35 in. x 35 in. x 8.75 in. (88.9 cm. x 88.9 cm. x 22.3 cm.)
Weight	22 lbs. (10 kg.)
Spill Capacity	11 gal. (41.6 L.)
Load Capacity	500 lbs. (226.8 kg.)

### SPILL SCOOTER HANDLE

Product Number	5206-BK*
Dimensions	36.5 in. x 10 in. (92.7 cm. x 25.4 cm.)
Weight	4 lbs. (1.8 kg.)

\*Scooter and Handle sold separately

= Tarp available, = Replaceable Grate available

## SINGLE POLY-RACKER

### 6006-YE

Dimensions 53 in. x 31 in. x 33.25 in. (134.6 cm. x 78.7 cm. x 84.5 cm.)

Weight 95.5 lbs. (43.3 kg.)

Spill Capacity 66 gal. (249.8 L.)

Load Capacity 1,600 lbs. (725.7 kg.)

Regulations: 40 CFR 264.175, SPCC, NPDES



## SINGLE POLY-STACKER

### 6007-YE

Dimensions 40.75 in. x 31 in. x 20 in. (103.6 cm. x 78.7 cm. x 50.8 cm.)

Weight 45 lbs. (20.4 kg.)

Load Capacity 800 lbs. (362.9 kg.)



## DISPENSING SHELF

### 6003-YE

Dimensions 17 in. x 22 in. x 17.5 in. (43.2 cm. x 55.9 cm. x 44.5 cm.)

Weight 8 lbs. (3.6 kg.)

Load Capacity 60 lbs. (27.2 kg.)

For use with 6007-YE, 6002-YE, 6004-YE



\*items sold separately



## DOUBLE POLY-RACKER

6000-YE	
Dimensions	49 in. x 53 in. x 23 (124.5 cm. x 135.9 cm. x 58.4 cm.)
Weight	105 lbs. (47.6 kg.)
Spill Capacity	102 gal. (386.1 L.)
Load Capacity	3,000 lbs. (1,360.8 kg.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## DOUBLE POLY-STACKER

6002-YE	
Dimensions	49 in. x 40.75 in. x 12.75 in. (124.5 cm. x 103.6 cm x 32.4 cm.)
Weight	50 lbs. (22.7 kg.)
Load Capacity	1,500 lbs. (680.4 kg.)



## UNIVERSAL WELL LINER

6005-BK	
Dimensions	17.5 in. x 14.5 in. x 2.5 in. (44.5 cm. x 36.8 cm. x 6.4 cm.)
Weight	1.25 lbs. (0.6 kg.)
Spill Capacity	0.4 gal. (1.5 L.)
For use with	6006-YE, 6000-YE, 5300-YE (-A)



\*items sold separately

## MULTI-PURPOSE POLY-STACKER

### 6004-YE

Dimensions	48.5 in. x 41 in. x 20 in. (123.2 cm. x 104.1 cm. x 50.8 cm.)
Weight	67 lbs. (30.4 kg.)
Load Capacity	2,400 lbs. (1,088.6 kg.)




\*Pair with a 5400-YE (page 17) to be EPA compliant. (as shown above)

## MOBILE MINI POLY-RACKER

### 6011-YE-M

Dimensions	31 in. x 29 in. x 15.25 in. (78.7 cm. x 73.7 x 38.7 cm.)
Weight	32 lbs. (14.5 kg.)
Spill Capacity	8 gal. (30.3 L.)
Load Capacity	200 lbs. (90.7 kg.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES

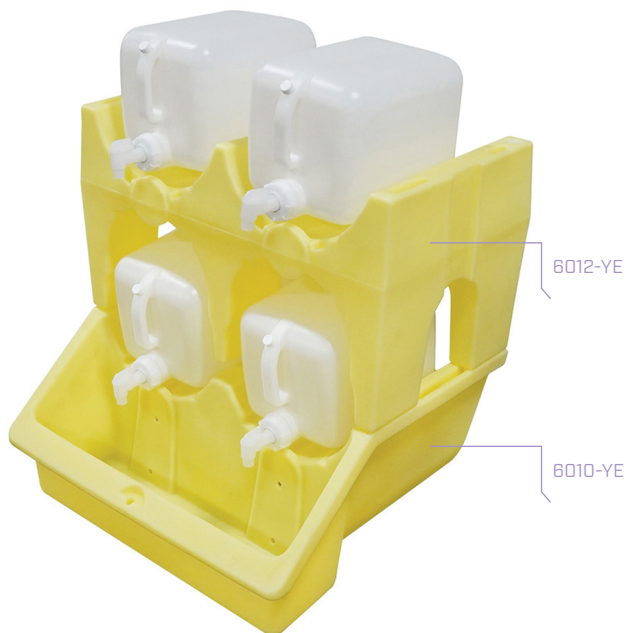

## MINI POLY-RACKER

### 6010-YE

Dimensions	28 in. x 29.75 in. x 14.5 in. (71.1 cm. x 75.6 cm. x 36.8 cm.)
Weight	24 lbs. (10.9 kg.)
Spill Capacity	8 gal. (30.3 L.)
Load Capacity	200 lbs. (90.7 kg.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## MINI POLY-STACKER

### 6012-YE

Dimensions	31 in. x 19 in. x 18.25 in. (78.7 cm. x 48.3 cm. x 46.4 cm.)
Weight	15 lbs. (6.8 kg.)
Load Capacity	100 lbs. (45.4 kg.)



## POLY SAFETY PACK OUTDOOR DRUM STORAGE

### 2038-YE

Dimensions 60.5 in. x 35 in. x 46.5 in. (153.7 cm. x 88.9 cm. x 118.1 cm.)

Weight 113 lbs. (51 kg.)

Spill Capacity 130 gal. (492.1 L.)

Load Capacity 1,200 lbs. (544.3 kg.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## POLY SAFETY PACK XL OUTDOOR DRUM STORAGE

### 2077-YE

Dimensions 60.5 in. x 35 in. x 63.25 in. (153.7 cm. x 88.9 cm. x 160.7 cm.)

Weight 139 lbs. (63.1 kg.)

Spill Capacity 264 gal. (999.4 L.)

Load Capacity 1,200 lbs. (544.3 kg.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## CASTER FRAME FOR POLY SAFETY PACKS

### 2200-BK

Dimensions 31.5 in x 30 in. x 4.5 in. (80 cm. x 76.2 cm. x 11.4 cm.)

Weight 36 lbs. (16.3 kg.)

Load Capacity 1,200 lbs. (544.3 kg.)



## ▶ HAVE YOU HEARD?

The tall sidewalls of the XL Safety Pack allow the pump to be left on the drums with the doors closed!



= Drain available



### 275-GALLON TANK CONTAINMENT SUMP

5275-BK	
Dimensions	82 in. x 45 in. x 35.5 in. (208.3 cm. x 114.3 cm. x 90.2 cm.)
Weight	98 lbs. (44.5 kg.)
Spill Capacity	275 gal. (1,041 L.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



### 550-GALLON TANK CONTAINMENT SUMP

5550-BK	
Dimensions	113 in. x 71 in. x 32 in. (287 cm. x 180.3 cm. x 81.3 cm.)
Weight	171 lbs. (77.6 kg.)
Spill Capacity	750 gal. (2,839.1 L.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



= Tarp available = Drain available



## LARGE TOTE BIN

### 1500-YE

Dimensions	45 in. x 35.5 in. x 30.5 in. [114.3 cm. x 90.2 cm. x 77.5 cm.]
Weight	49 lbs. [22.2 kg.]
Spill Capacity	123 gal. [465 L.]
Load Capacity	500 lbs. [226.8 kg.]

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## LARGE TOTE LID

### 1501-YE

Dimensions	45 in. x 35.5 in. x 5 in. [114.3 cm. x 90.2 cm. x 12.7 cm.]
Weight	8 lbs. [3.6 kg.]

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## LARGE TOTE BIN WITH LID

### 1505-YE

Dimensions	45 in. x 35.5 in. x 30.4 in. [114.3 cm. x 90.2 cm. x 77.2 cm.]
Weight	57 lbs. [25.9 kg.]
Spill Capacity	123 gal. [465 L.]
Load Capacity	500 lbs. [226.8 kg.]

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## LARGE TOTE BIN WITH LID AND 4 IN. URETHANE WHEELS

### 1510-YE

Dimensions	45 in. x 35.5 in. x 36 in. [114.3 cm. x 90.2 cm. x 91.5 cm.]
Weight	56 lbs. [25.4 kg.]
Spill Capacity	123 gal. [465 L.]
Load Capacity	500 lbs. [226.8 kg.]

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## LARGE TOTE BIN WITH LID AND 8 IN. RUBBER WHEELS

### 1511-YE

Dimensions	45 in. x 35.5 in. x 40 in. [114.3 cm. x 90.2 cm. x 101.6 cm.]
Weight	74 lbs. [33.6 kg.]
Spill Capacity	123 gal. [465 L.]
Load Capacity	500 lbs. [226.8 kg.]

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## EXTRA LARGE TOTE BIN

### 1520-YE

Dimensions	51.5 in. x 47.25 in. x 33 in. (130.8 cm. x 120 cm. x 83.8 cm.)
Weight	54.5 lbs. (24.7 kg.)
Spill Capacity	223 gal. (844 L.)
Load Capacity	500 lbs. (226.8 kg.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## EXTRA LARGE TOTE LID

### 1521-YE

Dimensions	51.5 in. x 47.25 in. x 5 in. (130.8 cm. x 120 cm. x 12.7 cm.)
Weight	12 lbs. (5.4 kg.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## EXTRA LARGE TOTE BIN WITH LID

### 1525-YE

Dimensions	51.5 in. x 47.25 in. x 33 in. (130.8 cm. x 120 cm. x 83.8 cm.)
Weight	76 lbs. (34.5 kg.)
Spill Capacity	223 gal. (844 L.)
Load Capacity	500 lbs. (226.8 kg.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## EXTRA LARGE TOTE BIN WITH LID AND 4 IN. URETHANE WHEELS

### 1530-YE

Dimensions	51.5 in. x 47.25 in. x 38.25 in. (130.8 cm. x 120 cm. x 97.2 cm.)
Weight	86 lbs. (39.1 kg.)
Spill Capacity	223 gal. (844 L.)
Load Capacity	500 lbs. (226.8 kg.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## EXTRA LARGE TOTE BIN WITH LID AND 8 IN. RUBBER WHEELS

### 1531-YE

Dimensions	51.5 in. x 47.25 in. x 51.25 in. (130.8 cm. x 120 cm. x 130.2 cm.)
Weight	98 lbs. (44.5 kg.)
Spill Capacity	223 gal. (844 L.)
Load Capacity	500 lbs. (226.8 kg.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES





## POLY SPILL COLLECTOR 66 WITH STEEL DRUM

**8001-YE**

Dimensions	32 in. x 32 in. x 47 in. (81.2 cm. x 81.2 cm. x 119.3 cm.)
Weight	83 lbs. (37.6 kg.)
Spill Capacity	70 gal. (265 L.)
Load Capacity	600 lbs. (272.2 kg.)

Regulations: EPA 40 CFR 264.175, SPCC and NPDES



## POLY SPILL COLLECTOR 66 WITH STEEL DRUM

**8002-YE**

Dimensions	32 in. x 32 in. x 47 in. (81.2 cm. x 81.2 cm. x 119.3 cm.)
Weight	73 lbs. (33.1 kg.)
Spill Capacity	70 gal. (265 L.)
Load Capacity	600 lbs. (272.2 kg.)

Regulations: EPA 40 CFR 264.175, SPCC and NPDES



## POLY SPILL COLLECTOR 66 SHELL

**8075-YE**

Dimensions	32 in. x 32 in. x 31 in. (81.2 cm. x 81.2 cm. x 78.7 cm.)
Weight	24 lbs. (10.8 kg.)
Spill Capacity	70 gal. (265 L.)

Regulations: EPA 40 CFR 264.175, SPCC and NPDES



## POLY SPILL COLLECTOR 110 WITH POLY DRUM

**8080-YE**

Dimensions	32 in. x 32 in. x 50 in. (81.2 cm. x 81.2 cm. x 127 cm.)
Weight	97 lbs. (43.9 kg.)
Spill Capacity	103 gal. (389.9 L.)
Load Capacity	650 lbs. (294.8 kg.)

Regulations: EPA 40 CFR 264.175, SPCC and NPDES



## POLY SPILL COLLECTOR 110 WITH STEEL DRUM

**8081-YE**

Dimensions	32 in. x 32 in. x 50 in. (81.2 cm. x 81.2 cm. x 127 cm.)
Weight	111 lbs. (50.3 kg.)
Spill Capacity	103 gal. (389.9 L.)
Load Capacity	650 lbs. (294.8 kg.)

Regulations: EPA 40 CFR 264.175, SPCC and NPDES



## DRUM DOLLY

**8050**

Diameter	28 in. (71.1 cm.)
Height	5 in. (12.7 cm.)
Weight	23 lbs. (10.4 kg.)
Load Capacity	900 lbs. (408.2 kg.)

\*Compatible with Drums sized 20 to 95-gallon, including 1040-YE

## UNIVERSAL POLY DRUM FUNNEL

3004-YE

Dimensions 26.5 in. x 25.5 in. x 7 in. (67.3 cm. x 64.8 cm. x 17.8 cm.)

Weight 3 lbs. (1.4 kg.)

Regulations: EPA, SPCC, NPDES



## UNIVERSAL POLY DRUM FUNNEL COVER

3040-YE

Dimensions 26 in. x 26 in. x 5.5 in. (66.1 cm. x 66.1 cm. x 14 cm.)

Weight 3 lbs. (1.4 kg.)

Regulations: EPA, SPCC, NPDES



## UNIVERSAL POLY DRUM SAFETY FUNNEL FOR FLAMMABLES

3004-YE-F

Dimensions 26.5 in. x 25.5 in. x 7 in. (67.3 cm. x 64.8 cm. x 17.8 cm.)

Weight 5 lbs. (2.3 kg.)

Regulations: EPA, SPCC, NPDES



## ▶ IN CASE YOU DIDN'T KNOW...

ENPAC®'s Safety Funnel has a flame arrester and a non-sparking bung closure for flammable liquids.



## POLY PAIL FUNNEL

3005-YE

Dimensions 11.5 in. x 11.5 in. x 4 in. (29.2 cm. x 29.2 cm. x 10.2 cm.)

Weight 2 lbs. (1 kg.)

Regulations: EPA, SPCC and NPDES



## POLY PAIL FUNNEL COVER

3051-YE

Dimensions 9.5 in. x 9.5 in. x 2.5 in. (24.1 cm. x 24.1 cm. x 6.4 cm.)

Weight 1 lb. (0.5 kg.)

Regulations: EPA, SPCC and NPDES



## POLY EDGE TRUCK MOUNT - BLACK

### 1601-BK

Dimensions	34 in. x 20 in. x 16 in. (86.4 cm x 50.8 cm. x 40.6 cm.)
Weight	14 lbs. (6.4 kg.)
Load Capacity	75 lbs. (34.2 kg.)



## POLY EDGE TRUCK MOUNT - YELLOW

### 1601-YE


Dimensions	34 in. x 20 in. x 16 in. (86.4 cm. x 50.8 cm. x 40.6 cm.)
Weight	14 lbs. (6.4 kg.)
Load Capacity	75 lbs. (34.2 kg.)



## FLEXIBLE RACK SUMP INSERT

### 464248-RS

Dimensions	48 in. x 36.5 in. x 3 in. (121.9 cm. x 92.7 cm. x 7.6 cm.)
Weight	3 lbs. (1.4 kg.)
Spill Capacity	3 gal. (11.4 L.) per min.

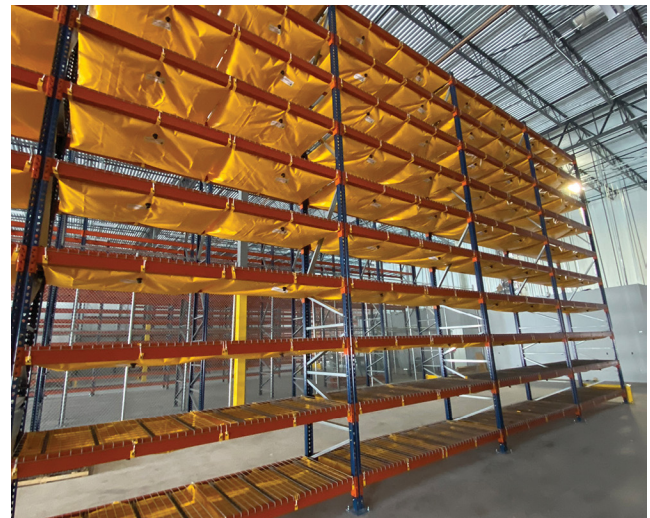

## Q-VAC™ 100 HAZMAT VACUUM

### QVAC

Dimensions	28 in. x 13 in. x 7 in. (71.1 cm. x 33 cm. x 17.8 cm.)
Weight	11 lbs. (5 kg.)

Regulations: 40 CFR 112.7, 40 CFR 122.26, 29 CFR 1910.22(a)(2)



\*Explosion proof version available. Part Number Q-VAC 100X

## Q-VAC™ 100 HAZMAT VACUUM WITH SPILL SCOOTER

### QVAC PLUS

Dimensions	34 in. x 37 in. x 9 in. (86.4 cm. x 94 cm. x 22.9 cm.)
Weight	31 lbs. (14.1 kg.)

Regulations: 40 CFR 112.7, 40 CFR 122.26, 29 CFR 1910.22(a)(2)



\*Drum not included





### STEEL IBC TOTE HAZMAT STORAGE LOCKER

9569-WH	
Exterior Dimensions	60 in. x 60 in. x 100 in. (152.4 cm. x 152.4 cm. x 254 cm.)
Interior Dimensions	57 in. x 58 in. x 67 in. (144.8 cm. x 147.3 cm. x 170.2 cm.)
Weight	1,300 lbs. (589.7 kg.)
Spill Capacity	460 gal. (1,741 L.)
Load Capacity	5,000 lbs. (2,268 kg.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES




### STEEL DOUBLE IBC TOTE HAZMAT STORAGE LOCKER

9580-WH	
Exterior Dimensions	120 in. x 70 in. x 90 in. (304.8 cm. x 177.8 cm. x 228.6 cm.)
Interior Dimensions	117 in. x 67 in. x 90 in. (297.2 cm. x 170.2 cm. x 228.6 cm.)
Weight	2,600 lbs. (1,179.3 kg.)
Spill Capacity	781 gal. (2,956.4 L.)
Load Capacity	500 psf. (2,441.2 kN/m <sup>2</sup> )

Regulations: EPA 40 CFR 264.175, SPCC, NPDES

## MINIMUM REQUIRED FIRE RATING

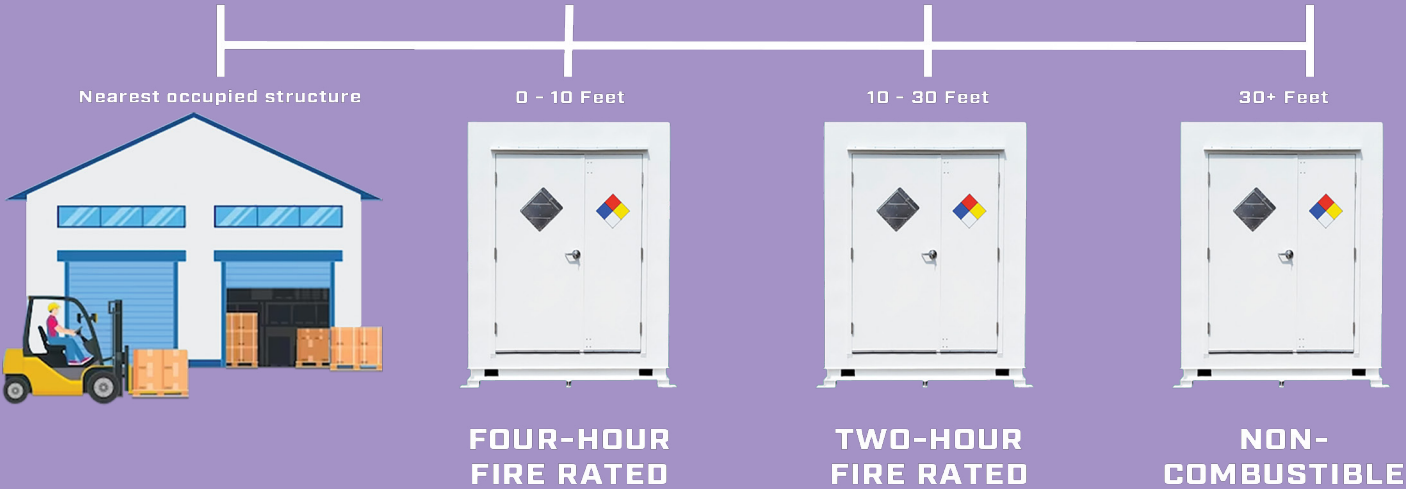



## STEEL HAZMAT STORAGE BUILDINGS, NON-COMBUSTIBLE

PART NUMBER	EXTERNAL DIMENSIONS LxWxH IN. (CM.)	INTERNAL DIMENSIONS LxWxH IN. (CM.)	WEIGHT LB. (KG.)	SPILL CAPACITY GAL. (L.)
9504-WH	60 x 60 x 108 (152 x 152 x 274)	56 x 56 x 92 (142 x 142 x 233)	1,800 (816)	82 (310)
9506-WH	60 x 84 x 108 (152 x 213 x 274)	56 x 80 x 92 (142 x 203 x 233)	2,300 (1,043)	117 (442)
9508-WH	84 x 84 x 108 (213 x 213 x 274)	80 x 80 x 92 (203 x 203 x 233)	3,150 (1,428)	167 (632)
9510-WH	120 x 96 x 108 (304 x 243 x 274)	115 x 90 x 92 (292 x 228 x 233)	4,000 (1,814)	279 (1,056)
9512-WH	144 x 96 x 108 (365 x 243 x 274)	139 x 90 x 92 (353 x 228 x 233)	4,800 (2,177)	336 (1,271)
9514-WH	168 x 96 x 108 (426 x 243 x 274)	163 x 90 x 92 (414 x 228 x 233)	5,600 (2,540)	394 (2,441)

Regulations: EPA 40 CFR 264.175, NFPA 30, NFPA 70, NFPA 400, IBC, UFC, UBC, OSHA

### 5'x'7 TO 7'x'7' STEEL BUILDING SHELVING KIT

9516	
Dimensions	60 in. x 16 in. x 1 in. (152 cm. x 40 cm. x 2 cm.)
Weight	15 lbs. (6.8 kg.)
Load Capacity	40 psf. (1.9 kN/m <sup>2</sup> )

### 10'x'8 TO 14'x'8' STEEL BUILDING SHELVING KIT

9517	
Dimensions	96 in. x 16 in. x 1 in. (243 cm. x 40 cm. x 2 cm.)
Weight	20 lbs. (9.1 kg.)
Load Capacity	40 psf. (1.9 kN/m <sup>2</sup> )

### STEEL BUILDING RAMP

9515	
Dimensions	72 in. x 36 in. x 6 in. (182 cm. x 91 cm. x 15 cm.)
Weight	60 lbs. (27.2 kg.)




## ▶ IN CASE YOU DIDN'T KNOW...

ENPAC®'s steel buildings are 100% customizable to each application. 2-hour and 4-hour fire-rated buildings are also available. Contact ENPAC® today with inquiries!



# CYLINDER STORAGE



Naturally non-sparking plastic cylinder products prevent accidental explosions, enhancing workplace safety and optimizing efficiency in daily operations.



# ► CYLINDER STORAGE

Storing cylinders safely and securely is vital for shop operation.

- **Dollies:** Easily move cylinders around workspaces with a durable, naturally non-sparking dolly. The included straps or chains secure cylinders for transport. (Pages 51-52)
- **Cylinder Wall Brackets:** Improve workplace safety by providing secure storage with the ENPAC® wall bracket. Link together to create storage for any number of cylinders on a wall or in a truck for transport. (Page 53)
- **Poly Stands:** Poly Stands securely store cylinders of various sizes without the threat of sparking associated with similar metal alternatives. These stands eliminate clutter around the workplace and come with straps to secure safely. (Pages 53-54)

## REGULATIONS

### OSHA 29 CFR.1910.253

Cylinders shall not be kept in unventilated enclosures such as lockers and cupboards. (b) (2)(ii) Cylinders should be kept at least 20 ft. (6.1 m.) from highly combustible materials, should be placed away from elevators, stairs and gangways. (b)(3)(i) For storage in excess of 2,000 cu. ft. (56 cu. m.) total gas capacity of cylinders or 300 lbs. (135.9 kg.) of liquefied petroleum gas, separate rooms or compartments shall be provided.



# ► DUAL CYLINDER DOLLY

The ideal mode of transport for gas cylinders.

The Dual Cylinder Dolly is designed to be a more functional, maneuverable, and better-balanced transporter for gas cylinders than conventional dollies or forklifts.





## SINGLE CYLINDER DOLLY

### 7301-BK

Dimensions 24.5 in x 22.25 in. x 46 in. (62.2 cm. x 56.6 cm. x 116.8 cm.)

Weight 25 lbs. (11.3 kg.)

Load Capacity 250 lbs. (113.4 kg.)

All-Terrain 7301-BK-A

Regulations: OSHA 29 CFR 1910.253



## DUAL CYLINDER DOLLY

### 7302-BK

Dimensions 24.5 in. x 30 in. x 45.5 in. (62.2 cm. x 76.2 cm. x 115.6 cm.)

Weight 57 lbs. (25.9 kg.)

Load Capacity 500 lbs. (226.8 kg.)

Regulations: OSHA 29 CFR 1910.253





## UNIVERSAL CYLINDER STORAGE BRACKET

### 7216-YE

Dimensions 15.5 x 6.5 x 3.5 in. (39.4 cm. x 16.5 cm. x 8.9 cm.)

Weight 1 lb. (0.5 kg.)

Regulations: OSHA 29 CFR.1910



\*(2) 7216-YE shown connected

## 2-CYLINDER POLY STAND

### 7212-YE

Dimensions 28 in. x 14 in. x 30 in. (71.1 cm. x 35.6 cm. x 76.2 cm.)

Weight 14 lbs. (6.4 kg.)

Load Capacity 400 lbs. (181.4 kg.)

Regulations: OSHA 29 CFR 1910.253



## 4-CYLINDER POLY STAND

### 7213-YE

Dimensions 41 in. x 29 in. x 46.5 in. (104.1 cm. x 73.7 cm. x 118.1 cm.)

Weight 46 lbs. (20.9 kg.)

Load Capacity 800 lbs. (362.9 kg.)

Regulations: OSHA 29 CFR 1910.253



## REPLACEMENT STRAP

### 7205-BK

Dimensions 22.5 in. x 1 in. (57.2 cm. x 2.5 cm.)

Weight 1 lb. (0.5 kg.)



REPLACEMENT STRAP  
FOR: 7301-BK (-A), 7216-YE,  
7213-YE, 7212-YE, 7202-YE

## 6-CYLINDER STORAGE RACK WHEELED CASTER FRAME

### 7204-BK

Dimensions 31.5 in. x 30 in. x 4.5 in. (80 cm. x 76.2 cm. x 11.4 cm.)

Weight 50 lbs. (22.7 kg.)

Load Capacity 1,200 lbs. (544.3 kg.)

Regulations: OSHA 29 CFR.1910



## 6-CYLINDER STORAGE RACK

### 7202-YE

Dimensions 47.5 in. x 31 in. x 41 in. (120.7 cm. x 78.7 cm. x 104.1 cm.)

Weight 51 lbs. (23.1 kg.)

Load Capacity 1,200 lbs. (544.3 kg.)

Regulations: OSHA 29 CFR.1910



## 6-CYLINDER STORAGE RACK RAMP


### 7203-BK

Dimensions 19.25 in. x 45.5 in. x 5 in. (48.9 cm. x 115.6 cm. x 12.7 cm.)

Weight 20 lbs. (9.1 kg.)

Load Capacity 1,000 lbs. (453.6 kg.)

Regulations: OSHA 29 CFR.1910

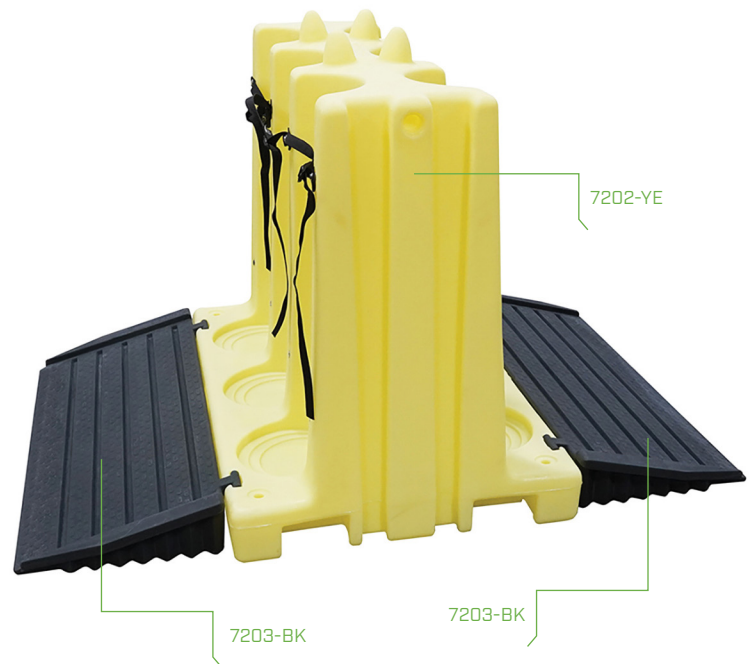

# SPILL BERMS

Made from durable, high-performance industrial materials, ENPAC® spill berms keep job sites clean and free from hazardous spills and leaks - even the unexpected ones.








# ▶ SPILL BERMS

Spill containment berms are portable secondary containment units designed to be a valuable tool in your compliance and clean up arsenal. ENPAC®'s wide range of high-performance industrial berms are the answer to keep your job sites clean and free from hazardous spills and leaks, even the unexpected ones.

ENPAC®'s variety of berms vary by material and style based on a customer's application and preference.

## BERM WALL TYPES

TYPE	TRIANGULAR STAY	L-BRACKET STAY	FOAM WALL
DESCRIPTION	 <p>Triangular stay brackets are attached to the berms to avoid risk of losing product, meaning no loose pieces will go missing. The triangular stay must be folded down in order to drive over.</p>	 <p>L-Brackets are wire or aluminum, vary by 1' or 2', and provide a stable wall. These are loose pieces and can be easily installed or removed to drive over the berm with trucks and vehicles.</p>	 <p>Foam wall berms require minimal to no set up. Easily drive over the berm without needing to change the position of the walls.</p>
STANDARD WITH	<p>Snap-Up PVC, Snap-Up, and Yellow Jacket</p>	<p>Aluminum L-Bracket, Wire L-Bracket, FracTank, Stinger 2' L-Bracket, IBC Berm, and ISO Tank Berm</p>	<p>Self-Rising, Snap-Foam, and Stinger SpillPal</p>



### MATERIAL TYPES

TYPE	PVC	ELVALOY COPOLYMER	ENDURALINE 40
MATERIAL	PVC COATED POLYESTER	ELVALOY COATED POLYESTER	POLYETHYLENE
PUNCTURE RESISTANCE	287 LBF	275 LBF	267 LBF
COLD CRACK	-40° F	-30° F	-60° F
WEIGHT	22 OZ.	30 OZ.	19 OZ.
THICKNESS	THIN [22 MILS]	MEDIUM [30 MILS]	THICK [40 MILS]
COLOR	YELLOW, BLACK	BLACK	BLACK
STANDARD WITH	Snap-Up PVC, Yellow Jacket, and IBC Berm	Snap-Up, 2' L-Bracket, Self-Rising, Snap-Foam	Wire L-Bracket, Aluminum L-Bracket, FracTank, ISO Tank, and Stinger SpillPal



# ► L-BRACKET SPILL CONTAINMENT BERM

The newest addition to the L-Bracket line!

In a word, or four – simple, rugged, quick, inexpensive. The Black Diamond L-Bracket spill containment berm is designed for quick and simple setup with durability and budget in mind.

**Quality Assurance:**

- Liquid tested and reviewed for leaks
- CAD designed and cut components
- All berms include serial numbers for quality tracking

**Various sizes and applications:**

- **Small sizes** commonly contain light plants, generators, light equipment, 55-gallon drums, and IBCs
- **Medium sizes** include containment for medium-size equipment, small vehicles, IBCs, and machinery
- **Large sizes** commonly contain large tankers, military vehicles, large equipment, and bulk storage of drums/IBCs

FOLDS TO A FRACTION OF ITS SIZE FOR STORAGE AND TRANSPORT

GROUND PAD AND TRACMAT AVAILABLE TO PROLONG LIFE OF BERM (NOT PICTURED)

ONCE INSTALLED, WIRE BRACKETS REMAIN ATTACHED

ENDURALINE 40 – FIRST-CLASS CHEMICAL, RIP, TEAR, AND PUNCTURE RESISTANCE

FAST AND EASY SETUP

MANY SIZES AND CUSTOMIZABLE TO APPLICATION

TESTED WELDS TO ENSURE MAXIMUM PERFORMANCE



## L-BRACKET ENDURALINE 40

PART NUMBER	DIMENSIONS LxWxH FT. (M.)	WEIGHT LB. (KG.)	SPILL CAPACITY* GAL. (L.)
BD-44-WB-L	4 x 4 x 1 (1.2 x 1.2 x 0.3)	16 (7.3)	119 (450)
BD-46-WB-L	4 x 6 x 1 (1.2 x 1.8 x 0.3)	18 (8.1)	179 (677)
BD-55-WB-L	5 x 5 x 1 (1.5 x 1.5 x 0.3)	19 (8.6)	187 (707)
BD-48-WB-L	4 x 8 x 1 (1.2 x 2.4 x 0.3)	20 (9)	239 (904)
BD-66-WB-L	6 x 6 x 1 (1.8 x 1.8 x 0.3)	21 (9.5)	269 (1,018)
BD-68-WB-L	6 x 8 x 1 (1.8 x 2.4 x 0.3)	22 (10)	359 (1,358)
BD-88-WB-L	8 x 8 x 1 (2.4 x 2.4 x 0.3)	24 (10.8)	478 (1,809)
BD-810-WB-L	8 x 10 x 1 (2.4 x 3 x 0.3)	25 (11.3)	598 (2,263)
BD-1010-WB-L	10 x 10 x 1 (3 x 3 x 0.3)	29 (13.2)	748 (2,831)
BD-1020-WB-L	10 x 20 x 1 (3 x 6.1 x 0.3)	98 (44)	1,496 (5,662)
BD-1030-WB-L	10 x 30 x 1 (3 x 9.1 x 0.3)	105 (47)	2,244 (8,494)
BD-1040-WB-L	10 x 40 x 1 (3 x 12.2 x 0.3)	140 (63)	2,992 (11,325)
BD-1050-WB-L	10 x 50 x 1 (3 x 15.2 x 0.3)	160 (72)	3,740 (14,157)
BD-1060-WB-L	10 x 60 x 1 (3 x 18.3 x 0.3)	192 (87)	4,488 (16,988)
BD-1212-WB-L	12 x 12 x 1 (3.6 x 3.6 x 0.3)	77 (35)	1,077 (4,077)
BD-1220-WB-L	12 x 20 x 1 (3.6 x 6.1 x 0.3)	100 (45)	1,795 (6,795)
BD-1226-WB-L	12 x 26 x 1 (3.6 x 7.9 x 0.3)	105 (47)	2,334 (8,835)
BD-1230-WB-L	12 x 30 x 1 (3.6 x 9.1 x 0.3)	115 (52)	2,692 (10,190)
BD-1236-WB-L	12 x 36 x 1 (3.6 x 11 x 0.3)	140 (63)	3,231 (12,230)
BD-1240-WB-L	12 x 40 x 1 (3.6 x 12.2 x 0.3)	150 (68)	3,590 (13,589)
BD-1250-WB-L	12 x 50 x 1 (3.6 x 15.2 x 0.3)	175 (79)	4,488 (16,989)
BD-1440-WB-L	14 x 40 x 1 (4.2 x 12.2 x 0.3)	170 (77)	4,189 (15,857)
BD-1550-WB-L	15 x 50 x 1 (4.5 x 15.2 x 0.3)	240 (108)	5,654 (21,402)
BD-2525-WB-L	25 x 25 x 1 (7.6 x 7.6 x 0.3)	200 (91)	4,675 (17,696)
BD-2550-WB-L	25 x 50 x 1 (7.6 x 15.2 x 0.3)	400 (182)	9,350 (35,393)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



\*The berm spill capacity is based on dimensions, low flow rate, a level surface and no displaced volume.

## ALUMINUM L-BRACKET ENDURALINE 40

PART NUMBER	DIMENSIONS LxWxH FT. (M.)	WEIGHT LB. (KG.)	SPILL CAPACITY* GAL. (L.)
BD-44-AL-L	4 x 4 x 1 (1.2 x 1.2 x 0.3)	16 (7.3)	119 (450)
BD-46-AL-L	4 x 6 x 1 (1.2 x 1.8 x 0.3)	18 (8.1)	179 (677)
BD-55-AL-L	5 x 5 x 1 (1.5 x 1.5 x 0.3)	20 (9)	187 (707)
BD-68-AL-L	6 x 8 x 1 (1.8 x 2.4 x 0.3)	22 (10)	359 (1,358)
BD-810-AL-L	8 x 10 x 1 (2.4 x 3 x 0.3)	25 (11.3)	598 (2,263)
BD-1010-AL-L	10 x 10 x 1 (3 x 3 x 0.3)	39 (17)	748 (2,831)
BD-1020-AL-L	10 x 20 x 1 (3 x 6.1 x 0.3)	98 (44)	1,496 (5,662)
BD-1030-AL-L	10 x 30 x 1 (3 x 9.1 x 0.3)	105 (47)	2,244 (8,494)
BD-1040-AL-L	10 x 40 x 1 (3 x 12.2 x 0.3)	120 (54)	2,992 (11,325)
BD-1050-AL-L	10 x 50 x 1 (3 x 15.2 x 0.3)	134 (60)	3,740 (14,157)
BD-1060-AL-L	10 x 60 x 1 (3 x 18.3 x 0.3)	192 (87)	4,488 (16,988)
BD-1212-AL-L	12 x 12 x 1 (3.6 x 3.6 x 0.3)	77 (35)	1,077 (4,077)
BD-1220-AL-L	12 x 20 x 1 (3.6 x 6.1 x 0.3)	100 (45)	1,795 (6,795)
BD-1226-AL-L	12 x 26 x 1 (3.6 x 7.9 x 0.3)	105 (47)	2,334 (8,835)
BD-1230-AL-L	12 x 30 x 1 (3.6 x 9.1 x 0.3)	115 (52)	2,692 (10,190)
BD-1236-AL-L	12 x 36 x 1 (3.6 x 11 x 0.3)	140 (63)	3,231 (12,230)
BD-1250-AL-L	12 x 50 x 1 (3.6 x 15.2 x 0.3)	175 (79)	4,488 (16,989)
BD-1440-AL-L	14 x 40 x 1 (4.2 x 12.2 x 0.3)	170 (77)	4,189 (15,857)
BD-1550-AL-L	15 x 50 x 1 (4.5 x 15.2 x 0.3)	240 (108)	5,654 (21,402)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



\*The berm spill capacity is based on dimensions, low flow rate, a level surface and no displaced volume.

## FRACTANK ENDURALINE 40



### BD-10501-FT

Dimensions	10 ft. x 50 ft. x 1 ft. (3.1 m. x 15.2 m. x 0.3 m.)
Weight	133 lbs. (60.3 kg.)
Spill Capacity*	3,740 gal. (14,157.4 L.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## ISO TANK ENDURALINE 40



### BD-10242-SS-P

Dimensions	24 ft. x 10 ft. x 2 ft. (7.3 m. x 3 m. x 0.6 m.)
Weight	235 lb. (106.6 kg.)
Spill Capacity*	3,590 gal. (13,589 L.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



### BD-20242-SS-P

Dimensions	24 ft. x 20 ft. x 2 ft. (7.3 m. x 6.1 m. x 0.6 m.)
Weight	360 lbs. (163.3 kg.)
Spill Capacity*	7,180 gal. (27,179 L.)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



## STINGER 2' L-BRACKET ELVALOY COPOLYMER



PART NUMBER	DIMENSIONS LxWxH FT. [M.]	WEIGHT LB. [KG.]	SPILL CAPACITY* GAL. [L.]
48-10102-BK-SS	10 x 10 x 2 (3 x 3 x 0.61)	200 (90)	1,496 (5,663)
48-10242-BK-SS	10 x 24 x 2 (3 x 7.3 x 0.61)	280 (127)	3,591 (13,592)
48-15152-BK-SS	15 x 15 x 2 (4.6 x 4.6 x 0.61)	331 (150)	3,366 (12,742)
48-20202-BK-SS	20 x 20 x 2 (6.1 x 6.1 x 0.61)	424 (192)	5,984 (22,652)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES

\*The berm spill capacity is based on dimensions, low flow rate, a level surface and no displaced volume.




# ▶ STINGER SNAP-UP COLLAPSIBLE SPILL BERM

## The World Leader in Large, Aggressive and Immediate Spill Response

Stinger Snap-Up spill containment berms are ENPAC®'s most popular and intuitive containment berm. Available in a wide variety of sizes, the triangular stays create a sturdy sidewall and are welded in place, leaving no loose parts that can be lost.

- Compact storage and transport
- Lap joint welds for maximum strength
- Air lance tested to ensure the seal of all welds
- Liquid tested and reviewed for leaks

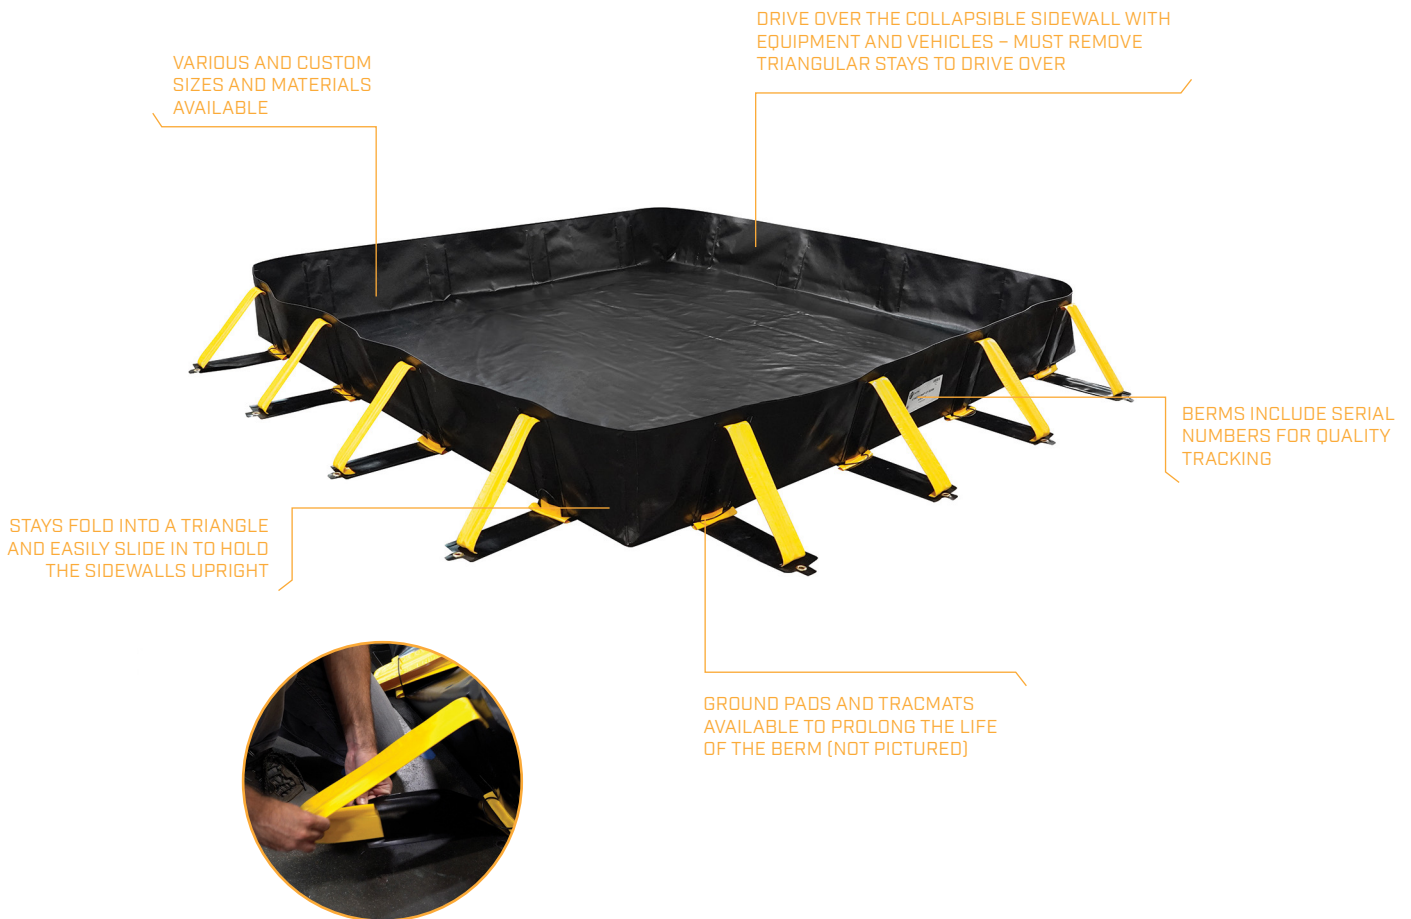

## STINGER SNAP-UP ELVALOY COPOLYMER

PART NUMBER	DIMENSIONS LxWxH FT. [M.]	WEIGHT LB. [KG.]	SPILL CAPACITY* GAL. [L.]
48-448-BK-SU	4 x 4 x 8 in. [1.2 x 1.2 x 20 cm.]	16 [7.2]	80 [302]
48-441-BK-SU	4 x 4 x 1 [1.2 x 1.2 x 0.3]	17 [7.7]	119 [451]
48-468-BK-SU	4 x 6 x 8 in. [1.2 x 1.8 x 20 cm.]	19 [8.6]	119 [451]
48-461-BK-SU	4 x 6 x 1 [1.2 x 1.8 x 0.3]	20 [9.1]	179 [678]
48-488-BK-SU	4 x 8 x 8 in. [1.2 x 2.4 x 20 cm.]	25 [11]	159 [602]
48-5101-BK-SU	5 x 10 x 1 [1.5 x 3 x 0.3]	34 [15]	374 [1,416]
48-661-BK-SU	6 x 6 x 1 [1.8 x 1.8 x 0.3]	25 [11]	269 [1,018]
48-681-BK-SU	6 x 8 x 1 [1.8 x 2.4 x 0.3]	31 [14]	359 [1,358]
48-888-BK-SU	8 x 8 x 8 in. [2.4 x 2.4 x 20 cm.]	32 [14]	319 [1,207]
48-10101-BK-SU	10 x 10 x 1 [3 x 3 x 0.3]	50 [22]	748 [2,831]
48-12121-BK-SU	12 x 12 x 1 [3.7 x 3.7 x 0.3]	83 [37]	1,077 [4,077]
48-12201-BK-SU	12 x 20 x 1 [3.7 x 6 x 0.3]	107 [48]	1,795 [6,795]
48-12261-BK-SU	12 x 26 x 1 [3.7 x 7.9 x 0.3]	137 [62]	2,334 [8,835]
48-12301-BK-SU	12 x 30 x 1 [3.7 x 9.1 x 0.3]	155 [70]	2,692 [10,190]
48-12361-BK-SU	12 x 36 x 1 [3.7 x 11 x 0.3]	172 [78]	3,231 [12,230]
48-12501-BK-SU	12 x 50 x 1 [3.7 x 15.2 x 0.3]	234 [106]	4,488 [16,989]
48-12601-BK-SU	12 x 60 x 1 [3.7 x 18.3 x 0.3]	268 [121]	5,385 [20,384]
48-14541-BK-SU	14 x 54 x 1 [4.3 x 16.5 x 0.3]	252 [114]	5,654 [21,402]
48-14661-BK-SU	14 x 66 x 1 [4.3 x 20.1 x 0.3]	337 [153]	6,911 [26,160]
48-14851-BK-SU	14 x 85 x 1 [4.3 x 25.9 x 0.3]	500 [227]	8,901 [33,693]
48-15501-BK-SU	15 x 50 x 1 [4.6 x 15.2 x 0.3]	268 [121]	5,610 [21,236]
48-16161-BK-SU	16 x 16 x 1 [4.9 x 4.9 x 0.3]	113 [51]	1,914 [7,245]
48-20401-BK-SU	20 x 40 x 1 [6 x 12.2 x 0.3]	260 [117]	5,984 [22,652]
48-20601-BK-SU	20 x 60 x 1 [6 x 18.3 x 0.3]	412 [186]	8,976 [33,979]
48-25401-BK-SU	25 x 40 x 1 [7.6 x 12.2 x 0.3]	337 [152]	7,480 [28,314]

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



\*The berm spill capacity is based on dimensions, low flow rate, a level surface and no displaced volume.

## YELLOW JACKET PVC



PART NUMBER	DIMENSIONS LxWxH FT. [M.]	WEIGHT LB. [KG.]	SPILL CAPACITY* GAL. [L.]
57-448-YE-SU	4 x 4 x 8 in. (1.22 x 1.22 x 20.3 cm.)	14 (6.3)	80 (302)
57-468-YE-SU	4 x 6 x 8 in. (1.22 x 1.83 x 20.3 cm.)	15 (6.8)	120 (454)
57-488-YE-SU	4 x 8 x 8 in. (1.22 x 2.44 x 20.3 cm.)	23 (10)	160 (605)
57-668-YE-SU	6 x 6 x 8 in. (1.83 x 1.83 x 20.3 cm.)	17 (7.7)	180 (681)
57-888-YE-SU	8 x 8 x 8 in. (2.44 x 2.44 x 20.3 cm.)	30 (13)	320 (1,211)
57-8108-YE-SU	8 x 10 x 8 in. (2.44 x 3.05 x 20.3 cm.)	39 (17)	400 (1,514)
57-10108-YE-SU	10 x 10 x 8 in. (3.05 x 3.05 x 20.3 cm.)	35 (15)	501 (1,896)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES

CUSTOMIZE TO ANY SIZE! ADDITIONAL SIZES ALSO AVAILABLE ON [WWW.ENPAC.COM](http://WWW.ENPAC.COM)

## STINGER SNAP-UP PVC



PART NUMBER	DIMENSIONS LxWxH FT. [M.]	WEIGHT LB. [KG.]	SPILL CAPACITY* GAL. [L.]
BD-44	4 x 4 x 1 [1.2 x 1.2 x 0.3]	18 (8)	119 (450)
BD-55	5 x 5 x 1 [1.5 x 1.5 x 0.3]	29 (13)	187 (707)
BD-66	6 x 6 x 1 [1.8 x 1.8 x 0.3]	37 (16)	269 (1,018)
BD-88	8 x 8 x 1 [2.4 x 2.4 x 0.3]	52 (23)	479 (1,813)
BD-1010	10 x 10 x 1 [3 x 3 x 0.3]	60 (27)	748 (2,831)
BD-1212	12 x 12 x 1 [3.6 x 3.6 x 0.3]	80 (36)	1,077 (4,076)
BD-1616	16 x 16 x 1 [4.8 x 4.8 x 0.3]	110 (50)	1,915 (7,249)
BD-1220	12 x 20 x 1 [3.6 x 6 x 0.3]	130 (59)	1,795 (6,794)
BD-1230	12 x 30 x 1 [3.6 x 9.1 x 0.3]	140 (63)	2,693 (10,194)
BD-1240	12 x 40 x 1 [3.6 x 12.2 x 0.3]	200 (90)	3,591 (13,593)
BD-1250	12 x 50 x 1 [3.6 x 15.2 x 0.3]	250 (113)	4,488 (16,989)
BD-1260	12 x 60 x 1 [3.6 x 18.2 x 0.3]	275 (124)	5,385 (20,384)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES



\*The berm spill capacity is based on dimensions, low flow rate, a level surface and no displaced volume.



# ▶ STINGER SNAP-FOAM DRIVE-THROUGH SPILL BERM

Ideal Solution for Indoor and Outdoor Drum Storage!


After a one-time setup, the ENPAC® Snap-Foam spill containment berm allows for continual drive in and out without ever having to modify the sidewalls.



MANY STANDARD SIZES  
AVAILABLE OR CUSTOMIZABLE  
TO APPLICATION

FOLDS TO A FRACTION OF ITS SIZE  
FOR STORAGE AND TRANSPORT

ELVALOY COPOLYMER – RIP, TEAR,  
AND PUNCTURE RESISTANCE

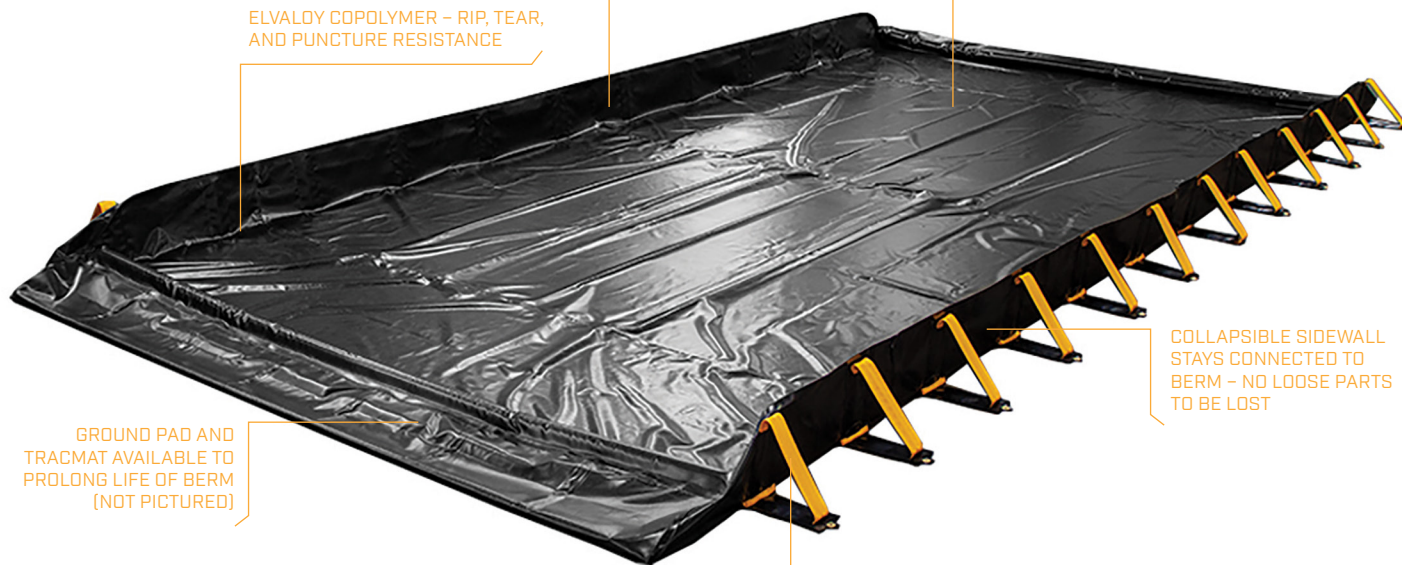

GROUND PAD AND  
TRACMAT AVAILABLE TO  
PROLONG LIFE OF BERM  
(NOT PICTURED)


COLLAPSIBLE SIDEWALL  
STAYS CONNECTED TO  
BERM – NO LOOSE PARTS  
TO BE LOST

STAYS FOLD INTO A  
TRIANGLE AND EASILY  
SLIDE IN TO HOLD THE  
SIDEWALLS UPRIGHT

TRUE DRIVE IN AND OUT  
CAPABILITY AS FOAM WALLS  
AUTOMATICALLY RISE DURING  
A SPILL EVENT



## STINGER SNAP-FOAM DRIVE-THROUGH SPILL BERM ELVALOY COPOLYMER

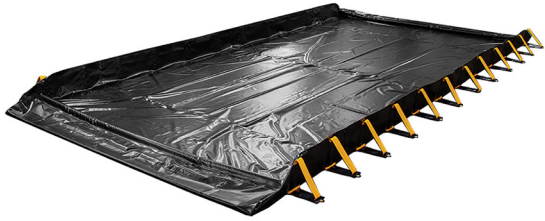

PART NUMBER	DIMENSIONS LxWxH FT. (M.)	WEIGHT LB. (KG.)	SPILL CAPACITY* GAL. (L.)
48-10161-BK-SF	10 x 16 x 1 (3 x 4.9 x 0.3)	90 (40)	1196 (4,527)
48-10261-BK-SF	10 x 26 x 1 (3 x 7.9 x 0.3)	125 (56)	1944 (7,358)
48-12301-BK-SF	12 x 30 x 1 (3.7 x 9 x 0.3)	165 (74)	2,692 (10,190)
48-12361-BK-SF	12 x 36 x 1 (3.7 x 11 x 0.3)	180 (81)	3,231 (12,230)
48-12501-BK-SF	12 x 50 x 1 (3.7 x 15 x 0.3)	215 (97)	4,488 (16,988)
48-12601-BK-SF	12 x 60 x 1 (3.7 x 18.3 x 0.3)	276 (125)	5,385 (20,384)
48-14401-BK-SF	14 x 40 x 1 (4.3 x 12 x 0.3)	216 (97)	4,189 (15,857)
48-14541-BK-SF	14 x 54 x 1 (4.3 x 16.5 x 0.3)	252 (114)	5,654 (21,402)
48-14561-BK-SF	14 x 56 x 1 (4.3 x 17 x 0.3)	265 (120)	5,864 (22,197)
48-14851-BK-SF	14 x 84 x 1 (4.3 x 25.9 x 0.3)	500 (226)	8,901 (33,693)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES

CUSTOMIZE TO ANY SIZE! ADDITIONAL SIZES ALSO AVAILABLE ON [WWW.ENPAC.COM](http://WWW.ENPAC.COM)

## STINGER SELF-RISING FOAM WALL SPILL BERM ELVALOY COPOLYMER



PART NUMBER	DIMENSIONS LxWxH FT. (M.)	WEIGHT LB. (KG.)	SPILL CAPACITY* GAL. (L.)
48-461-BK-SR	4 x 6 x 1 (1.2 x 1.8 x 0.3)	54 (24)	179 (678)
48-10101-BK-SR	10 x 10 x 1 (3 x 3 x 0.3)	60 (27.3)	748 (2,831)
48-10161-BK-SR	10 x 16 x 1 (3 x 4.9 x 0.3)	75 (34)	1,196 (4,527)
48-12261-BK-SR	12 x 26 x 1 (3.7 x 7.9 x 0.3)	105 (47)	2,334 (8,835)
48-12301-BK-SR	12 x 30 x 1 (3.7 x 9.1 x 0.3)	120 (54)	2,692 (10,190)
48-12361-BK-SR	12 x 36 x 1 (3.7 x 11 x 0.3)	160 (72)	3,231 (12,230)
48-14401-BK-SR	14 x 40 x 1 (4.3 x 12 x 0.3)	315 (142)	4,189 (15,857)
48-14541-BK-SR	14 x 54 x 1 (4.3 x 16.5 x 0.3)	349 (158)	5,654 (21,402)

Regulations: EPA 40 CFR 264.175, SPCC, NPDES

\*The berm spill capacity is based on dimensions, low flow rate, a level surface and no displaced volume.

## FOAM WALL STINGER SPILLPAL ENDURALINE 40



PART NUMBER	DIMENSIONS LxWxH FT. [M.]	WEIGHT LB. [KG.]	SPILL CAPACITY* GAL. [L.]
BD-44-FW	4 x 4 x 4 in. [1.2 x 1.2 x 10.1 cm.]	5 [2.2]	39 [147]
BD-810-FW	8 x 10 x 4 in. [2.4 x 3 x 10.1 cm.]	24 [11]	199 [753]
BD-1010-FW	10 x 10 x 4 in. [3 x 3 x 10.1 cm.]	30 [14]	249 [942]
BD-1020-FW	10 x 20 x 4 in. [3 x 6 x 10.1 cm.]	60 [28]	498 [1,885]
BD-1030-FW	10 x 30 x 4 in. [3 x 9.1 x 10.1 cm.]	95 [44]	748 [2,831]
BD-1050-FW	10 x 50 x 4 in. [3 x 15.2 x 10.1 cm.]	119 [54]	1,246 [4,716]
BD-1220-FW	12 x 20 x 4 in. [3.6 x 6 x 10.1 cm.]	71 [33]	598 [2,263]
BD-1230-FW	12 x 30 x 4 in. [3.6 x 9.1 x 10.1 cm.]	98 [45]	891 [3,372]
BD-1250-FW	12 x 50 x 4 in. [3.6 x 15.2 x 10.1 cm.]	150 [68]	1,496 [5,662]
BD-2550-FW	25 x 50 x 4 in. [7.6 x 15.2 x 10.1 cm.]	313 [142]	3,111 [11,776]

CUSTOMIZE TO ANY SIZE! ADDITIONAL SIZES ALSO AVAILABLE ON [WWW.ENPAC.COM](http://WWW.ENPAC.COM)

## ONE-PIECE FOAM WALL STINGER SPILLPAL ENDURALINE 40



NO LOOSE PARTS!

PART NUMBER	DIMENSIONS LxWxH FT. [M.]	WEIGHT LB. [KG.]	SPILL CAPACITY* GAL. [L.]
BD-44-FW-E	4 x 4 x 4 in. [1.2 x 1.2 x 10.1 cm.]	5 [2.2]	39 [147]
BD-810-FW-E	8 x 10 x 4 in. [2.4 x 3 x 10.1 cm.]	24 [11]	199 [753]
BD-1010-FW-E	10 x 10 x 4 in. [3 x 3 x 10.1 cm.]	30 [14]	249 [942]
BD-1020-FW-E	10 x 20 x 4 in. [3 x 6 x 10.1 cm.]	60 [28]	498 [1,885]
BD-1030-FW-E	10 x 30 x 4 in. [3 x 9.1 x 10.1 cm.]	95 [44]	748 [2,831]
BD-1050-FW-E	10 x 50 x 4 in. [3 x 15.2 x 10.1 cm.]	119 [54]	1,246 [4,716]
BD-1220-FW-E	12 x 20 x 4 in. [3.6 x 6 x 10.1 cm.]	71 [33]	598 [2,263]
BD-1230-FW-E	12 x 30 x 4 in. [3.6 x 9.1 x 10.1 cm.]	98 [45]	891 [3,372]
BD-1250-FW-E	12 x 50 x 4 in. [3.6 x 15.2 x 10.1 cm.]	150 [68]	1,496 [5,662]
BD-2550-FW-E	25 x 50 x 4 in. [7.6 x 15.2 x 10.1 cm.]	313 [142]	3,111 [11,776]

\*The berm spill capacity is based on dimensions, low flow rate, a level surface and no displaced volume.



## MODULAR DIVERTER BERM

Divert spilled liquids away from walkways and drains or capture them in a designated area. These diverter berms can connect together to build a berm barrier on site with ease.



### 15'L STRAIGHT SECTION

#### 48-215-DB

Dimensions	15 ft. x 2 in. (4.6 m. x 5.1 cm.)
Weight	3 lbs. (1.4 kg.)

Regulations: EPA, SPCC and NPDES

### 25'L STRAIGHT SECTION

#### 48-225-DB

Dimensions	25 ft. x 2 in. (7.6 m. x 5.1 cm.)
Weight	8 lbs. (3.6 kg.)


Regulations: EPA, SPCC and NPDES

### 50'L BERM KIT

#### 48-250-DBKIT

Dimensions	50 ft. x 2 in. (15.2 m. x 5 cm.)
Weight	26 lbs. (11.7 kg.)
Kit Includes	(2) 25' Straight Sections, (4) 12" Corner Sections, (6) Sill-Thane Sealant Cartridges, (1) 8 oz. Vinyl Cement, (1) Berm Repair Material Roll

Regulations: EPA 40 CFR 112.7, 40 CFR 122.26, 40 CFR 264.175, SPCC and NPDES

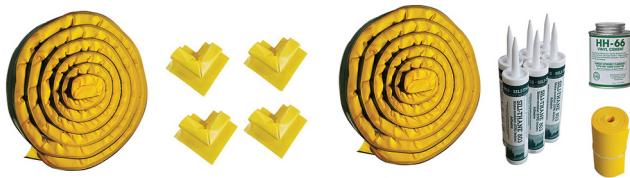

### 12" CORNER SECTION

#### 48-2CORNER-DB

Dimensions	4.5 in. x 2 in. (11.4 cm. x 5.1 cm.)
Length	12 in. (30.5 cm.) (From Corner to End, Long side)
Weight	1 lb. (0.4 kg.)

Regulations: EPA, SPCC and NPDES



### 10" WALL SECTION

#### 48-2WALL-DB

Dimensions	4.8 in. x 2 in. (12.1 cm. x 5.1 cm.)
Length	7 in. (17.7 cm.) (From Corner to End) 3 in. (7.6 cm.) From Corner up the Wall
Weight	1 lb. (0.4 kg.)

Regulations: EPA, SPCC and NPDES



### 12'L DRIVE-OVER KIT

#### 48-212-BK-DBKIT

Dimensions	12 ft. x 2 in. (3.7 m. x 5.1 cm.)
Weight	12 lbs. (5.4 kg.)

Regulations: EPA, SPCC and NPDES



## SIL-THANE 803 SEALANT, CASE OF 6

### ENP SILICS

Size	10.3 fl. oz. (304.6 mL.) per cartridge
Weight	8 lbs. per case



## BERM REPAIR MATERIAL ROLL

### 48-461-BRM-DB


Dimensions	61 in. x 4 in. (154.9 cm. x 10.1 cm.)
Weight	2 lbs. (0.9 kg.)



## INDUSTRIAL STRENGTH VINYL CEMENT


### ENP VINCEM

Dimensions	2 in. x 2 in. x 3.5 in. (5 cm. x 5 cm. x 8.8 cm.)
Weight	8 oz. (226.7 g.)

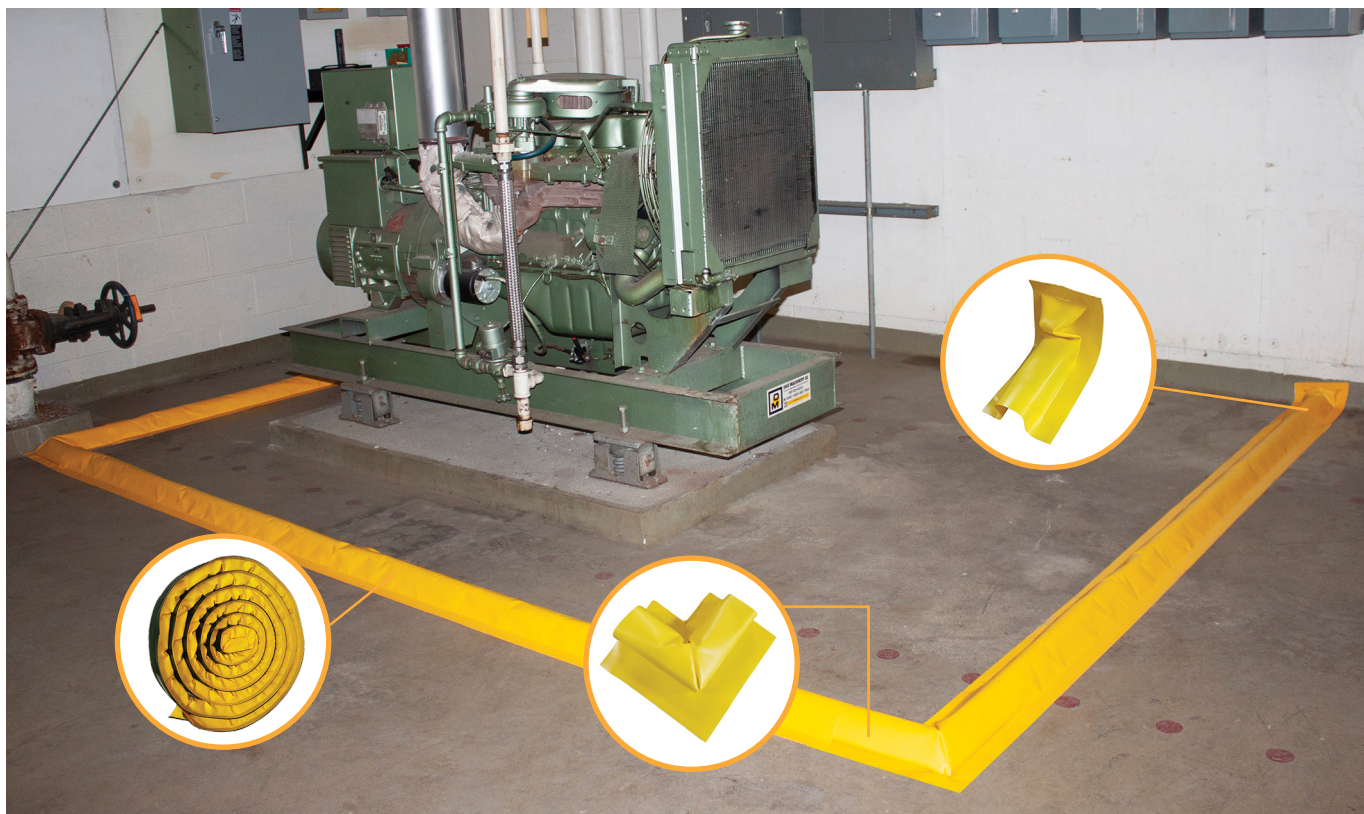



## STINGER POLYBERM

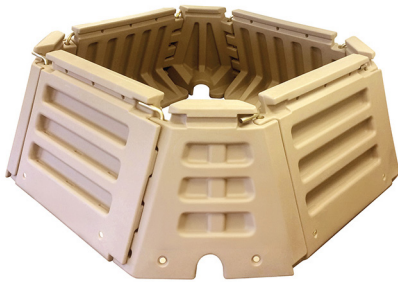

PART NUMBER	FOR USE WITH	DIMENSIONS LxWxH FT. [M.]	SPILL CAPACITY* GAL. [L.]
<b>3'H WALLS</b>			
45-21213-PB-L	10K Bladder	21 x 21 x 3 [6.4 x 6.4 x 0.9]	9,896 [37,460]
45-37373-PB-L	20K Bladder	37 x 37 x 3 [11.3 x 11.3 x 0.9]	30,722 [116,295]
45-37813-PB-L	50K Bladder	37 x 81 x 3 [11.3 x 24.7 x 0.9]	67,257 [254,565]
<b>4'H WALLS</b>			
45-21214-PB-L	10K Bladder	21 x 21 x 4 [6.4 x 6.4 x 1.2]	13,195 [49,948]
45-37374-PB-L	20K Bladder	37 x 37 x 4 [11.3 x 11.3 x 1.2]	40,963 [155,061]
45-37814-PB-L	50K Bladder	37 x 81 x 4 [11.3 x 24.7 x 1.2]	89,676 [339,460]


Regulations: EPA 40 CFR 264.175, SPCC, NPDES



\*The berm spill capacity is based on dimensions, low flow rate, a level surface and no displaced volume.




## BERM ACCESSORIES

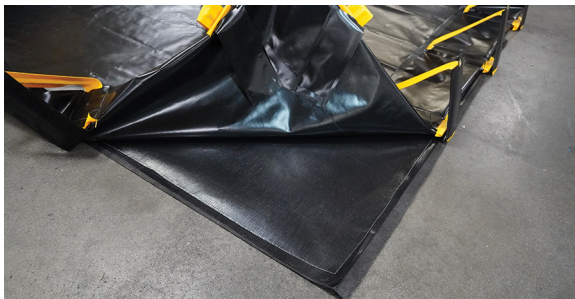

### GROUND PADS

To protect spill containment berms from rough terrain, ENPAC® offers this super-tough, 3-layer ground pad. The ground pad is designed to sit underneath to prevent puncture or tearing of the berm.

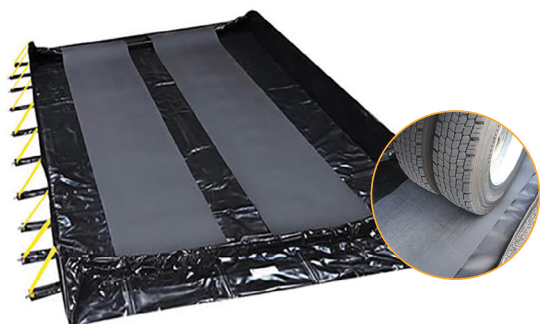

### TRACMAT

Protect spill containment berms from damage by vehicle wheels with heavy-duty belting. The TracMat is designed to sit on top of the berm to avoid puncture and damage to the sump.

Ground pads and TracMats are compatible with all ENPAC® containment berms and are custom designed to fit each size available. For a full list of sizes and part numbers, visit [www.ENPAC.com](http://www.ENPAC.com). Storage and Transport bags also available.

## BAZOOKA PASSIVE OIL FILTER COMPLETE INSTALL KIT

### BAZOOKA-12KIT

Dimensions	15 in. x 4 in. x 4 in. (38.1 cm. x 10.2 cm. x 10.2 cm.)
Weight	4 lbs. (1.8 kg.)
Flow Rate	56 gal. (211.9 L.) per hour

Regulations: EPA, SPCC, NPDES



AUTOMATIC SHUT OFF!


## BAZOOKA REPLACEMENT PASSIVE OIL FILTER CARTRIDGE

### BAZOOKA

Dimensions	7 in. x 4 in. x 4 in. (17.7 cm. x 10.2 cm. x 10.2 cm.)
Weight	2 lbs. (0.9 kg.)
Flow Rate	56 gal. (211.9 L.) per hour

Regulations: EPA, SPCC, NPDES



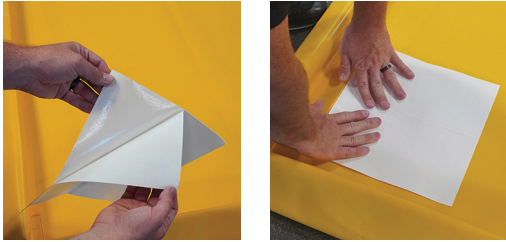

## SPILL BERM ADHESIVE REPAIR PATCHES, 5 PACK

### 48-BRK

Dimensions	11 in. x 8 in. (28 cm. x 20.3 cm.)
Weight	1 lb. (0.5 kg.)

Regulations: EPA, SPCC and NPDES

## 12" BERM DELUXE REPAIR KIT

### 48-BRK-DLX-12

Dimensions	24 in. x 12 in. x 12 in. (61 cm. x 30.4 cm. x 30.4 cm.)
Weight	11 lbs. (4.9 kg.)
Kit Includes	[1] Lockable Tool Box, [1] Heat Gun, [1] Sq. Yd. XR Repair Material, [1] Sq. Yd. PVC Repair Material, [4] 12 in. Replacement Stays, [5] Repair Patches, [1] Roller, [1] Cutting Knife

Regulations: EPA, SPCC and NPDES



## 8" BERM DELUXE REPAIR KIT

### 48-BRK-DLX-8

Dimensions	24 in. x 12 in. x 12 in. (61 cm. x 30.4 cm. x 30.4 cm.)
Weight	11 lbs. (5 kg.)
Kit includes	[1] Lockable Tool Box, [1] Heat Gun, [1] Sq. Yd. XR Repair Material, [1] Sq. Yd. PVC Repair Material, [4] 8 in. Replacement Stays, [5] Repair Patches, [1] Roller, [1] Cutting Knife

Regulations: EPA, SPCC and NPDES




## UNIVERSAL BERM REPAIR KIT

### 48-BRK-STD

Dimensions	24 in. x 12 in. x 12 in. (61 cm. x 30.4 cm. x 30.4 cm.)
Weight	15 lbs. (6.8 kg.)
Kit includes	[1] Heavy-Duty Tool Box, [1] Heat Gun, [1] 8 oz. Vinyl Cement, [1] Seam Roller, [1] 8 in. Scissors, [1] Utility Knife, [3] Sandpaper Sheets, [1] Sq. Ft. PVC Repair Material, [1] Sq. Ft. EnDuraLine 40 Repair Material, [10] Sq. Ft. XR Repair Material

Regulations: EPA, SPCC and NPDES



## HOSE BRIDGE

### 48-8-AL-BR

Dimensions	24 in. x 18 in. x 21.5 in. (61 cm. x 45 cm. x 54 cm.)
Weight	19 lbs. (8.6 kg.)

# RAIL CONTAINMENT

## PELLET PAL - PELLET SPILL TRAY



PART NUMBER	DIMENSIONS LxWxH FT. [M.]	WEIGHT LB. [KG.]
5755-YE-RRPW	2 x 4 x 3 in. [0.6 x 1.2 x 762 cm.]	11 [4.9]
5760-YE-RRPW	4 x 4 x 3 in. [1.2 x 1.2 x 762 cm.]	17 [7.7]

Regulations: Operation Clean Sweep

## RAILCAR TRACK PAN PELLET BERM



PART NUMBER	TYPE	DIMENSIONS LxWxH IN. [CM.]	WEIGHT LB. [KG.]
49-3020-YE-RRCP	Outrigger	20 ft. x 30 x 4 [6.1 m. x 76.2 x 10.1]	40 [18]
49-5620-YE-RRCP	Center	20 ft. x 56 x 4 [6.1 m. x 142.2 x 10.1]	33 [15]
49-3060-YE-RRCP	Outrigger	60 ft. x 30 x 4 [18.3 m. x 76.2 x 10.1]	90 [41]
49-5660-YE-RRCP	Center	60 ft. x 56 x 4 [18.3 m. x 142.2 x 10.1]	93 [43]

Regulations: Operation Clean Sweep

## RAILCAR TRACK PAN SPILL BERM



PART NUMBER	TYPE	DIMENSIONS LxWxH IN. [CM.]	WEIGHT LB. [KG.]	SPILL CAPACITY* GAL. [L.]
49-3020-YE-RRD	Outrigger	20 ft. x 30 x 4 [6.1 m. x 76.2 x 10.1]	40 [18]	124 [472]
49-5620-YE-RRD	Center	20 ft. x 56 x 4 [6.1 m. x 142.2 x 10.1]	55 [24]	232 [878]
49-3060-YE-RRD	Outrigger	60 ft. x 30 x 4 [18.3 m. x 76.2 x 10.1]	55 [24]	374 [1,415]
49-5660-YE-RRD	Center	60 ft. x 56 x 4 [18.3 m. x 142.2 x 10.1]	62 [28]	698 [2,642]

Regulations: Operation Clean Sweep

\*The berm spill capacity is based on dimensions, low flow rate, a level surface and no displaced volume.



## STINGER RAIL TRACK BERM



48-RSB-FS	
Dimensions	6 ft. x 4 ft. x 1 ft. (1.8 m. x 1.2 m. x 0.3 m.)
Weight	38 lbs. (17.2 kg.)
Spill Capacity*	120 gal. (454.2 L.)
Regulations: EPA 40 CFR 264.175, SPCC, NPDES	

## TRACK PANS

PART NUMBER	DESCRIPTION	DIMENSIONS LxWxH FT. (M.)	WEIGHT LB. (KG.)	SPILL CAPACITY* GAL. (L.)
ENP 500FS	20' Full System (1 Center Pan, 2 Out Pans)	See below	400 (181.4)	See below
ENP 500CP20	20' Center Pan	20 x 4.7 x 4 in. (6 x 1.4 x 10 cm.)	182 (82.6)	220 (832.8)
ENP 500OR20	20' Outrigger Pan	20 x 2.5 x 4 in. (6 x 0.7 x 10 cm.)	90 (40.8)	125 (473.2)



**This full system is designed to contain spills, small or large, and prevent leakage into the ground without disrupting normal railcar operations.**

# PORTABLE CONTAINMENT

ENPAC®'s portable containment products offer convenience and compliance all-in-one. These industrial fabric containment products fold up into small, easy-to-manage packages and containers while maintaining durability and performance.





# ▶ PORTABLE CONTAINMENT

Versatility helps businesses stay ahead of competitors, and that means safety equipment needs to be flexible as well. Portable containment products are designed for work on the go with quick deployment and compact folding to easily store in vehicles.

- **Duck Ponds:** For convenient, portable drip and leak protection, Duck Pond mini spill containment berms are the solution. They are ideal for quick use under leaking vehicles or machines for changing various oils or fluids. The Folding Duck Pond easily folds to fit compact spaces for storage. (Pages 77-78)
- **Flexible Utility Trays:** Similar to Folding Duck Ponds, Flexible Utility Trays are low-profile and foldable. Flexible Utility Trays are designed to capture spills and leaks from small containers, such as pails and gas cans. (Page 78)
- **Spill Pads:** Safely contain and store batteries, pails, and other small items with Poly Spill Pads. The included grates allow items or product to sit above any spills to avoid damage. (Page 79)
- **Filter Spill Pads:** Made with recycled materials, Filter Spill Pads are powered by Spilltration® Absorbent Pads to capture oils while allowing water to pass through. (Page 79)
- **Dripillows:** Dripillow spill pads are engineered to be a portable drip-pan to protect against drips and leaks from vehicles, hydraulic lines, or equipment. They are compatible with all fuels and hydrocarbons. (Pages 80-81)
- **Prowler Pools:** Prowler pools provide immediate, large volume containment that is ideal for capturing leaking fuel from punctured tanks, while safely holding a wide variety of hazardous materials. (Page 81)
- **HazMat Pool:** A favorite of hazmat teams and first responders alike, this HazMat Pop-Up Pool can contain a large volume of liquid and has a low sidewall for entry and exit for decontamination. (Page 81)
- **Leak Diverters:** Get instant drip diversion with the Drip Dam leak diverter. This funnel-style fast response tool will channel away liquids from overhead leaks, minimizing the risk of slip-and-fall injuries and contamination. (Page 82)





# ▶ ORIGINAL AND FOLDING DUCK POND MINI BERMS

The Most Popular Portable, Mini Containment Berms!

Duck Ponds and Folding Duck Ponds are mini spill containment berms that are the perfect portable drip pans for leak protection. Easily deploy under leaking vehicles or machines to change various oils or fluids. These mini berms are ideal for use in remote areas.



## ORIGINAL DUCK PONDS



PART NUMBER	DIMENSIONS LxWxH FT. [M.]	WEIGHT LB. [KG.]	SPILL CAPACITY* GAL. [L.]
5622-YE	2 x 2 x 4 in. [0.6 x 0.6 x 10.2 cm.]	6 [2.7]	10 [38]
5623-YE	2 x 3 x 4 in. [0.6 x 0.9 x 10.2 cm.]	6 [2.7]	15 [57]
5624-YE	2 x 4 x 4 in. [0.6 x 1.2 x 10.2 cm.]	7 [3.2]	20 [76]
5633-YE	3 x 3 x 4 in. [0.9 x 0.9 x 10.2 cm.]	7 [3.2]	22.5 [85]
5634-YE	3 x 4 x 4 in. [0.9 x 1.2 x 10.2 cm.]	10 [4.5]	29 [109]
5635-YE	3 x 5 x 4 in. [0.9 x 1.5 x 10.2 cm.]	10 [4.5]	37 [140]
5644-YE	4 x 4 x 4 in. [1.2 x 1.2 x 10.2 cm.]	11 [5]	40 [151]
5645-YE	4 x 5 x 4 in. [1.2 x 1.5 x 10.2 cm.]	11 [5]	49 [185]
5646-YE	4 x 6 x 4 in. [1.2 x 1.8 x 10.2 cm.]	11 [5]	60 [227]
5648-YE	4 x 8 x 4 in. [1.2 x 2.4 x 10.2 cm.]	11 [5]	79 [299]
5655-YE	5 x 5 x 4 in. [1.5 x 1.5 x 10.2 cm.]	13 [5.9]	62 [234]
5656-YE	5 x 6 x 4 in. [1.5 x 1.8 x 10.2 cm.]	14 [6.4]	74 [280]
5666-YE	6 x 6 x 4 in. [1.8 x 1.8 x 10.2 cm.]	16 [7.3]	89 [336]

Regulations: EPA, SPCC, NPDES

## FOLDING DUCK PONDS



PART NUMBER	DIMENSIONS LxWxH FT. [M.]	WEIGHT LB. [KG.]	SPILL CAPACITY* GAL. [L.]
5622-YE-F	2 x 2 x 6 in. [0.6 x 0.6 x 15.2 cm.]	3 [1.3]	14 [53]
5623-YE-F	2 x 3 x 6 in. [0.6 x 0.9 x 15.2 cm.]	4 [1.8]	22 [83]
5624-YE-F	2 x 4 x 6 in. [0.6 x 1.2 x 15.2 cm.]	5 [2.2]	29 [109]
5633-YE-F	3 x 3 x 6 in. [0.9 x 0.9 x 15.2 cm.]	7 [3.2]	33 [124]
5644-YE-F	4 x 4 x 6 in. [1.2 x 1.2 x 15.2 cm.]	8 [3.6]	59 [223]
5646-YE-F	4 x 6 x 6 in. [1.2 x 1.8 x 15.2 cm.]	11 [4.9]	69 [262]
5648-YE-F	4 x 8 x 6 in. [1.2 x 2.4 x 15.2 cm.]	12 [5.4]	79 [299]
5656-YE-F	5 x 6 x 6 in. [1.5 x 1.8 x 15.2 cm.]	13 [5.8]	74 [280]

Regulations: EPA, SPCC, NPDES

## FLEXIBLE UTILITY TRAY




PART NUMBER	DIMENSIONS LxWxH FT. [M.]	WEIGHT LB. [KG.]	SPILL CAPACITY* GAL. [L.]
5611-YE-FUT	1 x 1 x 4.75 in. [0.3 x 0.3 x 10.2 cm.]	1 [0.4]	2 [7.5]
5622-YE-FUT	2 x 2 x 4.75 in. [0.6 x 0.6 x 10.2 cm.]	2 [0.9]	8 [30]
5633-YE-FUT	3 x 3 x 4.75 in. [0.9 x 0.9 x 10.2 cm.]	4 [1.8]	15 [56]
5644-YE-FUT	4 x 4 x 4.75 in. [1.2 x 1.2 x 10.2 cm.]	8 [3.6]	22 [83]



FOLDS FLAT!

\*The berm spill capacity is based on dimensions, low flow rate, a level surface and no displaced volume.

## SPILL PADS WITH GRATES

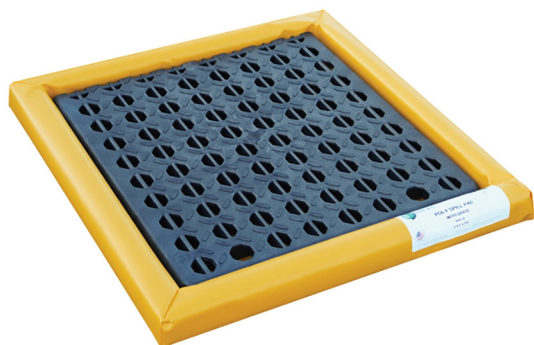

PART NUMBER	DIMENSIONS LxWxH FT. [M.]	WEIGHT LB. [KG.]	SPILL CAPACITY* GAL. [L.]
5600-YE	2x2x2 in. [0.6x0.6x5.1 cm.]	12 [5.4]	2 [7.6]
5610-YE	2x4x2 in. [0.6x1.2x5.1 cm.]	25 [11]	7.5 [28.4]
5620-YE	4x4x2 in. [1.2x1.2x5.1 cm.]	45 [20]	12 [45.4]

Regulations: EPA, SPCC, NPDES

## FILTER SPILL PADS

PART NUMBER	DESCRIPTION	DIMENSIONS LxWxH FT. [M.]	WEIGHT LB. [KG.]	ABSORB CAPACITY GAL. [L.]
5603-YE	Filter Spill Pad	2 x 2 x 3 in. [0.6 x 0.6 x 7.6 cm.]	8 (3.6)	3.5 (13.2)
5605-YE	Filter Spill Pad	2 x 4 x 3 in. [0.6 x 1.2 x 7.6 cm.]	8 (3.6)	7.6 (28.8)
5607-YE	Filter Spill Pad	4 x 4 x 3 in. [1.2 x 1.2 x 7.6 cm.]	10 (4.5)	15.5 (58.7)
REPLACEMENT FILTER BASE AND PADS				
56-22-SPL	Replacement Filter Base, Case of 6	2 x 2 [0.6 x 0.6]	11 (4.9) (per case)	4.8 (18.2) (per case)
56-24-SPL	Replacement Filter Base, Case of 3	2 x 4 [0.6 x 1.2]	11 (4.9) (per case)	4.8 (18) (per case)
56-44-SPL	Replacement Filter Base, Case of 2	4 x 4 [1.2 x 1.2]	13 (5.8) (per case)	7 (26) (per case)
56-38-SOCCLOG	Replacement Filter Pads, Case of 15	2 x 2 [0.6 x 0.6]	15 (6.8) (per case)	18 (71) (per case)

Regulations: EPA, SPCC, NPDES







# ▶ DRIPILLOW DRIP AND LEAK PAD

A Portable Drip Pan Compatible to Catch All Fuels and Hydrocarbon Leaks!

Dripillow spill pads are engineered to be a portable drip-pan to protect from outdoor drips and leaks. They are the solution to absorb any drips from vehicles, hydraulic lines, or other equipment. Equipped with replaceable mesh inserts and are customizable to fit most jobsite applications.

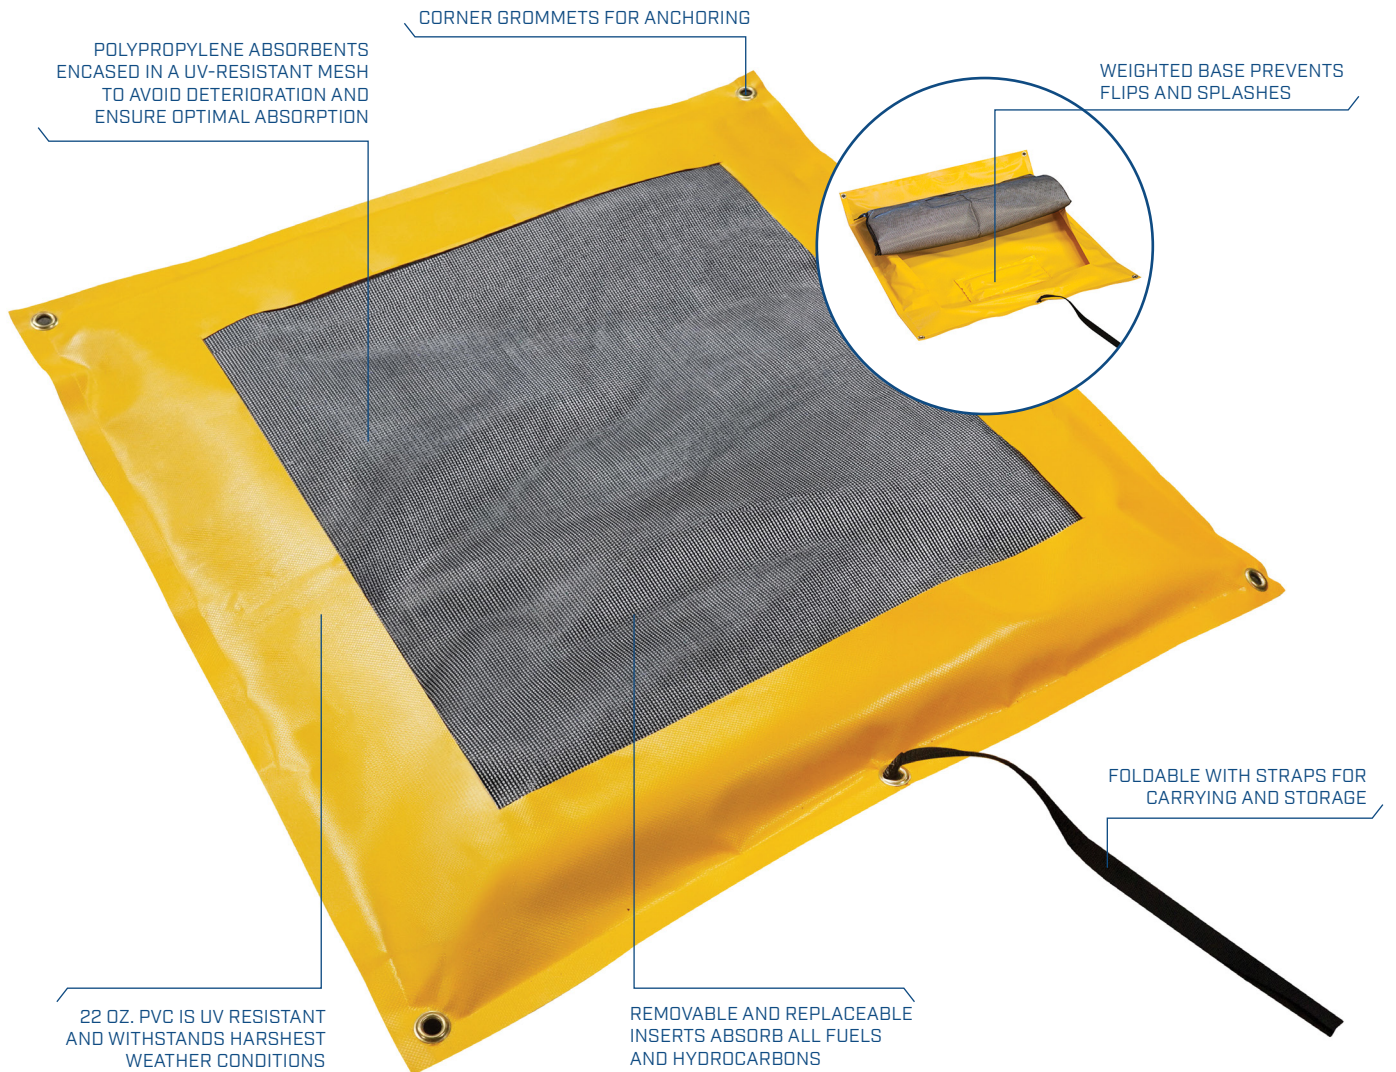


## DRIPILLOWS

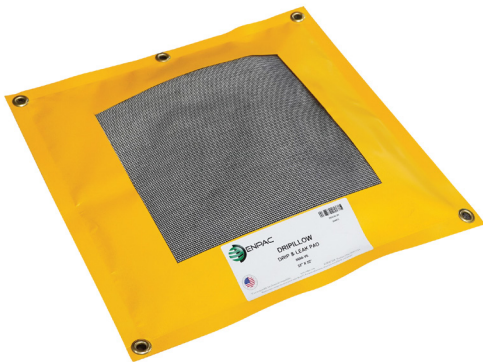

PART NUMBER	DIMENSIONS LxWxH FT. (M.)	WEIGHT LB. (KG.)	SPILL CAPACITY* GAL. (L.)
5650-YE	22 x 22 (51 x 51)	6 (2.7)	1 (3.8)
5660-YE	24 x 36 (61 x 91)	7 (3.1)	2 (7.6)
5670-YE	24 x 54 (61 x 137)	8 (3.6)	3 (11.4)
5680-YE	38 x 42 (96 x 107)	10 (4.5)	4 (15.1)
5690-YE	36 x 36 (91 x 91)	9 (4.1)	4 (15)
5691-YE	36 x 72 (91 x 183)	14 (6.3)	10 (38)
5692-YE	48 x 48 (122 x 122)	18 (8.1)	8 (30)
5693-YE	48 x 60 (122 x 152)	20 (9.1)	12 (45)

Regulations: EPA, SPCC, NPDES

## DRIPILLOW REPLACEMENT PADS

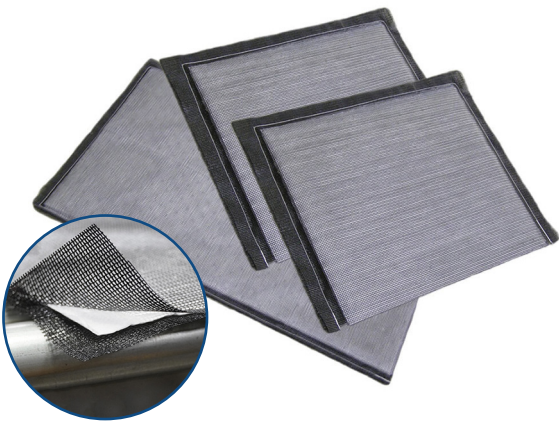

PART NUMBER	FOR USE WITH	SPILL CAPACITY* GAL. (L.)
5655-WH	5650-YE	5 (3.8) (per case)
5665-WH	5660-YE	10 (37) (per case)
5675-WH	5670-YE	15 (56) (per case)
5685-WH	5680-YE	20 (75) (per case)
5690-WH	5690-YE	20 (75) (per case)
5691-WH	5691-YE	50 (189) (per case)
5692-WH	5692-YE	40 (151) (per case)
5693-WH	5693-YE	60 (227) (per case)

## PROWLER POOLS



PART NUMBER	DESCRIPTION	DIMENSIONS TOP DIA. x BASE DIA. x H IN. (CM.)	WEIGHT LB. (KG.)	SPILL CAPACITY GAL. (L.)
5920-YE	20-Gallon	18 x 28 x 13 (46 x 71 x 33)	2 (1)	20 (75.7)
5966-YE	66-Gallon	36 x 48 x 14 (91 x 122 x 35.6)	4 (1.8)	66 (250)
5900-YE	100-Gallon	32 x 48 x 18 (81 x 122 x 46)	4 (1.8)	100 (378.5)
5950-YE	150-Gallon	44 x 60 x 18 (112 x 152 x 46)	5 (2.3)	150 (567.8)
5901-YE	Hazmat Decontamination Pool	74 x 74 x 8 (188 x 188 x 20.3)	5 (2.3)	100 (378.5)
5901-YE-D	Hazmat Decontamination Pool with Drain	74 x 74 x 8 (188 x 188 x 20.3)	5 (2.3)	100 (378.5)

Regulations: EPA, SPCC, NPDES

\*The spill capacity is based on dimensions, low flow rate, a level surface and no displaced volume.



## DRIP DAM LEAK DIVERTER

PART NUMBER	DIMENSIONS LxWxH FT. [M.]	WEIGHT LB. [KG.]
460303-YE	3 x 3 (0.9 x 0.9)	1 (0.4)
460306-YE	3 x 6 (0.9 x 1.8)	1 (0.4)
460310-YE	3 x 10 (0.9 x 3)	2 (0.9)
460505-YE	5 x 5 (1.5 x 1.5)	1 (0.4)
460606-YE	6 x 6 (1.8 x 1.8)	2 (0.9)
460610-YE	6 x 10 (1.8 x 3)	4 (1.8)
460612-YE	6 x 12 (1.8 x 3.7)	7 (3.1)
460707-YE	7 x 7 (2.1 x 2.1)	2 (0.9)
461010-YE	10 x 10 (3 x 3)	5 (2.2)
461012-YE	10 x 12 (3 x 3.7)	6 (2.7)
461212-YE	12 x 12 (3.7 x 3.7)	11 (4.9)
461220-YE	12 x 20 (3.7 x 6.1)	11 (4.9)
461818-YE	18 x 18 (5.5 x 5.5)	13 (5.8)
462424-YE	24 x 24 (7.3 x 7.3)	26 (11)



## DROP CEILING LEAK DIVERTER

PART NUMBER	DIMENSIONS LxWxH FT. [M.]	WEIGHT LB. [KG.]
4622-YE-DC	2 x 2 (0.6 x 0.6)	2 (0.9)
4624-YE-DC	2 x 4 (0.6 x 1.2)	4 (1.8)



## ROUND DRIP DAM LEAK DIVERTER

PART NUMBER	DIMENSIONS LxWxH IN. [CM.]	WEIGHT LB. [KG.]
46R18-YE	18 x 18 (45.7 x 45.7)	1 (0.5)




## HOSE AND FITTINGS

PART NUMBER	DIMENSIONS LxWxH FT. [M.]	WEIGHT LB. [KG.]
46-HOSE-10	10 x 0.75 in. (3.1 x 1.9 cm.)	5 (2.3)
46-HOSE-25	25 x 0.75 in. (7.6 x 1.9 cm.)	10 (4.6)



# STORMWATER

Filtering stormwater runoff and removing pollutants is a critical component of any spill prevention plan. ENPAC® makes it easy to filter water and contain contaminants with its wide variety of innovative products.

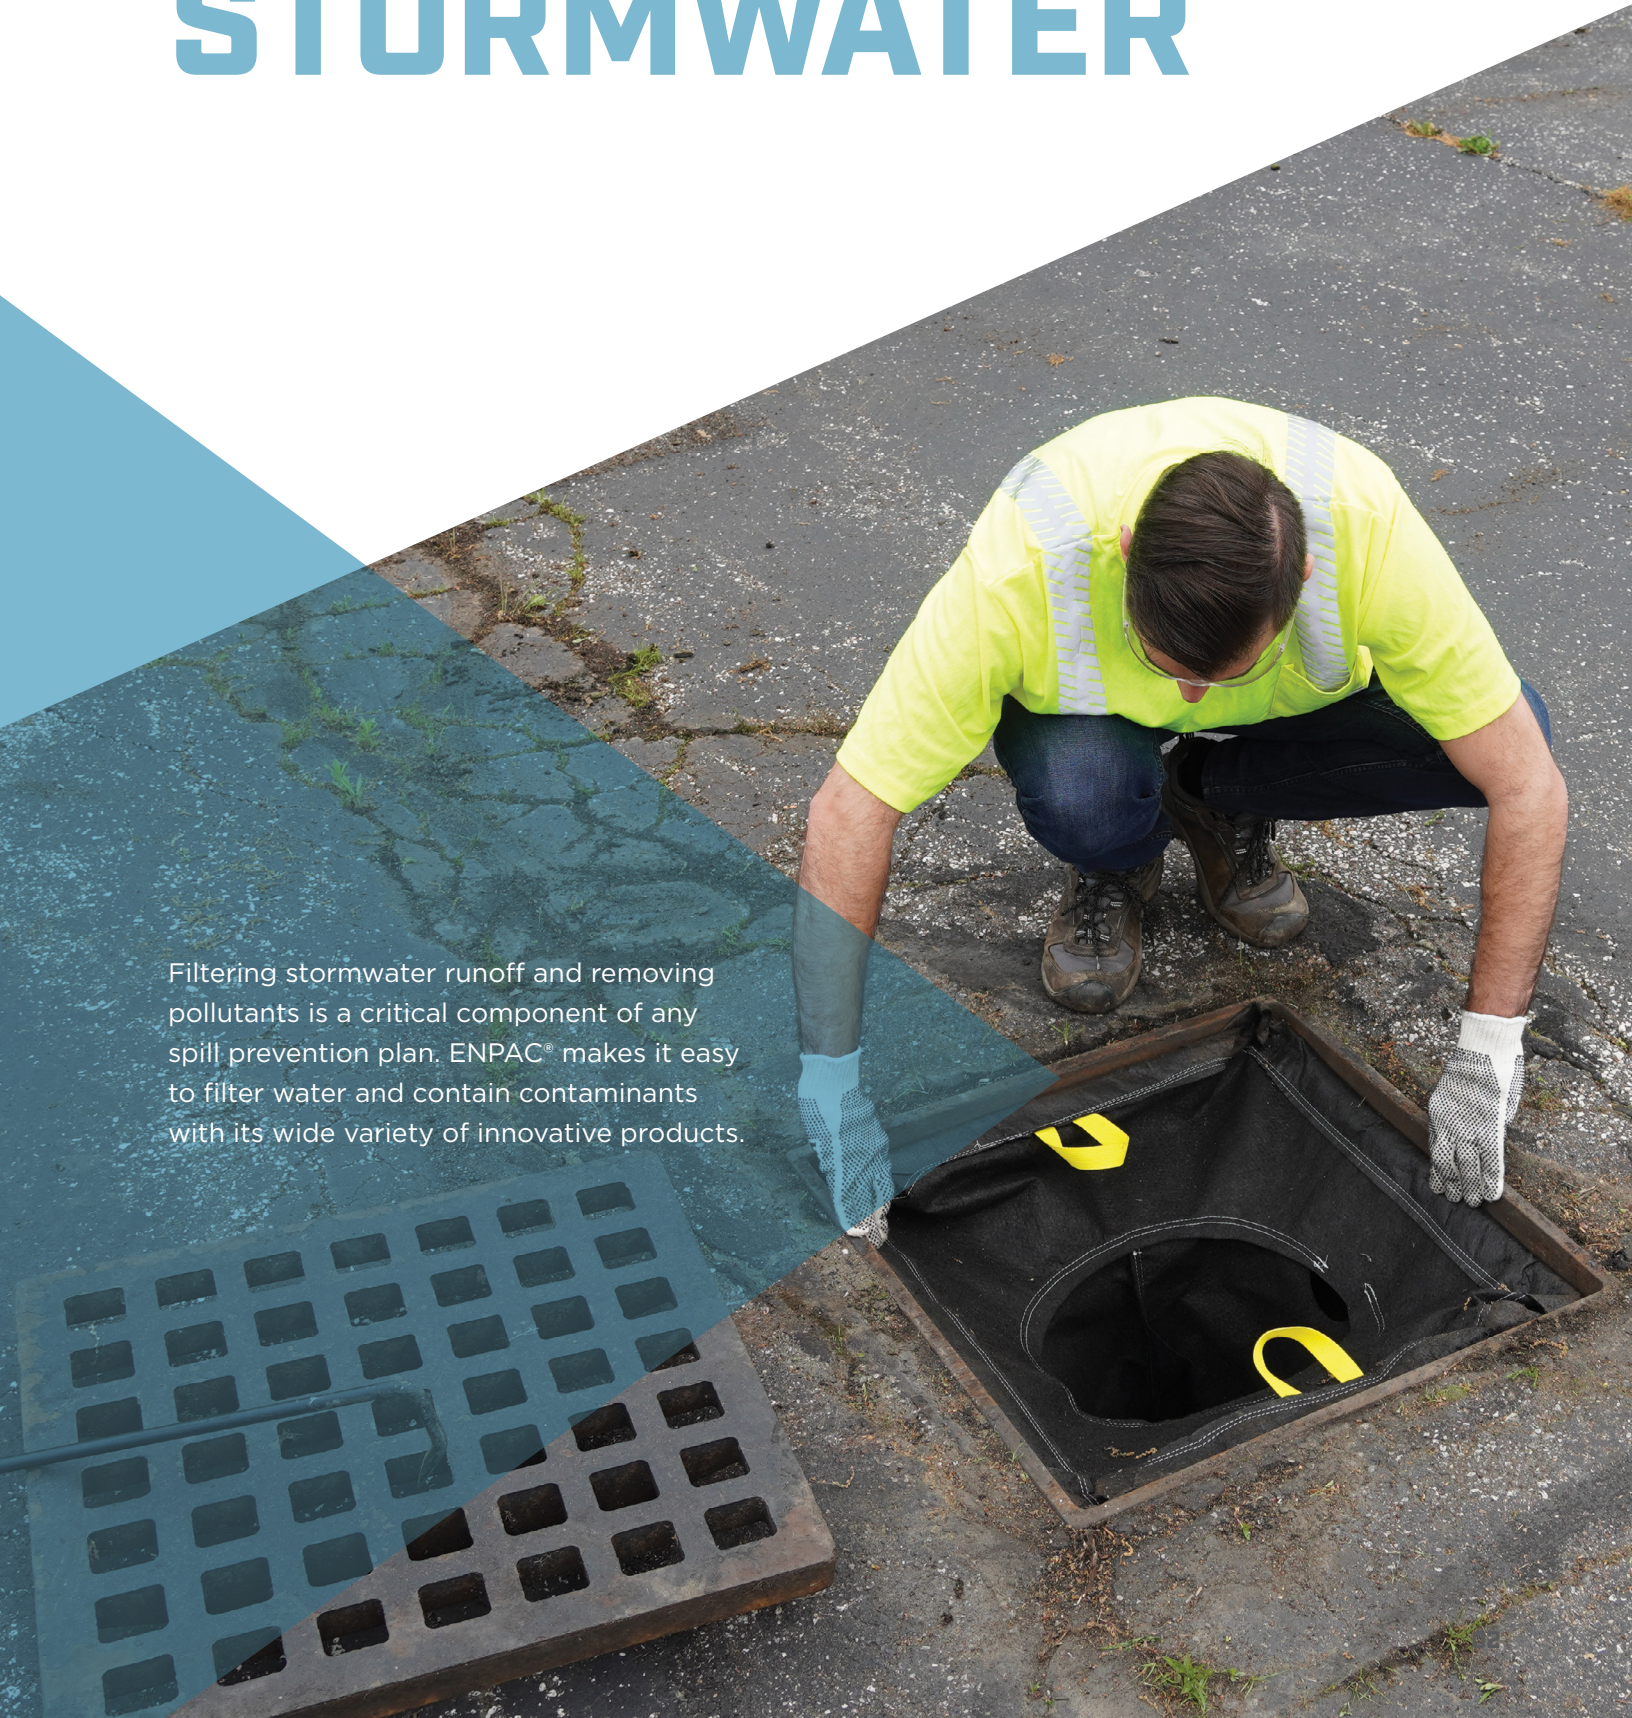



# ▶ STORMWATER

ENPAC® stormwater products are designed to prevent water pollution regulated by the EPA. Storm Sentinel® Catch Basin Inserts and Curb Inlets are the ideal solution to filter contaminated sediment from stormwater runoff. There are many different styles to choose from based on drain shape, size, overflow and oil absorption.

## ADJUSTABLE FRAME

Framed catch basin inserts easily adjust to the drain size required and are self-supporting below the grate. Offered as a round, rectangular, bag, and/or cone style. (Pages 86-88)



ADJUSTABLE FRAME



FRAMELESS



CURB INLETS

## FRAMELESS

The frameless model uses the weight of the grate to hold it in place. This “one size fits all” model can be used for multiple sized drains, round or rectangular. For a clean look, trim excess material once the grate is in place. (Page 89)

## CURB INLETS

Specifically designed for drains that are built into a curb. Combine with a catch basin insert for maximum efficiency! (Page 91)

## OPTIONS:

**Standard:** ENPAC®’s standard option is meant to catch sediment and debris. This model comes with overflow holes, also known as bypass ports, to prevent ponding in the event of a high-flow storm.

**No Overflow:** If high-flow or ponding is not a concern, consider the no-overflow option which is the standard model without the overflow holes.

**Oil Absorbing:** This option takes the standard model to the next level with the addition of oil absorbing media to prevent oils and hydrocarbons from getting into the storm drain.

**Weighted Bags:** Weighted bags are offered for the Curb Inlet models to ensure no movement and maximum efficiency.

# REGULATIONS

## **EPA 40 CFR 122.26 STORMWATER REGULATIONS, NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM (NPDES):**

The NPDES permit program controls water pollution by regulating point sources and non-point sources that discharge pollutants into United States waters. These regulations are a key component of EPA's Clean Water Act. The goal is to protect the quality of waterways by reducing the discharge of sediment, oil and chemicals into storm drains, surface and ground waters.

NPDES requires Minimum Control Measures to be put into place by activities in affected Urbanized Areas (UA). Visit [www.epa.gov/owm](http://www.epa.gov/owm) (US EPA Office of Wastewater Management), Appendix 6 to determine particular affected places. This program includes the development and implementation of the Stormwater Pollution Prevention Plan (SWPPP). The SWPPP identifies: Potential Sources of Pollution and Exposed Materials; a history of past spills and leaks; BMPs; Non-Structural controls (Good Housekeeping Practices, Spill Prevention and Response); Structural controls such as Containment including Pollution Incident Prevention Plans (PIPP) and Spill Prevention, Control, and Countermeasures (SPCC) plans.






# ▶ ADJUSTABLE FRAME STORM SENTINEL® CATCH BASIN INSERTS

Position. Adjust. Comply.

Storm Sentinel® Catch Basin Inserts are the ideal products for preventing harmful pollutants from washing into storm drains. This framed model comes complete with an adjustable steel wire frame for simple installation and removal. Standard versions feature overflow bypass ports for high-flow storm events, preventing storm water backup around drains. Reusable until product no longer maintains adequate water flow. US Patent No. 10,384,155.

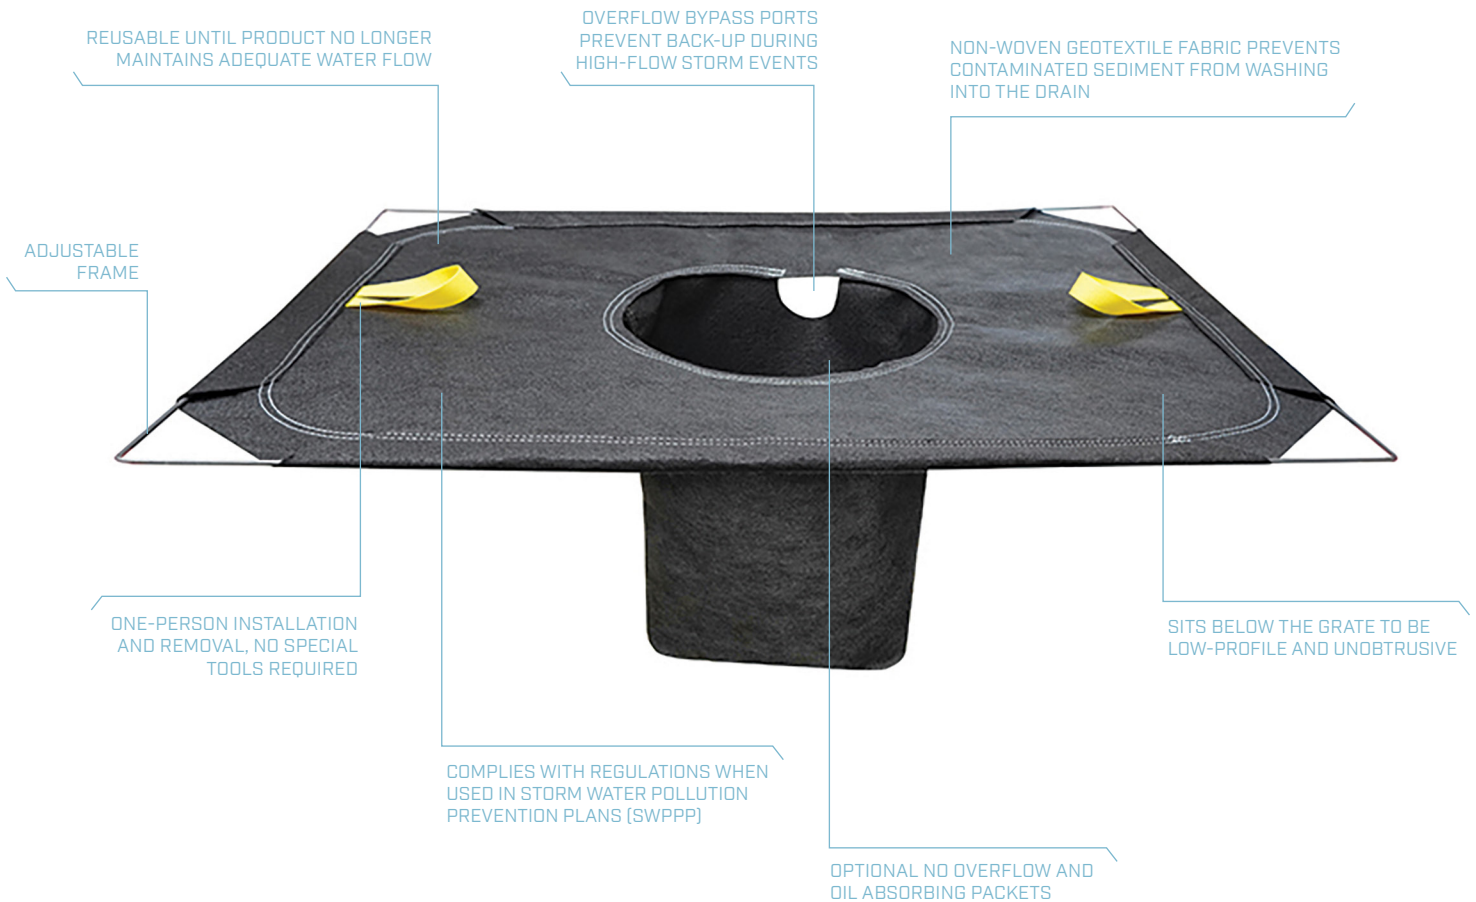

## ADJUSTABLE FRAME RECTANGULAR, CONE STYLE



RECTANGULAR, CONE STYLE	
Cone Depth	18 in. (45 cm.)
Weight	2 lbs. (0.9 kg.)
Flow Rate	90 gal. (340.69 L.) per min. per sqft.
Load Capacity	40 lbs (18.1 kg.)
Patent	US Patent No. 10,384,155

PART NUMBER	DESCRIPTION	DIMENSIONS (LxW) IN. (CM.)		ABSORB CAPACITY GAL. (L.)
		MIN.	MAX.	
4341	Standard	16 x 20 (41 x 51)	28 x 36 (71 x 97)	N/A
4341-NO	No Overflow	16 x 20 (41 x 51)	28 x 36 (71 x 97)	N/A
4341-IB	With Oil-Absorbing Packets	16 x 20 (41 x 51)	28 x 36 (71 x 97)	0.23 (0.87)
4343	Standard	25 x 25 (64 x 64)	42 x 42 (107 x 107)	N/A
4343-NO	No Overflow	25 x 25 (64 x 64)	42 x 42 (107 x 107)	N/A
4343-IB	With Oil-Absorbing Packets	25 x 25 (64 x 64)	42 x 42 (107 x 107)	0.23 (0.87)

Regulations: 40 CFR 122.26, EPA, SPCC, NPDES

## ADJUSTABLE FRAME INSTALL



1. Remove catch basin grate and any dirt and debris from the basin edges.



2. Place the filter into recess and adjust the wire frame to fit the outside edges.



3. Once the insert is properly positioned on the lip of the catch basin, reinstall the grate.



**TO REMOVE:** Simply remove grate and lift the Storm Sentinel® out by the handles.

## ADJUSTABLE FRAME ROUND, CONE STYLE



### ROUND, CONE STYLE

Cone Depth	18 in. (45 cm.)
Weight	2 lbs. (0.9 kg.)
Flow Rate	90 gal. (340.69 L.) per min. per sqft.
Load Capacity	40 lbs (18.1 kg.)
Patent	US Patent No. 10,384,155

PART NUMBER	DESCRIPTION	DIAMETER IN. (CM.)		ABSORB CAPACITY GAL. (L.)
		MIN.	MAX.	
4340-CONE	Standard	25 (63.5)	28 (71)	N/A
4340-CONE-NO	No Overflow	25 (63.5)	28 (71)	N/A
4340-CONE-IB	With Oil-Absorbing Packets	25 (63.5)	28 (71)	0.23 (0.87)
4340-22-CONE	Standard	22 (56)	24 (61)	N/A
4340-22-CONE-NO	No Overflow	22 (56)	24 (61)	N/A
4340-22-CONE-IB	With Oil-Absorbing Packets	22 (56)	24 (61)	0.23 (0.87)

Regulations: 40 CFR 122.26, EPA, SPCC, NPDES

## ADJUSTABLE FRAME ROUND, BAG STYLE



### ROUND, BAG STYLE

Bag Depth	14 in. (35.6 cm.)
Weight	2 lbs. (0.9 kg.)
Flow Rate	90 gal. (340.69 L.) per min. per sqft.
Load Capacity	40 lbs. (18.1 kg.)
Patent	US Patent No. 10,384,155

PART NUMBER	DESCRIPTION	DIAMETER IN. (CM.)		ABSORB CAPACITY GAL. (L.)
		MIN.	MAX.	
4340	Standard	25 (63.5)	28 (71)	N/A
4340-NO	No Overflow	25 (63.5)	28 (71)	N/A
4340-IB	With Oil-Absorbing Packets	25 (63.5)	28 (71)	0.23 (0.87)
4340-22	Standard	22 (56)	24 (61)	N/A
4343-22-NO	No Overflow	22 (56)	24 (61)	N/A
4343-22-IB	With Oil-Absorbing Packets	22 (56)	24 (61)	0.23 (0.87)

Regulations: 40 CFR 122.26, EPA, SPCC, NPDES



## FRAMELESS CATCH BASIN INSERTS NON-WOVEN, CONE STYLE



NON-WOVEN, CONE STYLE	
Cone Depth	18 in. (45 cm.)
Weight	2 lbs. (0.9 kg.)
Flow Rate	90 gal. (340.69 L.) per min. per sqft.
Load Capacity	40 lbs. (18.1 kg.)

PART NUMBER	DESCRIPTION	DIMENSIONS [LxW] IN. [CM.]	ABSORB CAPACITY GAL. [L.]
4320	Standard	36 x 48 (91 x 122)	N/A
4320-NO	No Overflow	36 x 48 (91 x 122)	N/A
4320-IB	With Oil-Absorbing Packets	36 x 48 (91 x 122)	0.23 (0.87)
4326	Standard	60 x 60 (152 x 152)	N/A
4326-NO	No Overflow	60 x 60 (152 x 152)	N/A
4326-IB	With Oil-Absorbing Packets	60 x 60 (152 x 152)	0.23 (0.87)

Regulations: 40 CFR 122.26, EPA, SPCC, NPDES

## STORM SENTINEL<sup>®</sup> FRAMELESS INSTALL




1. Safely remove the grate.



2. Insert the Storm Sentinel<sup>®</sup> into the recess.



3. Hold the fabric in place until the grate is returned.



4. Trim the excess fabric with a knife or scissors if desired.

## FRAMELESS CATCH BASIN INSERTS WOVEN SILT BAG



WOVEN SILT BAG			
Bag Depth	24 in. (61 cm.)		
PART NUMBER	DIMENSIONS (LxW) IN. (CM.)	WEIGHT LB. (KG.)	FLOW RATE GPM/SF (L.)
4370-22	24 x 24 (61 x 61)	3.2 (1.5)	189 (715)
4370-23	24 x 36 (61 x 91)	3.6 (1.6)	251 (950)
4370-24	24 x 48 (61 x 122)	3.8 (1.7)	309 (1,169)
4370-33	36 x 36 (91 x 91)	3.9 (1.8)	355 (1,343)

Regulations: 40 CFR 122.26, EPA, SPCC, NPDES

## GRATE GUARDIAN, ABOVE-GRATE FILTER OIL-ABSORBING SPILLTRATION®



PART NUMBER	DIMENSIONS (LxW) IN. (CM.)	FOR DRAINS (LxW) IN. (CM.)	WEIGHT LB. (KG.)	ABSORB CAPACITY GAL. (L.)
43-3030-GGH	30 x 30 (76.2 x 76.2)	24 x 24 (61 x 61)	5 (2.2)	2 (7.6)
43-3042-GGH	30 x 42 (76.2 x 106.7)	24 x 36 (61 x 91.5)	6 (2.7)	2.75 (10.4)
43-3054-GGH	30 x 54 (76.2 x 137.2)	24 x 48 (61 x 106.7)	7 (3.2)	3.5 (13.3)
43-4848-GGH	48 x 48 (122 x 122)	42 x 42 (106.7 x 106.7)	9 (4.1)	5 (18.9)

Regulations: 40 CFR 122.26, EPA, SPCC, NPDES

## GRATE GUARDIAN, ABOVE-GRATE FILTER REGULAR



PART NUMBER	DIMENSIONS (LxW) IN. (CM.)	FOR DRAINS (LxW) IN. (CM.)	WEIGHT LB. (KG.)
43-24-GG	30 x 30 (76 x 76)	24 x 24 (61 x 61)	2 (0.9)
43-36-GG	36 x 36 (91.5 x 91.5)	42 x 42 (106 x 106)	2 (0.9)

Regulations: EPA 40 CFR 122.26, SPCC and NPDES

## STORM SENTINEL® CURB BASIN INSERT



4320-CURB	
Top Apron Dimensions (LxW)	36 in. x 48 in. (91 cm. x 122 cm.)
Cone Depth	18 in. (45 cm.)
Curb Coil Diamete	5 in. (12.7 cm.)
Curb Coil Length	48 in. (121.9 cm.)
Weight	7 lbs. (3.2 kg.)
Load Capacity	40 lbs. (18 kg.)
Flow Rate	90 gal. (340.69 L.) per min. per sqft.

Regulations: 40 CFR 122.26, EPA, SPCC, NPDES

## STORM SENTINEL® CURB INLET FILTER



ADD THE 4345-BX2 FOR WEIGHTED PROTECTION!

PART NUMBER	LENGTH IN. (CM.)	DIAMETER IN. (CM.)	WEIGHT LB. (KG.)	FLOW RATE GPM/SF (L.)	ABSORB CAPACITY GAL. (L.)
4346	48 (121.9)	5 (12.7)	5 (2.3)	90 (340.69)	N/A
4346-1B	48 (121.9)	5 (12.7)	5 (2.3)	90 (340.69)	0.28 (1.05)

Regulations: EPA 40 CFR 122.26, SPCC and NPDES

## BOSS DEWATERING FILTER BAG



PART NUMBER	DIMENSIONS FT. (M.)	NECK SIZE IN. (CM.)	WEIGHT LB. (KG.)	FLOW RATE GPM/SF (L.)
430303	3 x 3 (0.9 x 0.9)	4 in. (10 cm.)	1 (0.5)	90 (340.69)
430606	6 x 6 (1.8 x 1.8)	7 in. (18 cm.)	2.2 (1)	90 (340.69)
431212	12 x 12 (3.6 x 3.6)	9.5 in. (24 cm.)	5 (2.2)	90 (340.69)

Regulations: EPA 40 122.26, SPCC and NPDES

## PIPE FILTER SOCK




PART NUMBER	LENGTH FT. (M.)	DIAMETER IN. (CM.)	WEIGHT LB. (KG.)
43-85-PS	5 (1.5)	8 (20.3)	1 (0.5)
43-165-PS	5 (1.5)	16 (40.6)	1 (0.5)
43-125-PS	5 (1.5)	12 (30.5)	1 (0.5)



## DRAIN COVERS

Open drains are most susceptible to costly and dangerous outdoor spills. These urethane drain covers are chemically resistant and can be deployed quickly to seal the drain completely.

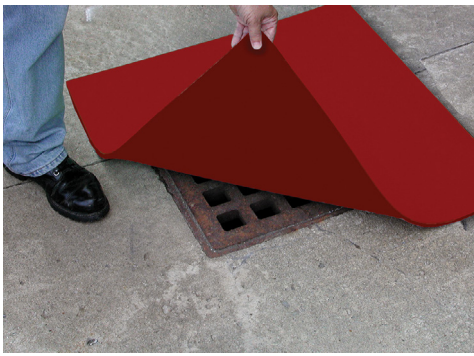

### SQUARE DRAIN COVERS

PART NUMBER	DIMENSIONS LxWxH IN. (CM.)	WEIGHT LB. (KG.)
4318-SP	18 x 18 x 0.25 (46 x 46 x 0.63)	4 (1.8)
4324-SP	24 x 24 x 0.25 (61 x 61 x 0.63)	5 (2.2)
4336-SP	36 x 36 x 0.25 (91 x 91 x 0.63)	13 (6)
4342-SP	42 x 42 x 0.25 (106 x 106 x 0.63)	14 (6.3)
4348-SP	48 x 48 x 0.25 (122 x 122 x 0.63)	23 (10.5)
4354-SP	54 x 54 x 0.25 (137 x 137 x 0.63)	28 (12.7)
43-3660-SP	36 x 60 x 0.25 (91 x 152 x 0.63)	19 (8.6)

### ROUND DRAIN COVERS

PART NUMBER	DIAMETER IN. (CM.)	WEIGHT LB. (KG.)
4312R-SP	12 (30)	2 (0.9)
4320R-SP	20 (51)	7 (3.1)
4330R-SP	30 (76)	11 (4.9)
4342R-SP	42 (107)	14 (6.3)

Regulations: EPA, SPCC and NPDES


## WATER-FILLED DIVERTER

Create a diversion in minutes by filling the tube with water using a standard garden hose to build a berm barrier where it's required.



PART NUMBER	DIMENSION L x DIA. FT. (M.)	WEIGHT LB. (KG.)
25-65-YE-WT	5 x 6 in. (1.5 x 15.2 cm.)	2 (0.9)
25-610-YE-WT	10 x 6 in. (3.1 x 15.2 cm.)	3 (1.3)
25-625-YE-WT	25 x 6 in. (7.6 x 15.2 cm.)	5 (2.25)





Spills are inevitable, but preparation is key. Having the appropriate spill response equipment on hand accelerates the cleanup process and reduces the time your employees are at risk. For just about any spill, ENPAC® has a suitable kit.

# SPILL KITS



# ► SPILL KITS

Every situation and spill requires a unique solution. ENPAC® covers it all with a wide variety of spill kits for every application, small or large.

## WHAT TYPE OF CONTAINER DO YOU NEED?

**Drums:** Available in many different sizes and forms. Choose between sizes ranging from 5 gallons up to 95 gallons, rated and non-rated, and even with or without wheels. (Pages 96-101)

**Totes:** Big spills require big kits. ENPAC®'s Large and Extra Large tote spill kits are the ideal solution. (Page 102)

**Bags:** From small hand carried bags up to large duffel bags, store behind a vehicle seat or on a shelf where it is easily accessible in the event of a spill. (Page 103)

**Truck Mount Kit:** A spill can happen at any time in any place. Consider a container that can be mounted to your long-haul truck in the event of a spill on the road. (Page 104)

**Wall-Mounts:** Wall-mount lockers are highly visible and perfect for keeping your spill kit off the floor and out of the way. (Page 108)





# SORBENT QUICK REFERENCE GUIDE

## GETTING THE RIGHT PRODUCT FOR YOUR NEEDS

**OIL ONLY** White and widely used for oils and hydrocarbons (available in meltblown and bonded). Oil only sorbents provide superior water resistance and can absorb up to 25 times their weight. Ideal for absorbing oil off water or maintenance and repair when needing to avoid soaking up water and water-based fluids.

**UNIVERSAL** These highly versatile sorbents are gray and used in most all industries, bonded for added strength and durability. Universal sorbents are a great choice for absorbing a wide range of fluids. These will absorb water and oil-based liquids.

**AGGRESSIVE** Also known as Hazmat sorbents, can range in a variety of colors with yellow being the most standard for visible hazardous material recognition. Aggressive sorbents are best used for the clean-up of unknown, toxic, flammable, corrosive and chemical substance spills.

### OSHA REGULATIONS:

#### 29 CFR 1910.120

Hazardous Waste Operations and Emergency Response: Suitable quantities of proper absorbents shall be kept available and used in areas where spills, leaks or ruptures may occur.

#### 29 CFR 1910.22

Workplace Housekeeping: Every workroom floor shall be maintained in a clean and, so far as possible, a dry condition.

#### 29 CFR 1910.1450

Laboratories must have containment and clean-up materials for spills and leaks to reduce occupational exposure to hazardous chemicals.





# DRUM SPILL KITS

## 5-GALLON SAFETY PAIL

### 5-GALLON NON-RATED

Dimensions 13 in. x 13 in. x 17 in.  
[33 cm. x 33 cm. x 43 cm.]

Weight 10 lbs. (4.5 kg.)

Absorb Capacity 5 gal. (18.9 L.)

TYPE	PART NUMBER	REFILL KIT
Universal	13-5PKU*	N/A
Oil Only	13-5PKD	N/A

\*Item Shown



### KIT INCLUDES:

- (1) 5-Gallon Safety Pail
- (1) Quart Bag ENSORB®
- (10) Pads
- (4) Medium Socks
- (1) Disposal Bag and Tie
- (1) Pair Gloves
- (1) Goggle
- (1) Emergency Response Guide
- (1) Instruction Sheet and SDS

## 10-GALLON DRUM

### 10-GALLON NON-RATED

Dimensions 16 in. x 16 in. x 19 in.  
[40.6 cm. x 40.6 cm. x 48.2 cm.]

Weight 10 lbs. (4.5 kg.)

Absorb Capacity 4 gal. (15.1 L.)

TYPE	PART NUMBER	REFILL KIT			
Universal	13-10-U*	N/A			
Aggressive	13-10-A	N/A <tr> <td>Oil Only</td> <td>13-10-D</td> <td>N/A</td> </tr>	Oil Only	13-10-D	N/A
Oil Only	13-10-D	N/A			

\*Item Shown



### KIT INCLUDES:

- (1) 10-Gallon Drum
- (1) Quart Bag ENSORB®
- (10) Pads
- (2) Medium Socks
- (1) Disposal Bag and Tie
- (1) Pair Gloves
- (1) Goggle
- (1) Emergency Response Guide
- (1) Instruction Sheet and SDS

## 20-GALLON SALVAGE DRUM

### 20-GALLON RATED

Dimensions 24 in. x 24 in. x 19 in.  
[60.9 cm. x 60.9 cm. x 48.2 cm.]

Weight 20 lbs. (9.1 kg.)

Absorb Capacity 11 gal. (41.6 L.)

Load Capacity 166 lbs. (75.3 kg.)

TYPE	PART NUMBER	REFILL KIT
Universal	1320-YE	1320-RF
Aggressive	1321-YE*	1321-RF
Oil Only	1322-YE	1322-RF

\*Item Shown



### KIT INCLUDES:

- (1) 20-Gallon Salvage Drum
- (20) Pads
- (1) Large Sock
- (6) Medium Socks
- (1) Pack Wipers
- (1) Gallon Jug ENSORB®
- (2) Disposal Bags and Ties
- (1) Pair Gloves
- (1) Goggle
- (1) Emergency Response Guidebook
- (1) Instruction Sheet and SDS



## 30-GALLON SALVAGE DRUM

### 30-GALLON RATED

Dimensions 24 in. x 24 in. x 30.5 in.  
[60.9 cm. x 60.9 cm. x 77.4 cm.]

Weight 27 lbs. [12.3 kg.]

Absorb Capacity 23 gal. [87.1 L.]

Load Capacity 220 lbs. [99.7 kg.]

TYPE	PART NUMBER	REFILL KIT
Universal	1330-YE	1330-RF
Aggressive	1331-YE	1331-RF
Oil Only	1332-YE*	1332-RF

\*Item Shown



#### KIT INCLUDES:

- (1) 30-Gallon Salvage Drum
- (50) Pads
- (2) Large Socks
- (6) Medium Socks
- (1) Pack Wipers
- (1) Gallon Jug ENSORB®
- (2) Disposal Bags and Ties
- (1) Pair Gloves
- (1) Goggle
- (1) Emergency Response Guidebook
- (1) Instruction Sheet and SDS

## 50-GALLON WHEELED SALVAGE DRUM

### 50-GALLON WHEELED RATED

Dimensions 24 in. x 29 in. x 46 in.  
[60.9 cm. x 73.6 cm. x 116.8 cm.]

Weight 67 lbs. [30.4 kg.]

Absorb Capacity 31 gal. [117.3 L.]

Load Capacity 275 lbs. [124.7 kg.]

TYPE	PART NUMBER	REFILL KIT
Universal	1350-YE*	1350-RF
Aggressive	1351-YE	1351-RF
Oil Only	1352-YE	1352-RF

\*Item Shown



#### KIT INCLUDES:

- (1) 50-Gallon Wheeled Salvage Drum
- (40) Pads
- (5) Large Socks
- (10) Medium Socks
- (1) Pack Wipers
- (1) Gallon Jug ENSORB®
- (4) Disposal Bags and Ties
- (2) Pair Gloves
- (2) Goggles
- (1) Emergency Response Guidebook
- (1) Instruction Sheet and SDS

## 55-GALLON DRUM

### 55-GALLON RATED LAB PACK

Dimensions 25 in. x 24 in. x 37.5 in.  
[64 cm. x 61 cm. x 95 cm.]

Weight 43 lbs. [20 kg.]

Absorb Capacity 48 gal. [181.7 L.]

TYPE	PART NUMBER	REFILL KIT
Universal	13-55-U	13-55-U-RF
Aggressive	13-55-A*	13-55-A-RF
Oil Only	13-55-O	13-55-O-RF

\*Item Shown



#### KIT INCLUDES:

- (1) 55-Gallon Drum with Lever-Lock Lid
- (100) Pads
- (10) Medium Socks
- (4) Large Pillows
- (1) Gallon Jug ENSORB®
- (6) Disposal Bags and Ties
- (1) Pair Gloves
- (1) Goggle
- (1) Emergency Response Guidebook
- (1) Instruction Sheet and SDS

## 65-GALLON SALVAGE DRUM

### 65-GALLON RATED

Dimensions	27 in. x 27 in. x 37.5 in. (68.6 cm. x 68.6 cm. x 95.2 cm.)
Weight	74 lbs. (33.6 kg.)
Absorb Capacity	41 gal. (155.2 L.)
Load Capacity	440 lbs. (199.5 kg.)

TYPE	PART NUMBER	REFILL KIT
Universal	1360-YE	1360-RF
Aggressive	1361-YE	1361-RF
Oil Only	1362-YE*	1362-RF

\*Item Shown



#### KIT INCLUDES:

- (1) 65-Gallon Salvage Drum
- (50) Pads
- (8) Large Socks
- (12) Medium Socks
- (1) Pack Wipers
- (1) Gallon Jug ENSORB®
- (4) Disposal Bags and Ties
- (2) Pair Gloves
- (2) Goggles
- (1) Emergency Response Guidebook
- (1) Instruction Sheet and SDS

## 95-GALLON SALVAGE DRUM

### 95-GALLON RATED

Dimensions	32 in. x 32 in. x 41.25 in. (81.3 cm. x 81.3 cm. x 104.7 cm.)
Weight	84 lbs. (38.1 kg.)
Absorb Capacity	62 gal. (234.6 L.)
Load Capacity	650 lbs. (294.8 kg.)

TYPE	PART NUMBER	REFILL KIT
Universal	1390-YE*	1390-RF
Aggressive	1391-YE	1391-RF
Oil Only	1392-YE	1392-RF

\*Item Shown



#### KIT INCLUDES:

- (1) 95-Gallon Salvage Drum
- (100) Pads
- (10) Large Socks
- (16) Medium Socks
- (1) Pack Wipers
- (1) Gallon Jug ENSORB®
- (5) Disposal Bags and Ties
- (2) Pair Gloves
- (2) Goggles
- (1) Emergency Response Guidebook
- (1) Instruction Sheet and SDS

## 95-GALLON ENVIROSALV SALVAGE DRUM

### 95-GALLON ENVIROSALV RATED

Dimensions	32.5 in. x 32.5 in. x 43.5 in. (82.6 cm. x 82.6 cm. x 110.5 cm.)
Weight	93 lbs. (42.1 kg.)
Absorb Capacity	62 gal. (234.6 L.)
Load Capacity	650 lbs. (294.8 kg.)

TYPE	PART NUMBER	REFILL KIT
Universal	1393-YE	1393-RF
Aggressive	1394-YE*	1394-RF
Oil Only	1395-YE	1395-RF

\*Item Shown



#### KIT INCLUDES:

- (1) 95-Gallon EnviroSalv Salvage Drum
- (1) Lock Down Security Kit
- (100) Pads
- (10) Large Socks
- (16) Medium Socks
- (1) Pack Wipers
- (1) Gallon Jug ENSORB®
- (5) Disposal Bags and Ties
- (2) Pair Gloves
- (2) Goggles
- (1) Emergency Response Guidebook
- (1) Instruction Sheet and SDS

## 95-GALLON WHEELED SALVAGE DRUM

### 95-GALLON WHEELED RATED

Dimensions	31.3 in. x 35.38 in. x 47.5 in. (79.5 cm. x 89.8 cm. x 120.6 cm.)
Weight	98 lbs. (44.5 kg.)
Absorb Capacity	62 gal. (234.6 L.)
Load Capacity	250 lbs. (113.9 kg.)

TYPE	PART NUMBER	REFILL KIT
Universal	1397-YE	1397-RF
Aggressive	1398-YE	1398-RF
Oil Only	1399-YE*	1399-RF

\*Item Shown



#### KIT INCLUDES:

- (1) 95-Gallon Wheeled Salvage Drum
- (100) Pads
- (10) Large Socks
- (16) Medium Socks
- (1) Pack Wipers
- (1) Gallon Jug ENSORB®
- (5) Disposal Bags and Ties
- (2) Pair Gloves
- (2) Goggles
- (1) Emergency Response Guidebook
- (1) Instruction Sheet and SDS

## 50-GALLON WHEELED SPILLPACK

### 50-GALLON WHEELED NON-RATED

Dimensions	24 in. x 29 in. x 46 in. (60.9 cm. x 73.6 cm. x 116.8 cm.)
Weight	59 lbs. (27 kg.)
Absorb Capacity	21 gal. (79.4 L.)

TYPE	PART NUMBER	REFILL KIT
Universal	1450-YE*	1397-RF
Aggressive	1451-YE	1398-RF
Oil Only	1452-YE	1399-RF

\*Item Shown



#### KIT INCLUDES:

- (1) 50-Gallon Wheeled SpillPack
- (40) Pads
- (5) Large Socks
- (1) Pack Wipers
- (1) Gallon Jug ENSORB®
- (4) Disposal Bags and Ties
- (2) Pair Gloves
- (2) Goggles
- (1) Emergency Response Guidebook
- (1) Instruction Sheet and SDS

## 65-GALLON SPILLPACK

### 65-GALLON NON-RATED

Dimensions	27.75 in. x 27.75 in. x 37.5 in. (70.5 cm. x 70.5 cm. x 95.2 cm.)
Weight	46 lbs. (21 kg.)
Absorb Capacity	35 gal. (132.4 L.)

TYPE	PART NUMBER	REFILL KIT
Universal	1460-YE	1460-RF
Aggressive	1461-YE*	1461-RF
Oil Only	1462-YE	1462-RF

\*Item Shown



#### KIT INCLUDES:

- (1) 65-Gallon SpillPack
- (50) Pads
- (8) Large Socks
- (1) Pack Wipers
- (1) Gallon Jug ENSORB®
- (4) Disposal Bags and Ties
- (2) Pair Gloves
- (2) Goggles
- (1) Emergency Response Guidebook
- (1) Instruction Sheet and SDS



# 95-GALLON SPILLPACK

## 95-GALLON NON-RATED

Dimensions	31.5 in. x 31.5 in. x 41.5 in. (80 cm. x 80 cm. x 105.4 cm.)
Weight	55 lbs. (25 kg.)
Absorb Capacity	55 gal. (208.1 L.)

TYPE	PART NUMBER	REFILL KIT
Universal	1490-YE	1490-RF
Aggressive	1491-YE	1491-RF
Oil Only	1492-YE*	1492-RF

\*Item Shown



- KIT INCLUDES:**
- (1) 95-Gallon SpillPack
  - (100) Pads
  - (10) Large Socks
  - (1) Pack Wipers
  - (1) Gallon Jug ENSORB®
  - (5) Disposal Bags and Ties
  - (2) Pair Gloves
  - (2) Goggles
  - (1) Emergency Response Guidebook
  - (1) Instruction Sheet and SDS

# 95-GALLON WHEELED SPILLPACK

## 95-GALLON WHEELED NON-RATED

Dimensions	31.5 in. x 31.5 in. x 47.5 in. (80 cm. x 80 cm. x 120.6 cm.)
Weight	75 lbs. (34 kg.)
Absorb Capacity	55 gal. (208.1 L.)

TYPE	PART NUMBER	REFILL KIT
Universal	1497-YE*	1497-RF
Aggressive	1498-YE	1498-RF
Oil Only	1499-YE	1499-RF

\*Item Shown



- KIT INCLUDES:**
- (1) 95-Gallon Wheeled SpillPack
  - (100) Pads
  - (10) Large Socks
  - (1) Pack Wipers
  - (1) Gallon Jug ENSORB®
  - (5) Disposal Bags and Ties
  - (2) Pair Gloves
  - (2) Goggles
  - (1) Emergency Response Guidebook
  - (1) Instruction Sheet and SDS



# TOTE SPILL KITS

## LARGE TOTE

Dimensions 45 in. x 35.5 in. x 30.4 in.  
(114.3 cm. x 90.1 cm. x 77.2 cm.)

Weight 114 lbs. (51.8 kg.)

Absorb Capacity 95 gal. (246 L.)

Load Capacity 500 lbs. (226.8 kg.)

TYPE	PART NUMBER	REFILL KIT
Universal	1347-YE	1497-RF
Aggressive	1348-YE*	1498-RF
Oil Only	1349-YE	1499-RF

\*Item Shown



**KIT INCLUDES:**

- (1) Large Tote with Lid
- (1) 4 in. Wheel Set (Set of 4)
- (150) Pads
- (10) Large Socks
- (30) Medium Socks
- (1) Pack Wipers
- (1) 1.5 Cubic Foot Bag of ENSORB®
- (15) Disposal Bags and Ties
- (2) Pair Gloves
- (2) Goggles
- (1) Emergency Response Guidebook
- (1) Instruction Sheet and SDS

## EXTRA-LARGE TOTE

Dimensions 51.5 in. x 47.25 in. x 33 in.  
(130.8 cm. x 120 cm. x 83.8 cm.)

Weight 205 lbs. (93 kg.)

Absorb Capacity 150 gal. (567.8 L.)

Load Capacity 500 lbs. (226.8 kg.)

TYPE	PART NUMBER	REFILL KIT
Universal	1380-YE	1380-RF
Aggressive	1381-YE	1381-RF
Oil Only	1382-YE*	1382-RF

\*Item Shown



**KIT INCLUDES:**

- (1) Extra-Large Tote with Lid
- (1) 8 in. Wheel Set (Set of 4)
- (200) Pads
- (18) Large Socks
- (60) Medium Socks
- (1) Pack Wipers
- (1) 1.5 Cubic Foot Bag of ENSORB®
- (20) Disposal Bags and Ties
- (2) Pair Gloves
- (2) Goggles
- (1) Emergency Response Guidebook
- (1) Instruction Sheet and SDS





# BAG SPILL KITS

## FAST PACK BAG

Dimensions 21.5 in. x 7.5 in. x 7.5 in.  
(54.6 cm. x 19 cm. x 19 cm.)

Weight 8 lbs. (2.7 kg.)

Absorb Capacity 5 gal. (18.9 L.)

TYPE	PART NUMBER	REFILL KIT
Universal	1300-YE*	N/A
Aggressive	1301-YE	N/A
Oil Only	1302-YE	N/A

\*Item Shown



### KIT INCLUDES:

- (1) Fast Pack Duffel Bag
- (10) Pads
- (2) Medium Socks
- (1) Quart Bag ENSORB®
- (1) Disposal Bag and Tie
- (1) Pair Gloves
- (1) Emergency Response Guidebook
- (1) Instruction Sheet and SDS

## SPEEDY DUFFEL BAG

Dimensions 19 in. x 9 in. x 20 in.  
(48.2 cm. x 22.8 cm. x 50.8 cm.)

Weight 10 lbs. (4.5 kg.)

Absorb Capacity 10 gal. (37.8 L.)

TYPE	PART NUMBER	REFILL KIT
Universal	1310-YE	1310-RF
Aggressive	1311-YE*	1311-RF
Oil Only	1312-YE	1312-RF

\*Item Shown



### KIT INCLUDES:

- (1) Speedy Duffel Bag
- (20) Pads
- (2) Large Socks
- (3) Medium Socks
- (1) Quart Bag ENSORB®
- (1) Disposal Bag and Tie
- (1) Pair Gloves
- (1) Emergency Response Guidebook
- (1) Instruction Sheet and SDS

## ECONOMY BAG

Dimensions 17 in. x 5 in. x 20 in.  
(43.1 cm. x 12.7 cm. x 50.8 cm.)

Weight 3 lbs. (1.3 kg.)

Absorb Capacity 5 gal. (18.9 L.)

TYPE	PART NUMBER	REFILL KIT
Universal	13-SP2U*	N/A
Aggressive	13-SP2A	N/A
Oil Only	13-SP20	N/A

\*Item Shown



### KIT INCLUDES:

- (1) Economy Bag
- (10) Pads
- (2) Medium Socks
- (1) Disposal Bag and Tie
- (1) Pair Gloves
- (1) Instruction Sheet and SDS



# VEHICLE SPILL KITS

## WATERPROOF BAG

Dimensions	32 in. x 20 in. x 5 in. (81.2 cm. x 50.8 cm. x 12.7 cm.)
Weight	4 lbs. (1.8 kg.)
Absorb Capacity	5 gal. (18.9 L.)

TYPE	PART NUMBER	REFILL KIT
Universal	13-KTSSU	N/A
Oil Only	13-KTSSO*	N/A

\*Item Shown



- KIT INCLUDES:**
- (1) Waterproof Bag with Buckle Strap
  - (12) Pads
  - (2) Medium Socks
  - (1) Disposal Bag and Tie
  - (1) Pair Gloves
  - (1) Instruction Sheet

## LONG HAUL BAG

Dimensions	26 in. x 26 in. (66.1 cm. x 66.1 cm.)
Weight	9 lbs. (4.1 kg.)
Absorb Capacity	5 gal. (18.9 L.)

TYPE	PART NUMBER	REFILL KIT
Universal	13-ELHT-U	N/A
Oil Only	13-ELHT-O*	N/A

\*Item Shown



- KIT INCLUDES:**
- (1) Clear Bag
  - (10) Pads
  - (4) Medium Socks
  - (1) Quart Bag ENSORB®
  - (1) 10 oz. Jar Low-Temp Premix Paste
  - (1) 20-Gallon Prowler Pool
  - (1) Disposal Bag and Tie
  - (1) Pair Gloves
  - (1) Goggle
  - (1) Emergency Response Guidebook
  - (1) Instruction Sheet and SDS

## LONG HAUL TRUCK MOUNT

Dimensions	34 in. x 20 in. x 16 in. (86.3 cm. x 50.8 cm. x 40.6 cm.)
Weight	41 lbs. (19 kg.)
Absorb Capacity	10 gal. (37.8 L.)

TYPE	PART NUMBER	REFILL KIT
Universal	13-TWSK-U*	13-TWSK-U-RF
Oil Only	13-TWSK-O	13-TWSK-O-RF

\*Item Shown



- KIT INCLUDES:**
- (1) Poly-Edge Truck Mount Container
  - (1) Fuel Tank Leak Repair Kit:
    - (1) 10 oz. Jar Low-Temp Premix Paste
    - (1) Aluminum Butyl Tape
    - (1) Super Absorbent Pad
    - (1) Rubber Barrier Sheet
    - (2) Zip Ties
    - (1) Pair Gloves
  - (1) 100-Gallon Prowler Pool
  - (25) Pads
  - (4) Medium Socks
  - (1) Gallon Jug ENSORB®
  - (2) Disposal Bags and Ties
  - (1) Pair Gloves
  - (1) Goggle
  - (1) Emergency Response Guidebook
  - (1) Instruction Sheet and SDS

# BATTERY ACID SPILL KITS

## 5-GALLON PAIL BATTERY ACID

1305-BAT	
Dimensions	13 in. x 13 in. x 17 in. (33 cm. x 33 cm. x 43.1 cm.)
Weight	10 lbs. (4.5 kg.)
Absorb Capacity	4 gal. (15.1 L.)



- KIT INCLUDES:**
- (1) 5-Gallon Safety Pail
  - (10) Pads
  - (3) Medium Socks
  - (1) Acid Neutralizing Shaker
  - (1) Disposal Bag and Tie
  - (1) Pair Gloves
  - (1) Goggle
  - (1) Hooded Coverall Suit
  - (1) Instruction Sheet and SDS

## 20-GALLON SALVAGE DRUM BATTERY ACID

1320-BAT	
Dimensions	24 in. x 24 in. x 19 in. (60.9 cm. x 60.9 cm. x 48.2 cm.)
Weight	23 lbs. (11 kg.)
Absorb Capacity	13 gal. (49.2 L.)
Load Capacity	166 lbs. (75.3 kg.)



- KIT INCLUDES:**
- (1) 20-Gallon Salvage Drum
  - (30) Pads
  - (3) Medium Socks
  - (3) Medium Pillows
  - (1) Acid Neutralizing Shaker
  - (10) Disposal Bags and Ties
  - (1) Pair Gloves
  - (1) Goggle
  - (1) Hooded Coverall Suit
  - (1) Instruction Sheet and SDS



# ENSORB®

## WALL-MOUNT SPILL STATION, UNIVERSAL

### 13-ESS

Dimensions 12.5 in x 6.5 in. x 20.5 in.  
(31.7 cm. x 16.5 cm. x 52 cm.)

Weight 4 lbs. [1.8 kg.]

Absorb Capacity 1 gal. [3.7 L.]



### KIT INCLUDES:

- (1) Wall Rack
- (1) Gallon Jug ENSORB®
- (1) Universal Spill Kit Sticker
- (1) Hand Broom
- (1) Dust Pan
- (10) Trash Bags
- (1) SDS

## WALL-MOUNT SPILL STATION DELUXE, UNIVERSAL

### 13-ESSD

Dimensions 12.5 in x 6.5 in. x 20.5 in.  
(31.7 cm. x 16.5 cm. x 52 cm.)

Weight 9 lbs. [4.1 kg.]

Absorb Capacity 1 gal. [3.7 L.]



### KIT INCLUDES:

- (1) Wall Rack
- (1) Gallon Jug ENSORB®
- (1) Universal Spill Kit Sticker
- (1) Hand Broom
- (1) Dust Pan
- (50) Trash Bags
- (1) Spill Caution Sign
- (1) Box of Gloves
- (1) SDS

## SUPER ABSORBENT, UNIVERSAL

### ENP D710

Dimensions 19 in. x 9 in. x 20 in.  
(48.2 cm. x 22.8 cm. x 50.8 cm.)

Weight 8 lbs. [3.6 kg.]

Absorb Capacity 2 gal. [7.6 L.]



### KIT INCLUDES:

- (1) Speedy Duffel Bag
- (2) Gallon Jugs ENSORB®
- (1) Broom
- (1) Dustpan and Brush
- (10) Disposal Bags and Ties
- (1) Goggle
- (1) Pair Gloves
- (1) Instruction Sheet and SDS





**50-GALLON WHEELED SALVAGE DRUM, UNIVERSAL**

1359-YE-SD	
Dimensions	24 in. x 29 in. x 46 in. (60.9 cm. x 73.6 cm. x 116.8 cm.)
Weight	109 lbs. (49.4 kg.)
Absorb Capacity	16 gal. (60.5 L.)
Load Capacity	275 lbs. (124.7 kg.)



- KIT INCLUDES:**
- (1) 50-Gallon Wheeled Salvage Drum
  - (2) 1.5 Cubic Foot Bags ENSORB®
  - (1) Broom
  - (1) Dustpan with Brush
  - (10) Disposal Bags and Ties
  - (1) 64 oz. Dispensing Scoop

**95-GALLON WHEELED SALVAGE DRUM**

Dimensions	32 in. x 36 in. x 47.5 in. (81 cm. x 91 cm. x 120 cm.)	
Weight	95 lbs. (43 kg.)	
Absorb Capacity	61 gal. (230.9 L.)	
Load Capacity	250 lbs. (113.9 kg.)	

TYPE	PART NUMBER	REFILL KIT
Universal	1397-YE-SD-GA*	1397-RF-SD-GA
Oil Only	1399-YE-SD-GA	1399-RF-SD-GA

\*Item Shown



- KIT INCLUDES:**
- (1) 95-Gallon Wheeled Salvage Drum
  - (50) Pads
  - (6) Large Socks
  - (4) Medium Socks
  - (3) 1.5 Cubic Foot Bags ENSORB®
  - (1) Broom
  - (1) Dustpan with Brush
  - (8) Disposal Bags and Ties
  - (1) 64 oz. Dispensing Scoop

# WALL-MOUNT

## LARGE WALL-MOUNT CABINET

Dimensions	14 in. x 13 in. x 30 in. (35.5 cm. x 33 cm. x 76.2 cm.)
Weight	34 lbs. (16 kg.)
Absorb Capacity	15 gal. (56.8 L.)

TYPE	PART NUMBER	REFILL KIT
Universal	13-WML-U	13-WML-U-RF
Aggressive	13-WML-A*	13-WML-A-RF
Oil Only	13-WML-O	13-WML-O-RF

\*Item Shown



**KIT INCLUDES:**

- 1) Large Wall-Mount Locker
- (25) Pads
- (4) Medium Socks
- (4) Medium Pillows
- (1) Gallon Jug ENSORB®
- (1) Pack Wipers
- (4) Disposal Bags and Ties
- (1) Pair Gloves
- (1) Goggle
- (1) Emergency Response Guidebook
- (1) Instruction Sheet and SDS

## EXTRA-LARGE WALL-MOUNT CABINET

Dimensions	14.5 in. x 20 in. x 33 in. (36.8 cm. x 50.8 cm. x 83.8 cm.)
Weight	48 lbs. (22 kg.)
Absorb Capacity	25 gal. (94.6 L.)

TYPE	PART NUMBER	REFILL KIT
Universal	13-WMXL-U	13-WMXL-U-RF
Aggressive	13-WMXL-A	13-WMXL-A-RF
Oil Only	13-WMXL-O*	13-WMXL-O-RF

\*Item Shown



**KIT INCLUDES:**

- (1) Extra-Large Wall-Mount Locker
- (50) Pads
- (7) Medium Socks
- (6) Medium Pillows
- (1) Gallon Jug ENSORB®
- (1) Pack Wipers
- (4) Disposal Bags and Ties
- (2) Pair Gloves
- (2) Goggles
- (1) Emergency Response Guidebook
- (1) Instruction Sheet and SDS

# ACCESSORIES

### 13-PPE

P.P.E. Spill Kit Pack

**KIT INCLUDES:**

- (1) Economy Bag
- (3) Hooded Coverall Suits
- (1) Face Shield Mask and Bracket
- (3) Pair Boot Covers
- (3) Pair Gloves
- (3) Goggles
- (3) Disposal Bags and Ties
- (1) Emergency Response Guidebook

### 13-TS

10 per pack



### ENP SPILL-SIGN



### ENP HAZBAG

250 per case





## ► PLUG N DIKE

Plug spills quickly using the ENPAC® Plug N Dike products!

Plug N Dike is a nontoxic paste used to plug leaks in fuel tanks, steel drums, and other metal containers. No preparation is required; stick directly onto dirty surfaces.

Plug N Dike is offered in both a premix paste and granular form. The premix is ready to go for your immediate needs whereas the granular must be mixed with water prior to use.

**PREMIX:** This premixed paste instantly sticks to metal drums and fuel tanks. This paste stops leaks during emergency spills, protecting workers and the environment. (Page 110)

**GRANULAR:** Granular is easily mixed with water to create the plugging paste. This option is ideal to create large batches for bigger leaks. (Page 111)

**PLUG RUGS:** These premixed rugs consist of a top polyethylene liner and a bottom layer of premix that can be used for plugging large holes or to lay on top of drains. (Page 111)

**LEAK REPAIR KITS:** Stopping a leaking tank can be the key to minimal cleanup when a spill occurs. These kits provide all the tools needed to react quickly to unexpected spills. (Page 112)





# PLUG N DIKE

## 10 OZ. LOW-TEMP PREMIX PASTE

P-2A	
Diameter (Per Jar)	3.25 in. (8.2 cm.)
Height (Per Jar)	1.75 in. (4.4 cm.)
Weight	10 oz. (283 g.)
Case of Jars	8 Jars, P-2A-8 25 Jars, P-2A-25



## 10 OZ. PREMIX PASTE

P-2	
Diameter (Per Jar)	3.25 in. (8.2 cm.)
Height (Per Jar)	1.75 in. (4.4 cm.)
Weight (Per Jar)	10 oz. (283 g.)
Case of Jars	8 Jars, P-2-8 25 Jars, P-2-25



## 1 LB. LOW-TEMP PREMIX PASTE

1-PMPA	
Diameter (Per Jar)	3.5 in. (8.8 cm.)
Height (Per Jar)	2.75 in. (6.9 cm.)
Weight	1 lb. (0.4 kg.)
Case of Jars	8 Jars, 1-PMPA-8 25 Jars, 1-PMPA-25



## 1 LB. PREMIX PASTE

1-PMP	
Diameter (Per Jar)	3.5 in. (8.8 cm.)
Height (Per Jar)	2.75 in. (6.9 cm.)
Weight (Per Jar)	1 lb. (0.4 kg.)
Case of Jars	8 Jars, 1-PMP-8 25 Jars, 1-PMP-25



## 4 LBS. LOW-TEMP PREMIX PASTE

4-PMPA	
Diameter	5 in. (12.7 cm.)
Height	5 in. (12.7 cm.)
Weight	4 lbs. (1.8 kg.)



## 8 LBS. LOW-TEMP PREMIX PASTE

8-PMPA	
Diameter	7.5 in. (19.1 cm.)
Height	7 in. (17.7 cm.)
Weight	8 lbs. (3.6 kg.)



### 10 LBS. GRANULAR

10-P	
Diameter	4 in. (10.1 cm.)
Height	12 in. (30.4 cm.)
Weight	10 lbs. (4.5 kg.)



Just add water!

### 48 LBS. GRANULAR

48-P	
Diameter	8 in. (20.3 cm.)
Height	16 in. (40.6 cm.)
Weight	48 lbs. (21.7 kg.)



Just add water!

### PLUG RUGS

PART NUMBER	DIMENSIONS LxWxH IN. (CM.)	WEIGHT LB. (KG.)
8R	8 x 8 x 0.4 (20.3 x 20.3 x 0.9)	1 (.45)
16R	16 x 16 x 0.4 (40.6 x 40.6 x 0.9)	8 (3.6)
24R	16 x 24 x 0.4 (40.6 x 60.9 x 0.9)	12 (5.4)



### ▶ DID YOU KNOW?

The low-temperature option allows the mixture to work in extremely cold conditions at 5 degrees Fahrenheit (-15 degrees Celsius)

## FUEL TANK REPAIR

### 13-LRK

Dimensions	26 in. x 26 in. (66.1 cm. x 66.1 cm.)
Weight	1.5 lbs. (0.7 kg.)



- KIT INCLUDES:**
- (1) 10 oz. Jar Low-Temp Premix Paste
  - (1) Aluminum Butyl Tape
  - (1) Super Absorbent Pad
  - (1) Rubber Barrier Sheet
  - (2) Zip Ties
  - (1) Pair Gloves

## DRUM REPAIR, UNIVERSAL

### 13-DRK-U

Dimensions	21.5 in. x 7.5 in. x 7.5 in. (54.6 cm. x 19 cm. x 19 cm.)
Weight	4 lbs. (1.8 kg.)
Absorb Capacity	6 gal. (22.7 L.)



- KIT INCLUDES:**
- (1) Fast Pack Duffel Bag
  - (15) Pads
  - (3) Medium Socks
  - (1) Disposal Bag and Tie
  - (1) 10 oz. Jar Low-Temp Premix Paste
  - (1) Pair Gloves,
  - (1) Instruction Sheet and SDS

## GRANULAR READY-TO-USE

### BC-21

Dimensions	6 in. x 6 in. x 3 in. (15.2 cm. x 15.2 cm. x 7.6 cm.)
Weight	2 lbs. (0.9 kg.)



- KIT INCLUDES:**
- (1) 6x6 in. Plastic Bag
  - (1) 6 oz. Granular
  - (1) 4 oz. cup
  - (1) Pair Gloves

## LARGE DELUXE FOAM AND PLUG SET

### EFWP-22

Dimensions	14 in. x 8.25 in. x 5 in. (35.5 cm. x 20.9 cm. x 12.7 cm.)
Weight	3.5 lbs. (1.5 kg.)



- KIT INCLUDES:**
- (1) Plastic Container with Lid
  - (1) 1 lb. Jar Low-Temp Premix Paste
  - (3) 12 in. Polyurethane Foam Pieces
  - (1) 3 piece plug cone set
  - (1) 3 piece plug wedge
  - (1) Rubber Mallet
  - (2) 11 in. Zip Ties
  - (2) 24 in. Zip Ties
  - (1) Pair Gloves

## SMALL DELUXE FOAM AND PLUG SET

### PFR-6

Dimensions	14 in. x 8.25 in. x 5 in. (35.5 cm. x 20.9 cm. x 12.7 cm.)
Weight	2 lbs. (0.9 kg.)



- KIT INCLUDES:**
- (1) Plastic Container with Lid
  - (1) 1 lb. Jar Low-Temp Premix Paste
  - (2) 6 in. Polyurethane Foam Pieces
  - (1) 3 piece plug cone set
  - (1) Small Plug Wedge
  - (1) 11 in. Zip Tie
  - (1) 24 in. Zip Tie
  - (1) Pair Gloves

## PREMIX KIT

### SRK-FP-2


Dimensions	9 in. x 12 in. x 4 in. (22.8 cm. x 30.4 cm. x 10.1 cm.)
Weight	1 lb. (0.5 kg.)



- KIT INCLUDES:**
- (1) 9x12 in. Plastic Bag
  - (1) 10 oz. Jar Low-Temp Premix Paste
  - (2) 6 in. Polyurethane Foam Pieces
  - (1) Pair Gloves
  - (2) 11 in. Zip Ties



# SORBENTS



Soak up spills with ENPAC®'s large variety of polypropylene-based absorbents that are available in multiple configurations to make cleanup efforts easy.

# ► SORBENTS

## WHAT TYPE OF SORBENT IS NEEDED? GETTING THE RIGHT PRODUCT FOR YOUR NEEDS

**ENSORB®:** A granular absorbent that is used to absorb and encapsulate any liquid or semi-liquid quickly and efficiently. (Pages 115-116)

**Pads:** Absorbent pads are the most popular option for cleaning up spills and keeping workspaces clean. (Page 117)

**Socks:** Surround spills and prevent further damage by incorporating absorbent socks into spill response efforts. (Page 117)

**Rolls:** Roll out the exact number of sorbent pads required for each job with this line of sorbents. (Page 117)

**Boom:** Easily skim oil from water with these absorbent booms that float and connect for simple operation. (Page 118)

**Pillows:** Pillows fit where other absorbents cannot and are filled with enough material to absorb 25 times their own weight. (Page 118)

**Drum Top Pads:** Drum Top Pads are engineered to precisely fit on top of a 55-gallon drum to catch incidental drips and leaks during dispensing operations. (Page 118)

**Hose Wraps and Bibbs:** Hose Wraps and Bibbs quickly mend hoses while absorbing liquids for a temporary patch that keep operations moving. (Page 119)

**Maintenance Blankets:** Machine maintenance can be messy, but work areas don't have to be. These absorbent blankets prevent fluids from reaching the ground, providing quick and easy cleanup. (Page 119)

**Super Absorbent Polymers:** Known for their efficiency when removing oils and other chemicals from water, super absorbent polymers work quickly to absorb and are non-leaching. (Page 120)





# ► ENSORB®

## ENSORB® Super Absorbent has unlimited uses!

ENSORB® is a highly efficient granular absorbent that is lightweight, environmentally friendly, and landfill safe. Immediately absorbing liquids of any viscosity, ENSORB® leaves surfaces clean and dry. Absorbs any kind of liquid or semi-liquid on contact and permanently encapsulates absorbed materials. This includes all animal, vegetable, mineral, petroleum, and chemical liquids (cannot be used with Hydrofluoric Acid).

- Great for use in spill kits.
- 15 to 20 times the absorption capacity of clay-based products.
- Virtually unlimited uses as a dry absorbent that is safe in all applications.
- Picks up liquids of any viscosity and leaves the surface clean and dry.
- Turns the spilled liquid into a solid that can be disposed of easily.
- Lightweight and simple to use.
- Dramatically reduces clean up costs as well as ever-increasing costs of disposal.
- Not injurious to soil, cement, asphalt, tile, plants, animals, or humans.
- Contains no reactive chemicals, is non-toxic and non-flammable.






## 1.5 CUBIC FOOT BAG GRANULAR ABSORBENT

### ENP D225

Dimensions 20 in. x 7 in. x 31 in. (50.8 cm. x 17.7 cm. x 78.7 cm.)

Weight 11 lbs. (5 kg.)

Regulations: 40 CFR 112.7, 40 CFR 122.26, 29 CFR 1910.22(a)(2)



## 1-GALLON JUG DISPENSER GRANULAR ABSORBENT

### ENP D503

Dimensions 5 in. x 5 in. x 10 in. (12.7 cm. x 12.7 cm. x 25.4 cm.)

Weight 1.5 lbs. (0.7 kg.)

Regulations: 40 CFR 112.7, 40 CFR 122.26, 29 CFR 1910.22(a)(2)



Offered in case quantity of 6 (ENP D503CS)

## ▶ DON'T FORGET!

ENSORB® permanently encapsulates absorbed liquids.



It also outperforms diatomaceous earth and clay by 15-20 times!

## 1-QUART BAG GRANULAR ABSORBENT, 12 PER CASE

### ENP D208CS

Dimensions 12 in. x 9 in. x 9 in. (30.5 cm. x 22.8 cm. x 22.8 cm.)

Weight 4 lbs. (1.8 kg.)

Regulations: 40 CFR 112.7, 40 CFR 122.26, 29 CFR 1910.22(a)(2)



## 55-GALLON POLY DRUM GRANULAR ABSORBENT

### ENP D555

Dimensions 23 in. x 23 in. x 37 in. (58.4 cm. x 58.4 cm. x 93.9 cm.)

Weight 85 lbs. (38.5 kg.)

Regulations: 40 CFR 112.7, 40 CFR 122.26, 29 CFR 1910.22(a)(2)



## 1-GALLON BOTTLE SUPER CLEANER & DEGREASER, CASE OF 4

### ENP D312CS

Diameter 6 in. (15 cm.)

Height 11.5 in. (29 cm.)

Regulations: 40 CFR 112.7, 40 CFR 122.26, 29 CFR 1910.22(a)(2)



A versatile, multipurpose, concentrated solution ideal to take on any mess, cleaning surfaces and leaving them free of residue! Perfectly paired with ENSORB® Granular Absorbents.

## SORBENTS PADS



PART NUMBER	TYPE	ABSORB CAPACITY GAL. (L.)	PADS PER BALE
ENP UPB 100H	Universal, Bonded*, Heavyweight	28 (105)	100
ENP UPB100M	Universal, Bonded*, Medium weight	24 (90)	100
ENP UPB200S	Universal, Bonded*, Lightweight	28 (105)	200
ENP HPB100H	Aggressive, Bonded*, Heavyweight	28 (105)	100
ENP HPB100M	Aggressive, Bonded*, Medium weight	24 (90)	100
ENP OPB100H	Oil Only, Bonded*, Heavyweight	28 (105)	100
ENP OPB100M	Oil Only, Bonded*, Medium weight	24 (90)	100
ENP OPB200S	Oil Only, Bonded*, Lightweight	28 (105)	200

\*Bonded pads include a cover layer to prevent linting.

## SORBENTS SOCKS



PART NUMBER	TYPE	DIMENSIONS DIA. x L IN. (CM.)	ABSORB CAPACITY GAL. (L.)	SOCKS PER CASE
ENP 40US34	Universal, Medium	3 x 4 ft. (1.3 x 1.2 m.)	36 (136)	40
ENP 20US38	Universal, Large	3 x 8 ft. (1.3 x 2.4 m.)	36 (136)	20
ENP 40HS34	Aggressive, Medium	3 x 4 ft. (1.3 x 1.2 m.)	36 (136)	40
ENP 20HS38	Aggressive, Large	3 x 8 ft. (1.3 x 2.4 m.)	36 (136)	20
ENP 40OS34	Oil Only, Medium	3 x 4 ft. (1.3 x 1.2 m.)	36 (136)	40
ENP 20OS38	Oil Only, Large	3 x 8 ft. (1.3 x 2.4 m.)	36 (136)	20

## SORBENTS ROLLS



PART NUMBER	TYPE	DIMENSIONS FT. (M.)	ABSORB CAPACITY GAL. (L.)
ENP URB30150	Universal, Bonded*, Heavyweight	150 x 30 in. (45.7 x 76.2 cm.)	52 (196.8)
ENP HRB30150	Aggressive, Bonded*, Heavyweight	150 x 30 in. (45.7 x 76.2 cm.)	52 (196.8)
ENP ORB30150	Oil Only, Bonded*, Heavyweight	150 x 30 in. (45.7 x 76.2 cm.)	52 (196.8)

\*Bonded pads include a cover layer to prevent linting.

## SORBENTS BOOM



PART NUMBER	DIMENSIONS DIA. x L IN. (CM.)	ABSORB CAPACITY GAL. (L.)	SOCKS PER CASE
ENP 0B510	5 x 10 ft. (12.7 x 3.1 m.)	34 (128) (per case)	4
ENP 0B810	8 x 10 ft. (20.3 x 3.1 m.)	70 (264) (per case)	4

## SORBENTS PILLOWS



PART NUMBER	TYPE	DIMENSIONS LxW IN. (CM.)	ABSORB CAPACITY GAL. (L.)	CASE QUANTITY
ENP 40UPI1010	Universal	10 x 10 (25.4 x 25.4)	36 (136) (per case)	40
ENP 16UPI1818	Universal	18 x 18 (45.7 x 45.7)	44 (166) (per case)	16
ENP 40HPI1010	Aggressive	10 x 10 (25.4 x 25.4)	36 (136) (per case)	40
ENP 16HPI1818	Aggressive	18 x 18 (45.7 x 45.7)	44 (166) (per case)	16
ENP 40OPIL1010	Oil Only	10 x 10 (25.4 x 25.4)	36 (136) (per case)	40
ENP 16OPIL1818	Oil Only	18 x 18 (45.7 x 45.7)	44 (166) (per case)	16

## UNIVERSAL DRUM TOP ABSORBENT PAD

### ENP 25UOT

Dimensions	Fits 55 gal. drum
Absorb Capacity	8 gal. (30.3 L.)
Case Quantity	25 Pads (per case)

Regulations: 40 CFR 112.7, 40 CFR 122.26, 29 CFR 1910.22(a)(2)



## OIL ONLY DRUM TOP ABSORBENT PAD

### ENP 25OOT

Dimensions	Fits 55 gal. drum
Absorb Capacity	8 gal. (30.3 L.)
Case Quantity	25 Pads (per case)

Regulations: 40 CFR 112.7, 40 CFR 122.26, 29 CFR 1910.22(a)(2)





## HOSE BIBBS



PART NUMBER	WEIGHT LB. (KG.)	DIMENSIONS LxWxH IN. (CM.)	SPILL CAPACITY OZ. (ML.)	ABSORB CAPACITY OZ. (ML.)	CASE QUANTITY
4701-YE	1 (0.4)	10 x 8.5 x 0.25 (25.4 x 21.5 x 0.6) Opening 2.5 (6.3)	16 (473.1)	8 (236.6)	1 Hose Bibb per Box
4701-YE-BX	5 (2.3)	10 x 8.5 x 0.25 (25.4 x 21.5 x 0.6) Opening 2.5 (6.3)	80 (2.3 L)	40 (118 L)	5 Hose Bibbs per Box

## HOSE WRAPS



PART NUMBER	SIZE	DIMENSIONS LxW IN. (CM.)	WEIGHT LB. (KG.)	ABSORB CAPACITY OZ. (ML.)	FITS HOSES DIA. IN. (CM.)
4702-YE	Small	17.5 x 11.75 x 0.25 (44.5 x 29.9 x 0.7)	0.6 (0.2)	25 (739.4)	2-3 (5.1-7.6)
4704-YE	Medium	20.5 x 17.25 x 0.25 (52.1 x 43.9 x 0.7)	0.8 (0.3)	25 (739.4)	4-5 (10.2-12.7)
4706-YE	Large	30.5 x 17.25 x 0.25 (77.5 x 43.9 x 0.7)	1 (0.5)	25 (739.4)	6-8 (15.3-20.3)
4710-YE	Extra Large	48 x 20 x 0.25 (122 x 51 x 0.7)	1.2 (1.5)	25 (739.4)	10 (25.4)

## MAINTENANCE BLANKETS



PART NUMBER	DIMENSIONS LxW IN. (CM.)	WEIGHT LB. (KG.)	ABSORB. CAPACITY GAL. (L.)
4720-BK	12 x 3 (3.7 x 0.9)	5 (2.2)	6 (22.7)
4725-BK	12 x 6 (3.7 x 1.8)	7 (3.1)	7 (26.5)
4730-BK	12 x 9 (3.7 x 2.7)	11 (4.9)	8 (30.3)
4735-BK	12 x 12 (3.7 x 3.7)	17 (7.7)	9 (34.1)

# SUPER ABSORBENT POLYMERS

## PETROGUARD

An alternative to ENSORB®, PetroGuard is a hydrophobic product making it an optimal choice when working with oils and chemicals floating on water. PetroGuard encapsulates and absorbs rapidly which becomes important when dealing with reactive chemicals.



PART NUMBER	DESCRIPTION	CASE QUANTITY	DIMENSIONS [LxWxH]
ENP PG1	1-Gallon Jug Dispenser	1	5 in. x 5 in. x 10 in. [12.7 cm. x 12.7 cm. x 25.4 cm.]
ENP PG77	Packets	30	7 in. x 7 in. [17.7 cm. x 17.7 cm.] (per packet)
ENP PG1421	Pillows	5	14 in. x 21 in. [35.5 cm. x 53.3 cm.] (per pillow)
ENP PG2135	Blankets	2	21 in. x 35 in. [53.3 cm. x 88.9 cm.] (per blanket)
ENP PG742	Mini Booms	5	7 in. x 42 in. [17.7 cm. x 106.6 cm.] (per boom)

## IMBIBER

Imbiber Beads® absorb and hold onto organic hydrocarbons while repelling water. As the beads begin to absorb, they swell allowing them to hold up to 27 times the volume of the original size. The Activation Awareness Technology allows the beads to change colors to show chemicals have been absorbed.



PART NUMBER	DESCRIPTION	CASE QUANTITY	DIMENSIONS [LxWxH]
ENP IEBS505000	Granular Mix	1	8.5 in. x 8.5 in. x 12 in. [21.5 cm. x 21.5 cm. x 30.4 cm.]
ENP IE0077	Packets	30	7 in. x 7 in. [17.7 cm. x 17.7 cm.] (per packet)
ENP IE1421	Pillows	5	14 in. x 21 in. [35.5 cm. x 53.3 cm.] (per pillow)
ENP IE2135	Blankets	2	21 in. x 35 in. [53.3 cm. x 88.9 cm.] (per blanket)
ENP IE0742	Mini Booms	5	7 in. x 42 in. [17.7 cm. x 106.6 cm.] (per boom)
ENP IE0905FB	Boom	2	4.5 in. x 9 ft. [11 cm. x 2.7 m.] (per boom)

# CHEMICAL COMPATIBILITY AND REGULATIONS





# ▶ CHEMICAL COMPATIBILITY KEY AND USER NOTE:

This report is offered as a guide and was developed from information which, to the best of ENPAC®'s knowledge, was reliable and accurate. Due to variables and conditions of application beyond ENPAC®'s control, none of the data shown in this guide is to be construed as a guarantee, expressed or implied. ENPAC®, LLC assumes no responsibility, obligation, or liability in conjunction with the use or misuse of the information.

The data shown is the result of laboratory tests obtained from leading chemical companies and independent reports that are intended to serve only as a guide. Testing is not conducted by ENPAC®, LLC. No performance warranty is intended or implied. Confirmation of the validity and suitability in specific cases should be obtained. When considering flexible containment

for specific applications, it is suggested that a fabric sample be tested in actual service before specification. Where impractical, tests should be devised which simulate actual service conditions as closely as possible.

Ratings are based on visual and physical examination of samples after removal from the test chemical. Results represent the material's ability to retain its performance properties when in contact with the indicated chemical.

The degree of chemical attack on any material is governed by the conditions under which it is exposed. Exposure time, temperature, and size of the area of exposure usually varies considerably in application, therefore, this table is given and accepted at the user's risk.

## ELVALOY COPOLYMER

### SNAP-UP, 2' L-BRACKET, SELF-RISING, SNAP-FOAM

**A =** EXCELLENT

**B =** GOOD, MINOR EFFECT, SLIGHT CORROSION OR DISCOLORATION

**C =** FAIR, MODERATE EFFECT, NOT RECOMMENDED FOR CONTINUOUS USE

**D =** SEVERE EFFECT, NOT RECOMMENDED FOR ANY USE

#### CHEMICAL RATING

Chloramine - PW (1%)	A	Ferric Chloride	A	N-Serve® Nitrogen Stabilizer	C	Sodium Hypochlorite - PW (1%)	A
20% Chlorine Solution	A	Flowback/Produced Water (typical)	A	Naphtha (White Gas)	A	Sodium Hypochlorite - PW (500 mg/l)	A
Chlorine - PW (2 mg/l)	A	#2 Fuel Oil	A	Naphtha (TT-N-95B NOT.2 TYPE 1)	A	Sodium Hypochlorite - PW (50 mg/l)	A
Clorox	A	#6 Fuel Oil	A	Natural Gas Condensate	A	Styrene Monomer	C
Conc. Ammonium Hydroxide	A	Gasoline	B	Synthetic Solution	A	Sulfuric Acid (50%)	A
Corn Oil	A	Glycerin	A	Nitric Acid (5%)	A	Sulfuric Acid (10%, 140° F)	A
Crude Oil	A	Hexane	A	Nitric Acid (50%)	C	Tanic Acid (50%)	A
Diesel Fuel	A	Hydraulic Fluid (Petroleum Based)	A	Palm Oil	A	THF - Tetrahydrofuran (9%)	A
Dimethyl Sulfoxide (10%)	A	Hydraulic Fluid (Phosphate Ester Based)	C	Palm Oil (140° F)	A	Toluene	C
Envirotemp® FR3	A	Hydrocarbon Type II (40% Aromatic)	C	Peracetic Acid - PW (15%)	C	Transformer Oil	A
Ethanol	A	Hydrochloric Acid (36%)	A	Perchloroethylene	C	Turpentine	A
Ethyl Acetate	C	Hydrochloric Acid (50%)	A	Phenol Formaldehyde	B	Urea Formaldehyde	A
Ethyl Alcohol	A	Hydrofluoric Acid (5%)	A	Phosphoric Acid (50%)	A	UAN (28%) Urea	A
Ethylene Dichloride	C	Hydrofluoric Acid (50%)	A	Phosphoric Acid (85%)	A	Ammonium Nitrogen	A
Ethylene Dichloride 0.1%	A	Hydrofluosilicic Acid (30%)	A	Phosphoric Acid (100%)	C	Varsol	A
		Ivory Soap	A	Phosphoric Chek® 075	A	Vegetable Oil	A
		Jet A	A	Fire Retardant (60%)	A	Water	A
		JP-4 Jet Fuel	A	Phthalate Plasticizer	C	Water (Deionized)	A
		JP-5 Jet Fuel	A	Potassium Acetate (50%)	A	Water (LSI -5)	A
		JP-8 Jet Fuel	A	Raw Linseed Oil A Roundup®	A	Water (180°F)	A
		Liquid Nitrogen Fertilizer (28%)	A	SAE-30 Oil	A	White Gas	A
		Methanol	A	Salt Water (25%)	B	Xylene	C
		Methyl Alcohol	A	Sea Water	A		
		Mineral Spirits	A	Shell Diala™ Transformer Oil	A		
		Municipal Landfill Leachate (typical)	A	Sodium Hydroxide (60%)	A		
			A	Sodium Hypochlorite (15%)	A		

# ENDURALINE

## WIRE L-BRACKET, ALUMINUM L-BRACKET, FRACTANK, ISO TANK, AND STINGER SPILLPAL

**A =** EXCELLENT

**B =** GOOD, MINOR EFFECT, SLIGHT CORROSION OR DISCOLORATION

**C =** FAIR, MODERATE EFFECT, NOT RECOMMENDED FOR CONTINUOUS USE

**D =** SEVERE EFFECT, NOT RECOMMENDED FOR ANY USE

### CHEMICAL RATING

Acetaldehyde	C	Beer	A	Ethanol (Ethyl Alcohol)	B	Methyl Alcohol, 10%	A	Rosins	B
Acetamide	A	Benzaldehyde	A	Ether	D	Methyl Chloride	C	Salicylic Acid	B
Acetate Solvents	A	Benzene	C	Ethyl Acetate	A	Methyl Ethyl Ketone (MEK, Butanone)	B	Salt Brine (NaCl saturated)	A
Acetic Acid	A	Benzene Sulfonic Acid	A	Ethyl Benzoate	C	Methyl Isobutyl Ketone	C	Sea Water	A
Acetic Acid, 20%	A	Benzoic Acid	A	Ethyl Chloride	C	Methyl Isopropyl Ketone	D	Shellac (Bleached)	A
Acetic Acid, 80%	D	Borax (Sodium Borate)	A	Ethyl Ether	D	Methylamine	A	Shellac (Orange)	A
Acetic Acid, Glacial	D	Boric Acid, 10%	A	Ethylene Glycol	A	Methylene Chloride	D	Silver Bromide	A
Acetic Anhydride	D	Bromine Gas	D	Ethylene Oxide Gas (ETO), dry 3%	A	Milk	A	Silver Nitrate	A
Acetone	B	Butadiene	D	Fatty Acids	D	Mineral Spirits	B	Soap Solutions	D
Acetylene	D	Butane Gas	C	Ferric Chloride, 10%	A	Monoethanol Amine	C	Sodium Acetate	A
Acrylonitrile	A	Butanol (Butyl Alcohol)	B	Ferric Nitrate	A	Motor Oil	C	Sodium Benzoate	A
Alcohols: Amyl	D	Butyl Amine	C	Ferrous Sulfate	A	Mustard	A	Sodium Bicarbonate (Baking Soda)	A
Alcohols: Benzyl	B	Butyric Acid, 20%	D	Fluosilicic Acid, 20%	B	Naphtha	A	Sodium Bisulfate, 10%	A
Alcohols: Butyl	B	Calcium Carbonate (Chalk) CaCO <sub>3</sub>	B	Fluosilicic Acid, 100%	B	Natural Gas	A	Sodium Bisulfite	A
Alcohols: Ethyl	B	Calcium Chloride, 10%	B	Formaldehyde, 40%	D	Nitric Acid, 5-10%	C	Sodium Bromide	A
Alcohols: Isobutyl	A	Calcium Hydroxide (Lye), 10%	A	Formaldehyde, 100%	B	Nitric Acid, 20%	C	Sodium Carbonate	B
Alcohols: Isopropyl	A	Calcium Hypochlorite	A	Formic Acid (Methanoic Acid), 10%	D	Nitric Acid, 50%	B	Sodium Chlorate	B
Alcohols: Methyl	A	Calcium Nitrate	A	Fruit Juices	A	Nitric Acid (Concentrated)	C	Sodium Chloride	A
Alcohols: Propyl (1-Propanol)	A	Calcium Oxide (Unslaked Lime) CaO	B	Fuel Oils	A	Nitrobenzene	C	Sodium Hydroxide, 80%	D
Aluminum Fluoride	A	Carbolic Acid (Phenol)	B	Furfural (Ant Oil ) C5H4O2	D	Nitromethane	A	Sodium Hypochlorite, <20%	A
Aluminum Hydroxide	A	Carbon Dioxide, dry	A	Gallic Acid, 5%	A	Nitrous Oxide	C	Sodium Hypochlorite, 100%	B
Aluminum Nitrate	A	Carbon Dioxide, wet	A	Gasoline (high-aromatic)	A	Oils: Citric	A	Sodium Nitrate	A
Aluminum Sulfate, 10%	A	Carbon Monoxide Gas	A	Glucose	A	Oils: Corn	A	Sodium Perborate	A
Alums	A	Carbonated Water (Carbonic Acid)	A	Glue, PVA (Polyvinyl Acetate)	A	Oils: Cottonseed	A	Sodium Peroxide	A
Amines	C	Carbonic Acid (Carbonated Water)	A	Glycerin	A	Oils: Diesel Fuel (20, 30, 40, 50)	A	Sodium Polyphosphate	A
Ammonia, 10%	C	Chlorine Gas, dry 10%	D	Glycolic Acid	A	Oils: Fuel (1, 2, 3, 5A, 5B, 6)	B	Sodium Silicate (Water Glass)	A
(Ammonium Hydroxide)	C	Chlorine Dioxide	D	Heptane	B	Oils: Hydraulic Oil (Petro)	C	Sodium Sulfate	A
Ammonia Nitrate	A	8% aqueous solution	C	Hexane	D	Oils: Hydraulic Oil (Synthetic)	A	(Salt Cake, Thenardite)	A
Ammonia, anhydrous	B	Chlorine Water (5-10 ppm)	B	Honey	B	Oils: Mineral	B	Sodium Sulfide	A
Ammonia, liquid	C	Chloroacetic Acid	D	Hydraulic Oil (Petro)	C	Oils: Silicone	A	Sodium Sulfite	B
Ammonium Acetate	A	Chlorobenzene (mono)	C	Hydraulic Oil (Synthetic)	A	Oils: Soybean	A	Sodium Thiosulfate (hypo)	A
Ammonium Bifluoride	A	Chlorobromomethane	C	Hydrobromic Acid, 20%	B	Oils: Turbine	C	Starch	B
Ammonium Carbonate	B	Chloroform	C	Hydrobromic Acid, 100%	B	Oleic Acid	C	Stearic Acid	B
Ammonium Chloride, 10%	A	Chlorosulfonic Acid	D	Hydrochloric Acid, 20%	A	Oxalic Acid, cold 10%	A	Stoddard's Solvent	C
Ammonium Hydroxide (Aqueous Ammonia)	A	Chromic Acid, 5%	D	Hydrochloric Acid, 37%	B	Ozone Gas	C	Sulfite Liquors	A
Ammonium Nitrate, 10%	A	Chromic Acid, 10%	D	Hydrochloric Acid, dry gas	A	Paraffin	B	Sulfur Dioxide	B
Ammonium Persulfate	A	Chromic Acid, 30%	D	Hydrofluoric Acid, 20%	A	Pentane (Amyl Hydride) C5H12	D	Sulfur Dioxide Gas, dry	A
Ammonium Phosphate, Dibasic	A	Chromic Acid, 50%	D	Hydrofluoric Acid, 50%	A	Peracetic Acid (Peroxyacetic Acid)	D	Sulfur Dioxide Gas, wet	A
Ammonium Phosphate, Monobasic	A	Citric Acid, aqueous 10%	C	Hydrofluoric Acid, 75%	A	Perchloric Acid	B	Sulfur Trioxide, dry	C
Ammonium Phosphate, Tribasic	C	Citrus Oil or Terpene (d-Limonene)	D	Hydrogen Gas	A	Peroxyacetic Acid (Peracetic Acid)	D	Sulfuric Acid, <10%	A
Ammonium Sulfate	A	Copper Sulfate, 5%	C	Hydrogen Peroxide, 10%	A	Petroleum	C	Sulfuric Acid, 10-75%	A
Ammonium Thiosulfate	A	Cresols	C	Hydrogen Peroxide, 30%	C	Phenol, 10%	B	Sulfuric Acid, 75-100%	B
Amyl Acetate	C	Cyclohexane	B	Hydrogen Peroxide, 50%	C	Phenol (Carbolic Acid)	D	Sulfuric Acid, cold concentrated	C
Amyl Chloride	D	Cyclohexanone	D	Hydrogen Peroxide, 100%	C	Phosphoric Acid, >40%	B	Sulfurous Acid, 10%	B
Aqua Regia (80% HCl, 20% HNO <sub>3</sub> )	B	Detergents	D	Hydrogen Sulfide, aqueous	A	Phosphoric Acid, crude	B	Tannic Acid, 10%	B
Arsenic Acid	B	Diacetone Alcohol	A	Hydrogen Sulfide, dry	A	Phosphoric Acid, S40%	A	Toluene (Toluol)	C
Asphalt	A	Dichlorobenzene	D	Isopropyl Alcohol (IPA, isopropanol)	A	Phosphorus	B	Trichloroacetic Acid	A
Barium Carbonate	A	Dichloroethane	C	Ketones	C	Photographic Developer	A	Trichloroethylene	D
Barium Sulfate	B	Diesel Fuel	C	Lacquer Thinners	A	Photographic Solutions	A	Trisodium Phosphate	A
Barium Sulfide	B	Diethylamine	D	Lacquers	A	Potassium Bicarbonate	A	Turpentine (COH16)	D
		Dimethylformamide (N,NDimethylformamide)	A	Lactic Acid	A	Potassium Bromide	A	Urea	A
				Ligroin	A	Potassium Chloride, up to 30%	A	Varnish	A
				Lime (CaO)	A	Potassium Dichromate	A	Vinegar	A
				Linoleic Acid	A	Potassium Ferrocyanide	A	Water, Distilled	A
				Lubricants	D	Potassium Hydroxide (Caustic Potash)	A	Water, Fresh	A
				Lye (KOH, Potassium Hydroxide)	A	Potassium Iodide	B	Water, Salt	A
				Lye (NaOH, Sodium Hydroxide)	D	Potassium Nitrate, 10%	B	Whiskey and Wines	C
				Magnesium Chloride, 10%	A	Potassium Nitrite	A	Xylene (Xylo, Dimethylbenzene)	B
				Magnesium Hydroxide, 10%	A	Potassium Permanganate	A	Zinc Chloride, 10%	A
				Malic Acid (Apple Acid) C4H6O5	B	Propene (liquefied)	C	Zinc Sulfate, 10%	A
				Mercury	A	Propylene Glycol	B		
				Methanol (Methyl Alcohol)	A	Pyridine	B		
				Methyl Acetate	B	Resorcinol (C6H6O2)	B		

# POLYETHYLENE

## ROTATIONAL AND INJECTION MOLDED PRODUCTS

**Y =** YES, RECOMMENDED

**S =** SOMETIMES, SUITABLE INTERMITTENTLY

**N =** NO, NOT RECOMMENDED

**CHEMICAL RATING**

Acetaldehyde (40%)	Y	Bromine, Liquid	N	Ethyl Alcohol	Y	Methyl Alcohol (100%)	Y	Silicone Oil	Y
Acetamide	Y	Bromine, Water	N	Ethyl Butyrate	S	Methyl Amine (32%) L	Y	Silver Salts	Y
Acetic Acid (50%)	Y	Bromobenzene	N	Ethyl Chloride	N	Methyl Bromide	N	Silver Nitrate	Y
Acetic Acid (100%)	N	Bromoform	N	Ethyl Ether	N	Methyl Chloride	N	Soda Solution (All Conc.)	Y
Acetic Acid Anhydride	S	Butadiene	Y	Ethylene Chloride	N	Methylene Chloride	N	Soda Ash	Y
Acetic Ether	S	Butane	Y	Ethylene Chlorohydrin	Y	Methyl Ethyl Ketone	S	Sodium Salts	Y
Acetone	Y	Butanediol (100%)	Y	Ethylene Diamine	Y	Methyl Isobutyl Ketone	S	Sodium Acetate Sat'd	Y
Acetylene Tetrabromide	S	Butanol	Y	Ethylene Dichloride	N	Methyl Isopropyl ketone	S	Sodium Acrylates	Y
Acrylic Emulsions	S	Butyl Acetate	Y	Ethylene Glycol	Y	Methyl Sulfate	Y	Sodium Benzoate	Y
Acrylonitrile	Y	Butyl Alcohol (100%)	Y	Ethylene Oxide	N	Methyl Sulfuric Acid (All Conc.)	Y	Sodium Bicarbonate	Y
Adipic Acid	Y	Butylene	N	Fatty Acids	Y	Milk	Y	Sodium Bisulfate (10%)	Y
Aliphatic Hydrocarbons (Hexane Octane, hexene, Octene, Etc.)	Y	Butylene Glycol	Y	Fatty Alcohol Sulfonate	Y	Mineral Oils	Y	Sodium Bisulfite	Y
Allyl Alcohol (96%)	Y	Butylene Liquid	N	Ferric Salts	Y	Molasses	Y	Sodium Bromate	S
Alum (Aqueous Solutions)	Y	Butyl Phenol	N	Ferric Sulfate	Y	Monochloroacetic Acid Ethyl Ester	Y	Sodium Bromide	Y
Aluminum Chloride (20%)	Y	Butyric Acid	Y	Ferrous Salts	Y	Monochloroacetic Acid Methyl Ester	Y	Sodium Bromide Dilute Sol.	Y
Aluminum Fluoride	Y	Calcium Carbonate	Y	Ferrous Sulfate	Y	Morpholin	Y	Sodium Carbonate	Y
Aluminum Hydrogen Solution (10%)	Y	Calcium Chloride	Y	Fertilizer Salts	Y	Mowliith D	Y	Sodium Chlorate	Y
Aluminum Hydroxide	Y	Calcium Hydroxide	Y	Fish Solubles	Y	Muriatic Acid	Y	Sodium Chloride	Y
Alums (All Types)	Y	Calcium Hypochlorite	Y	Fluoboric Acid	Y	Naptha	S	Sodium Chlorite	Y
Ammonia (Anhydrous)	Y	Calcium Nitrate (50%)	Y	Fluosilicic Acid (All Conc.)	Y	Naphthalene	Y	Sodium Chromate	Y
Ammonia (Aqueous)	Y	Calcium Sulfate	Y	Formaldehyde (40%)	Y	Nickel Salts	Y	Sodium Disulfite	Y
Ammonia (100% Dry Gas)	Y	Camphor Oil	N	Formamide	Y	Nicotine, Dilute	Y	Sodium Dithionite (10%)	Y
Ammonium Salts	Y	Carbon Disulfide	N	Formic Acid (All Conc.)	Y	Nicotinic Acid	Y	Sodium Ferricyanide	Y
Ammonium Acetate	Y	Carbonic Acid (Aq.CO2)	Y	Fruit Pulp	Y	Nitric Acid (<50%)	Y	Sodium Ferrocyanide Sat'd	Y
Ammonium Bifluoride	Y	Carbon Monoxide	Y	Fuel Oil	Y	Nitrobenzene	S	Sodium Fluoride Sat'd	Y
Ammonium Carbonate 50%	Y	Carbon Tetrachloride	N	Furfural (100%)	Y	Nitrotoluene	S	Sodium Hydroxide Conc.	Y
Ammonium Chloride	Y	Castor Oil Conc.	Y	Furfuryl Alcohol	N	Octyl Cresol	Y	Sodium Hypochlorite	Y
Ammonium Chloride	Y	Caustic (Aqueous)	Y	Gallic Acid Sat'd	Y	Oils and Fats	Y	Sodium Iodide	Y
Ammonium Hydrogen Fluoride (50%)	Y	Caustic Potash Sol. (50%)	Y	Gasoline	Y	Oleic Acid (All Conc.)	Y	Sodium Nitrate	Y
Ammonium Hydroxide	Y	Caustic Soda Sol. (10%)	Y	Gasohol	Y	Oleum Conc.	N	Sodium Oxalate	Y
Ammonium Metaphosphate Sat'd	Y	Chloral Hydrate	Y	Gelatine	Y	Olive Oil	Y	Sodium Persulfate	Y
Ammonium Nitrate (10%)	Y	Chloroethanol	Y	Gin	Y	Orange Extract	Y	Sodium Phosphate	Y
Ammonium Nitrate Sat'd	Y	Chloric Acid (10%)	Y	Gluconic Acid (All Conc.)	Y	Oxalic Acid (All Conc.)	Y	Sodium Silicate	Y
Ammonium Persulfate Sat'd	Y	Chloroacetic Acid	Y	Glucose	Y	Palmitic Acid	N	Sodium Sulfate	Y
Ammonium Phosphate	Y	Chlorobenzene	Y	Glycerine	Y	Palm Oil	S	Sodium Sulfide	Y
Ammonium Sulfate (1%)	Y	Chloroform	N	Glycol	Y	Paraffin Emulsions	Y	Sodium Sulfite	Y
Ammonium Sulfate Sat'd	Y	Chloromethane	N	Glycol Ethers	Y	Paraffin Oil	Y	Sodium Sulfonates	Y
Ammonium Sulfide Sat'd	Y	Chlorosulfonic Acid 100%	N	Glycolic Acid (All Conc.)	Y	Perchloric Acid (50%)	Y	Sodium Thiosulfate	Y
Ammonium Thiocyanate Sat'd	Y	Chrome Alum Sat'd	Y	Grape Sugar Sat'd Aq.	Y	Perchloroethylene	N	Spindle Oil	Y
Amyl Acetate	Y	Chromic Acid (50%)	S	Heptane	Y	Petroleum	Y	Stannic Salts	Y
Amyl Alcohol (100%)	Y	Cider	Y	Hexane	Y	Petroleum Ether	S	Stannous Salts	Y
Amyl Chloride	N	Citric Acid (All Conc.)	Y	Hexanol Tert	Y	Phenol (90%)	N	Starch Solution Sat'd	Y
Aniline (100%)	S	Clorox Bleach	Y	Hydrazine Hydrate	Y	Phenylhydrazine	N	Stearic Acid (All Conc.)	Y
Aniline Hydrochloride	S	Coconut Oil Alcohols	Y	Hydroxylsulfite (10%)	Y	Phosphoric Acid All Conc	Y	Succinic Acid	Y
Animal Fats	Y	Cola Concentrates	Y	Hydroxylamine Sulfate	Y	Phosphorous Chlorides	S	Sugar Solutions, Glucose, Lactose, Sucrose, etc.	Y
Anti-Freeze	Y	Compressed Air Conditioning Oil	Y	Hydrazine (35%)	Y	Phosphorous Yellow (100%)	Y	Sulfur	Y
Antimony Salts	Y	Copper Salts	Y	Hydrazine Hydrochloride	Y	Phosphorous Pentoxide	Y	Sulfuric Acid (98%)	S
Antimony Trichloride 90%	Y	Copper Cyanide	Y	Hydroiodic Acid (All Conc.)	Y	Photographic Solutions	Y	Sulfuric Acid, Fuming	N
Aqua Regia	N	Copper Nitrate	Y	Hydrobromic Acid (50%)	Y	Phthalic Acid (All Conc.)	Y	Sulfurous Acid	N
Aqueous Salt Solutions (NaCl)	Y	Copper Sulfate	Y	Hydrocyanic Acid Sat'd	Y	Phthalic Anhydride	Y	Sulfuryl Chloride	N
Aqueous Alkalies (NaOH)	Y	Corn Oil	Y	Hydrochloric Acid (All Conc.)	Y	Pickling Baths, Sulfuric Acid, Hydrochloric Acid	Y	Tallow	Y
Arsenic Acid	Y	Cottonseed Oil	Y	Hydrofluoric Acid (All Conc.)	Y	Picric Acid (1%)	Y	Tannic Acid	Y
Arsenic Salts	Y	Cresol (90%)	Y	Hydrofluorilicic Acid (All Conc.)	Y	Plating Solutions	Y	Tanning Extracts	Y
Barium Salts	Y	Cresylic Acid	Y	Hydrogen Bromide (10%)	Y	Potash	Y	Tartaric Acid Sat'd	Y
Barium Carbonate	Y	Crotonic Aldehyde	Y	Hydrogen Peroxide (90%)	Y	Potassium/Aluminum Sulfates (50%)	Y	Tetrachloroethane	N
Barium Chloride	Y	Cuprous Chloride Sat'd	Y	Hydroquinone	Y	Potassium Bichromate	Y	Tetrachloroethylene	N
Barium Cyanide	Y	Cyclohexane	Y	Hydroquinone	Y	Potassium Borate (10%)	Y	Tetraethyl Lead	N
Barium Hydroxide	Y	Cyclohexanol	Y	Hydrogen Sulfide	Y	Potassium Bromide	Y	Tetrahydrofuran	N
Barium Nitrate	Y	Cyclohexanone	S	Hypochlorous Acid	Y	Potassium Chlorate	Y	Tetrahydronaphthalene	N
Barium Sulfate	Y	Detergents, General	Y	Inks	Y	Potassium Chloride	Y	Thionyl Chloride	N
Barium Sulfide	Y	Developer, Photographic	Y	Iodine (Alc. Sol.) Conc.	Y	Potassium Chromate	Y	Tin Salts	Y
Battery Fluid Acid	S	Dextrin Sat'd	Y	Iron Salts	Y	Potassium Cyanide	Y	Titanium Salts	S
Beef Tallow Emulsion, Sulfonated	Y	Dextrose Sat'd	Y	Iso-Octane	S	Potassium Dichromate 40%	Y	Toluene	S
Beer	Y	Dibutyl Ether	N	Isopropyl Acetate	Y	Potassium Ferri/ Ferro Cyanide Sat'd	Y	Toluene Sulfonic Acid (All Conc.)	S
Benzaldehyde	Y	Dibutylphthalate	S	Isopropyl Alcohol	Y	Potassium Fluoride	Y	Transformer Oil	Y
Benzene	Y	Dibutyl Sebacate	S	Isopropyl Ether	N	Potassium Hydroxide	Y	Tributylphosphate	Y
Benzene Sulfonic Acid	S	Dichloroacetic Acid	S	Jet fuel	S	Potassium Iodide	Y	Trichloroacetic Acid	S
Benzoic Acid	Y	Dichloroacetic Acid, Methyl Ester	S	Kerosene	Y	Potassium Nitrate Sat'd	Y	Trichloroethane	N
Benzyl Alcohol	Y	Dichlorobenzene, Liquid	N	Lactic Acid (All Conc.)	Y	Potassium Perborate Sat'd	Y	Trichloroethylene	N
Benzyl Chloroformate	Y	Dichloroethylene	N	Lanolin	Y	Potassium Perchlorate	Y	Tricresyl Phosphate	Y
Bismuth Salts	Y	Diesel Fuel	S	Latex	Y	Potassium Permanganate	Y	Triethanolamine	Y
Bleach Lye (10%)	S	Diesel Oil	S	Lead Salts	Y	Potassium Persulfate Sat'd	Y	Triethyl Phosphate	N
Black Liquor	Y	Diethyl Carbonate	Y	Lead Acetate Sat'd	Y	Potassium Phosphates	Y	Trisodium Phosphate Sat'd	Y
Borax Cold Sat'd	Y	Diethyl Phthalate	Y	Lime	Y	Potassium Sulfate	Y	Trichloroethylene	N
Boric Acid Dilute	Y	Diazo Salts	Y	Linseed Oil	Y	Propanol	Y	Turpentine Oil	Y
Boric Acid Conc.	Y	Diethylene Glycol	Y	Lithium Salts	Y	Propargyl Alcohol (7%)	Y	Urea	N
		Diethanolamine	Y	Lube Oil	Y	Propionic Acid (50%)	Y	Urine	Y
		Diglycolic Acid (30%)	Y	Magnesium Salts	Y	Propyl Alcohol	Y	Vegetable Oils	Y
		Di-Isobutyl Ketone	S	Magnesium Carbonate	Y	Propylene Dichloride (100%)	Y	Vinegar	Y
		Dimethylamine	S	Magnesium Hydroxide	Y	Propylene Glycol	Y	Vanilla Extract	Y
		Dimethyl Formamide	S	Magnesium Nitrate	Y	Propylene Oxide	Y	Wax Alcohol	N
		Dinonyl Phthalate	N	Magnesium Oxide	Y	Pyridine	S	Wetting Agents	Y
		Diocetyl Phthalate	N	Magnesium Sulfate	Y	Rayon Coagulation Salts	Y	Whisky	Y
		Dioxane	Y	Maleic Acid	Y	Rust Inhibitors	Y	White Acid (75%)	Y
		Diphenyl Oxide	N	Malic Acid (1%)	Y	Sea Water	Y	Wine	Y
		Electrolyte	Y	Mercuric Salts	Y	Selenic Acid	Y	Xylene	N
		Emulsions, Photographic	Y	Mercurous Salts	Y	Sewage	Y	Yeast	Y
		Ethanol	Y	Mercury	Y	Shortening	Y	Zinc Salts	Y
		Ether	N	Methanol	Y	Silicic Acid	Y	Zinc Sulfate	Y
		Ethyl Acetate (100%)	S	Methyl Acetate	Y				



# PVC

## SNAP-UP PVC, YELLOW JACKET, AND IBC BERM

**A =** EXCELLENT

**B =** GOOD, MINOR EFFECT, SLIGHT CORROSION OR DISCOLORATION

**C =** FAIR, MODERATE EFFECT, NOT RECOMMENDED FOR CONTINUOUS USE

**D =** SEVERE EFFECT, NOT RECOMMENDED FOR ANY USE

CHEMICAL	RATING								
Acetaldehyde	D	Benzoic Acid	A	Ethanol	C	Lead Nitrate	A	Oils: Transformer	B
Acetamide	D	Bleaching Liquors	A	Ethanolamine	D	Lead Sulfamate	D	Oils: Turbine	A
Acetate Solvent	D	Borax (Sodium Borate)	A	Ether	D	Lime	D	Oleic Acid	C
Acetic Acid	D	Boric Acid	A	Ethyl Acetate	D	Linoleic Acid	D	Oleum 100%	D
Acetic Acid 20%	D	Bromine	C	Ethyl Benzoate	D	Lithium Chloride	D	Oleum 25%	D
Acetic Acid 80%	C	Butadiene	C	Ethyl Chloride	D	Lubricants	B	Oxalic Acid (cold)	B
Acetic Acid, Glacial	D	Butane	C	Ethyl Ether	D	Lye: Ca(OH) <sub>2</sub> Calcium Hydroxide	B	Ozone	B
Acetic Anhydride	D	Buttermilk	A	Ethylene Bromide	D	Lye: KOH Potassium Hydroxide	B	Palmitic Acid	B
Acetone	D	Butyl Amine	D	Ethylene Chloride	D	Lye: NaOH Sodium Hydroxide	A	Paraffin	A
Acetyl Bromide	D	Butyl Ether	A	Ethylene Chlorohydrin	D	Magnesium Bisulfate	A	Pentane	B
Acetyl Chloride (dry)	C	Butylacetate	D	Ethylene Diamine	D	Magnesium Carbonate	B	Perchloric Acid	C
Acetylene	A	Butylene	C	Ethylene Dichloride	D	Magnesium Chloride	B	Perchloroethylene	C
Acrylonitrile	B	Butyric Acid	B	Ethylene Glycol	A	Magnesium Hydroxide	A	Petrolatum	B
Adipic Acid	A	Calcium Bisulfide	A	Ethylene Oxide	D	Magnesium Nitrate	A	Phenol (10%)	C
Alcohols: Amyl	A	Calcium Bisulfite	B	Fatty Acids	A	Magnesium Sulfate (Epsom Salts)	A	Phenol (Carbolic Acid)	D
Alcohols: Benzyl	D	Calcium Carbonate	A	Ferric Chloride	A	Maleic Acid	A	Phosphoric Acid (>40%)	B
Alcohols: Butyl	A	Calcium Chlorate	B	Ferric Nitrate	A	Malic Acid	A	Phosphoric Acid (crude)	B
Alcohols: Diacetone	B	Calcium Chloride	C	Ferric Sulfate	A	Manganese Sulfate	C	Phosphoric Acid (molten)	D
Alcohols: Ethyl	B	Calcium Hydroxide	B	Ferrous Chloride	A	Mayonnaise	D	Phosphoric Acid (S40%)	B
Alcohols: Hexyl	A	Calcium Hypochlorite	B	Ferrous Sulfate	A	Melamine	D	Phosphorus	A
Alcohols: Isobutyl	A	Calcium Nitrate	A	Fluoboric Acid	D	Mercuric Chloride (dilute)	A	Phosphorus Trichloride	D
Alcohols: Isopropyl	A	Calcium Oxide	B	Fluorine	D	Mercuric Cyanide	A	Photographic Developer	A
Alcohols: Methyl	A	Calcium Sulfate	B	Fluosilicic Acid	D	Mercurous Nitrate	A	Photographic Solutions	A
Alcohols: Propyl	A	Cane Juice	A	Formaldehyde 100%	A	Mercury	A	Phthalic Anhydride	D
Aluminum Chloride	A	Carbolic Acid (Phenol)	D	Formaldehyde 40%	A	Methane	B	Picric Acid	D
Aluminum Chloride 20%	A	Carbon Bisulfide	D	Formic Acid	A	Methanol (Methyl Alcohol)	A	Fluoborate Plating	A
Aluminum Fluoride	A	Carbon Dioxide (dry)	A	Freon 113	B	Methyl Acetate	D	Potash (Potassium Carbonate)	A
Aluminum Hydroxide	A	Carbon Dioxide (wet)	A	Freon 12	A	Methyl Acetone	D	Potassium Bicarbonate	A
Aluminum Nitrate	B	Carbon Disulfide	D	Freon 22	A	Methyl Alcohol 10%	A	Potassium Bromide	A
Aluminum Potassium Sulfate 10%	A	Carbon Tetrachloride	D	Freon TF	B	Methyl Bromide	D	Potassium Chlorate	A
Aluminum Potassium Sulfate 100%	A	Carbonated Water	A	Freonr 11	A	Methyl Butyl Ketone	A	Potassium Chloride	A
Aluminum Sulfate	A	Carbonyl Sulfide	A	Freonr 12	A	Methyl Cellosolve	D	Potassium Chromate	A
Amines	D	Carbonyl Sulfide	A	Furan Resin	A	Methyl Chloride	D	Potassium Cyanide Solutions	A
Ammonia 10%	B	Carbon Monoxide	B	Furfural	D	Methyl Dichloride	A	Potassium Dichromate	A
Ammonia Nitrate	B	Carbon Tetrachloride	D	Gallic Acid	B	Methyl Ethyl Ketone	D	Potassium Ferricyanide	A
Ammonia, anhydrous	A	Carbonated Water	A	Gasoline (high-aromatic)	A	Methyl Isobutyl Ketone	D	Potassium Ferrocyanide	A
Ammonia, liquid	A	Carbonyl Sulfide	D	Gasoline, leaded, ref.	B	Methyl Isopropyl Ketone	D	Potassium Hydroxide	A
Ammonium Acetate	A	Carbonyl Sulfide	D	Gasoline, unleaded	C	Methyl Methacrylate	A	(Caustic Potash)	B
Ammonium Bifluoride	A	Chlorine	A	Gelatin	B	Methylamine	D	Potassium Hypochlorite	A
Ammonium Carbonate	A	Chlorine (dry)	A	Glucose	A	Methylene Chloride	D	Potassium Iodide	A
Ammonium Chloride	A	Chlorine Water	A	Glue, P.V.A.	C	Milk	A	Potassium Nitrate	A
Ammonium Hydroxide	A	Chlorine, Anhydrous Liquid	D	Glycerin	A	Mineral Spirits	C	Potassium Permanganate	A
Ammonium Nitrate	A	Chloroacetic Acid	B	Glycolic Acid	B	Molasses	A	Potassium Sulfate	A
Ammonium Oxalate	A	Chlorobenzene (Mono)	D	Grape Juice	A	Monoethanolamine	D	Potassium Sulfide	A
Ammonium Persulfate	A	Chlorobromomethane	D	Grease	A	Motor oil	B	Propane (liquefied)	A
Ammonium Phosphate, Dibasic	A	Chloroform	D	Heptane	C	Mustard	B	Propylene	B
Ammonium Phosphate, Monobasic	A	Chloroform	D	Hexane	B	Naphtha	C	Propylene Glycol	C
Ammonium Phosphate, Tribasic	A	Chlorosulfonic Acid	D	Honey	A	Naphthalene	D	Pyridine	D
Ammonium Sulfate	A	Chromic Acid 10%	A	Hydraulic Oil (Petro)	A	Natural Gas	A	Pyrogallic Acid	A
Ammonium Sulfite	A	Chromic Acid 30%	A	Hydraulic Oil (Synthetic)	A	Nickel Chloride	A	Resorcinol	C
Amyl Acetate	D	Chromic Acid 5%	A	Hydrobromic Acid 100%	D	Nickel Nitrate	A	Rosins	C
Amyl Alcohol	A	Chromic Acid 50%	D	Hydrobromic Acid 20%	B	Nickel Sulfate	A	Rum	A
Amyl Chloride	D	Chromium Salts	A	Hydrochloric Acid 100%	D	Nitrating Acid (<15% HNO <sub>3</sub> )	D	Salicylic Acid	B
Aniline	C	Cider	A	Hydrochloric Acid 20%	A	Nitrating Acid (>15% H <sub>2</sub> SO <sub>4</sub> )	D	Salt Brine (NaCl saturated)	A
Aniline Hydrochloride	B	Citric Acid	B	Hydrochloric Acid 37%	B	Nitrating Acid (51% Acid)	D	Sea Water	A
Antifreeze	A	Cloroxr (Bleach)	A	Hydrochloric Acid Dry Gas	A	Nitrating Acid (S15% H <sub>2</sub> SO <sub>4</sub> )	D	Silicone	A
Antimony Trichloride	A	Copper Chloride	A	Hydrocyanic Acid	B	Nitric Acid (20%)	A	Silver Nitrate	A
Aqua Regia (80% HCl, 20% HNO <sub>3</sub> )	C	Copper Cyanide	A	Hydrocyanic Acid (Gas 10%)	A	Nitric Acid (50%)	B	Soap Solutions	A
Aromatic Hydrocarbons	D	Copper Fluoborate	A	Hydrofluoric Acid (<50%)	B	Nitric Acid (Concentrated)	B	Soda Ash (see Sodium Carbonate)	A
Arsenic Acid	A	Copper Nitrate	A	Hydrofluoric Acid >50%	C	Nitrobenzene	B	Sodium Acetate	B
Arsenic Salts	A	Copper Sulfate >5%	A	Hydrofluosilicic Acid 100%	B	Nitromethane	B	Sodium Benzoate	B
Asphalt	A	Cresols	D	Hydrofluosilicic Acid 20%	A	Nitrous Acid	A	Sodium Bicarbonate	A
Barium Carbonate	A	Cresylic Acid	D	Hydrogen Gas	A	Nitrous Oxide	A	Sodium Bisulfate	A
Barium Chloride	D	Cupric Acid	D	Hydrogen Peroxide 10%	A	Oils: Aniline	D	Sodium Bisulfite	A
Barium Cyanide	A	Cyclohexane	D	Hydrogen Peroxide 100%	A	Oils: Castor	D	Sodium Borate (Borax)	A
Barium Hydroxide	A	Cyclohexanone	D	Hydrogen Peroxide 30%	A	Oils: Cinnamon	A	Sodium Bromide	B
Barium Nitrate	A	Detergents	A	Hydrogen Peroxide 50%	A	Oils: Citric	D	Sodium Carbonate	A
Barium Sulfate	B	Diacetone Alcohol	D	Hydrogen Sulfide (aqua)	B	Oils: Coconut	A	Sodium Chlorate	A
Barium Sulfide	A	Dichlorobenzene	D	Hydrogen Sulfide (dry)	A	Oils: Cod Liver	A	Sodium Chloride	A
Beer	A	Dichloroethane	D	Hydroquinone	B	Oils: Diesel Fuel Oil (20, 30, 40, 50)	B	Sodium Cyanide	A
Beet Sugar Liquids	A	Diesel Fuel	A	Hydroxyacetic Acid 70%	C	Oils: Diesel Fuel Oil (1, 2, 3, 5A, 5B, 6)	B	Sodium Ferrocyanide	A
Benzaldehyde	D	Diethyl Ether	D	Ink	C	Oils: Hydraulic Oil (Petro)	A	Sodium Fluoride	B
Benzene	C	Diethylamine	C	Iodine	A	Oils: Hydraulic Oil (Synthetic)	A	Sodium Hydroxide (80%)	A
Benzene Sulfonic Acid	A	Diethylene Glycol	D	Iodine (in alcohol)	A	Oils: Linseed	A	Sodium Hypochlorite (<20%)	A
		Dimethyl Aniline	D	Iodoform	A	Oils: Mineral	B	Sodium Hypochlorite (100%)	B
		Dimethyl Formamide	D	Isocetane	A	Oils: Olive	C	Sodium Metaphosphate	A
		Dyes	B	Isopropyl Acetate	D	Oils: Orange	C	Sodium Metasilicate	A
		Epsom Salts (Magnesium Sulfate)	A	Isopropyl Ether	B	Oils: Palm	A	Sodium Nitrate	A
		Ethane	A	Jet Fuel (JP3, JP4, JP5)	C	Oils: Peanut	D	Sodium Perborate	A
				Kerosene	A	Oils: Pine	D	Sodium Peroxide	B
				Ketones	D	Oils: Rosin	D	Sodium Polyphosphate	A
				Lacquer Thinners	D	Oils: Sesame Seed	A	Sodium Silicate	A
				Lacquers	D	Oils: Silicone	A	Sodium Sulfate	A
				Lactic Acid	B	Oils: Soybean	B	Sodium Sulfide	A
				Lard	A			Sodium Sulfite	A
				Lead Acetate	B			Sodium Tetraborate	A
								Sodium Thiosulfate (hypo)	A



# ► CODES AND REGULATIONS:

## CODES AND REGULATIONS

### **DOT 49 CFR 173.3 (C) SALVAGE DRUMS:**

Packages of hazardous materials that are damaged, defective, or found leaking and hazardous materials that have spilled or leaked may be placed in a metal or plastic removable head salvage drum that is compatible with lading and shipped for repackaging or disposal under the following conditions:

- Drum must be a UN 1A2, 1B2, 1N2 or 1H2 tested and marked for Packing Group III or higher performance standards for liquids or solids and a leakproof test of 20 kPa (3 psi).
- Capacity of the drum may not exceed 450 L (119 gallons).
- Each drum shall be provided when necessary with sufficient cushioning and absorption material to prevent excessive movement of the damaged package and to eliminate the presence of any free liquid at the time the salvage drum is closed. All cushioning and absorbent material used in the drum must be compatible with the hazardous material.
- Packaging must be marked "SALVAGE" or "SALVAGE DRUM". (The overpack requirements of Section 173.25 do not apply to drums used in accordance with this paragraph.)

### **EPA 40 CFR 264.175 CONTAINMENT:**

Ref (b)(3) The containment system must have sufficient capacity to contain 10% of the volume of containers or the volume of the largest container, whichever is greater.

### **EPA 40 CFR 112 SPILL PREVENTION, CONTROL AND COUNTERMEASURE (SPCC):**

The purpose of the SPCC regulation is prevention of oil discharge into navigable waters and related areas, rather than cleanup after a spill has occurred. The regulation generally affects all facilities with at least 1,320 gallons above ground storage capacity, or 42,000+ gallons underground storage capacity. The SPCC requires affected facilities to prepare and file an action plan (the SPCC Plan).

Some affected facilities include: onshore and offshore drilling, platforms, barges and mobile facilities; fixed and mobile onshore or offshore production; oil refining and storage; any industrial, commercial, agricultural or public facility that uses or stores oil; some waste treatment operations; loading racks, transfer hoses and related equipment; vehicles and pipelines. Oils, fats and greases of any kind or in any form are specifically included in the regulation.

The SPCC Plan must include elements such as: Operating procedures to prevent oil spills; Control measures to prevent spilled oil from entering surface water; Countermeasures such as Secondary Containment for spills and bulk storage compliance; Professional Engineer certification; Management approval; Facility inspections; Security; Training and more. More information is available at [www.epa.gov/oilspill](http://www.epa.gov/oilspill).

### **EPA 40 CFR 122.26 STORMWATER REGULATIONS, NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM (NPDES):**

The NPDES permit program controls water pollution by regulating point sources and non-point sources that discharge pollutants into United States waters. These regulations are a key component of EPA's Clean Water Act. The goal is to protect the quality of waterways by reducing the discharge of sediment, oil and chemicals into storm drains, surface and ground waters.

NPDES requires Minimum Control Measures to be put into place by activities in affected Urbanized Areas (UA). Visit [www.epa.gov/owm](http://www.epa.gov/owm) (US EPA Office of Wastewater Management), Appendix 6 to determine particular affected places.

This program includes the development and implementation of the Stormwater Pollution Prevention Plan (SWPPP). The SWPPP identifies: Potential Sources of Pollution and Exposed Materials; a history of past spills and leaks; BMPs; Non-Structural controls (Good Housekeeping Practices, Spill Prevention and Response); Structural controls such as Containment including Pollution Incident Prevention Plans (PIPP) and Spill Prevention, Control, and Countermeasures (SPCC) plans.



**29 CFR 1910.120 HAZARDOUS WASTE OPERATIONS AND EMERGENCY RESPONSE:**

Suitable quantities of proper absorbents shall be kept available and used in areas where spills, leaks or ruptures may occur.

**29 CFR 1910.22 WORKPLACE HOUSEKEEPING:**

Every workroom floor shall be maintained in a clean and, so far as possible, a dry condition.

**29 CFR 1910.1450**

Laboratories must have containment and clean-up materials for spills and leaks to reduce occupational exposure to hazardous chemicals.

**29 CFR 1910.178(G)(2)**

Facilities shall be provided for flushing and neutralizing spilled electrolyte, for fire protection, for protecting charging apparatus from damage by trucks, and for adequate ventilation for dispersal of fumes from gassing batteries. (Battery Storage)

**40 CFR 263.31**

Transport and carriers must clean up any hazardous waste discharge that occurs during transportation.

**49 CFR 171.8 OVERPACK CONTAINERS:**

An Overpack is a larger container in which a smaller one can be placed. Made from any material (from traditional metal to hard plastic). Overpack drums are protective packaging to contain non-hazardous materials or provide outer protection. Note: Standard Overpacks are not for hazard waste transport. In these cases, a Salvage Drum is needed.

**UFC 79.406 UNIFORM FIRE CODE:**

When used as a substitute for spill and damage control and secondary containment, pallets shall comply with: liquid-tight sump; sump capacity of at least 66 gallons ; compatible substances; provide sump protection from rain water.

**IFC 2704.2.3 INTERNATIONAL FIRE CODE:**

When used as an alternative to spill control and secondary containment for outdoor storage, containment pallets shall comply with all of the following: liquid-tight sump accessible for visual inspection shall be provided, The sump shall be designed to contain not less than 66 gallons, Exposed surfaces shall be compatible with material stored, Containment pallets shall be protected to prevent collection of rainwater within the sump.

**NFPA 30 FLAMMABLE AND COMBUSTIBLE LIQUIDS:**

Warehouses, separate buildings containing flammable and combustible liquids whose flash point does not exceed 100°F.

**NFPA 70 NATIONAL ELECTRICAL:**

Covers the installation of electrical conductors, equipment, and raceways; signaling and communications conductors, and optical fiber cables.

**NFPA 400 HAZARDOUS MATERIALS:**

Applies to the storage, use, and handling of hazardous materials in all occupancies and facilities including nitrites, corrosives, flammables, peroxide formulations, oxidizers, water-reactives, compressed gases, and cryogenic fluids.

**OSHA 29 CFR 1910.253 STORAGE OF CYLINDERS:**

Cylinders shall not be kept in unventilated enclosures such as lockers and cupboards. (b)(2)(ii) Cylinders should be kept at least 20 ft. (6.1 m.) from highly combustible materials, should be placed away from elevators, stairs and gangways. (b)(3)(i) For storage in excess of 2,000 cu. ft. (56 cu. m.) total gas capacity of cylinders or 300 lbs. (135.9 kg.) of liquefied petroleum gas, separate rooms or compartments shall be provided.

**FM (FACTORY MUTUAL) GLOBAL 6049:**

A combination of pressure-relieving (venting) and pressure resisting exterior construction which is intended to mitigate over-pressure damage to the building in case of a vapor-air deflagration. The design of relieving and resisting features must be engineered to account for fuel, surface area, or the enclosure, vent area and structural loads imposed by the deflagration.





34355 Melinz Parkway  
Eastlake, Ohio 44095 USA  
1-800-9ENPAC9 (1-800-936-7229)  
[www.ENPAC.com](http://www.ENPAC.com)